

高速光耦

HLM600 HLM601 HLM611

High Speed Photo Coupler High Speed 10MBit/s Logic Gate

概述 Description

HLM600、HLM601、HLM611 内部有一个 850nm 的 AlGaAs LED，其光学耦合到具有选通输出的超高速集成光电检测器。这些器件采用 5 引脚外形封装，符合标准封装外形。

The optocoupler HLM60、HLM601、HLM611 consist of a 850 nm AlGaAs LED, optically coupled to a very high speed integrated photo-detector logic gate with a strobable output. The devices are packaged in a 5-pin small outline package which conforms to the standard footprint.

特性 Features

- 输入-输出隔离电压 ($V_{ISO}=3750\text{ Vrms}$)
High isolation voltage between input and output($V_{ISO}=3750\text{ Vrms}$)
- 工作温度: $-40^{\circ}\text{C}\sim 85^{\circ}\text{C}$
Operating Temperature: $-40^{\circ}\text{C}\sim 85^{\circ}\text{C}$
- 符合加强绝缘标准
Meet reinforced insulation standards
- 符合安规标准: UL 1577, VDE DIN EN60747-5-5 (VDE 0884-5), CQC11-471543-2022
Safety standards approval: UL 1577, VDE DIN EN60747-5-5 (VDE 0884-5), CQC11-471543-2022


应用 Applications

- 开关电源, 智能电表
Switching power supply, intelligent meter
- 工业控制, 测量仪器
Industrial control, measuring instruments
- 办公设备, 比如复印机
Office equipment such as copiers
- 家用电器, 比如空调、风扇、热水器等
Household appliances: such as air conditioners, fans, water heaters, etc.


真值表 Truth table

LED	VO
OFF	H
ON	L

封装和原理图 Package and Schematic Diagram



SOP5



Pin Configuration

1. Anode
2. Cathode
3. GND
4. VO
5. VCC

注: 在引脚 3 和 5 之间必须连接一个 0.1uF 的旁路电容器。

Note: 0.1uF bypass capacitor must be connected between pins 3 and 5.

Beijing Hongli Kunpeng International Trade Co., Ltd.

Tel: 86-10-57891098 MP:86-13001179378 Mail: info@hlkpint.com or lucyliu0807@163.com

产品型号命名规则 Order Code


HL M6XX - UN Y - W (V) (ZZ)

① ② ③ ④ ⑤ ⑥ ⑦

- ① 公司代码 Company Code (HL: 鸿利鲲鹏 Hongli Kunpeng)
- ② 产品系列 Product Series (XX: 00, 01, 11)
- ③ 框架类型 Lead Frame (Cu: 铜框架 Copper)
- ④ 树脂类型 Epoxy Type (H: 无卤 Halogen-free)
- ⑤ 封装形式 Package (S: SOP)
- ⑥ 器件工作温度范围 Device Operating Temperature Range (特殊范围需填或者空白 Special Range need to be filled in or left blank)
- ⑦ 内部补充代码 Internal Supplementary Code (数字或者空白 Number or None)

印字信息 Marking Information

- 印字中的“XX”代表产品分档: 00、01、11
“XX”denotes the classification: 00、01、11
- 印字中“Y”代表年份; A(2018),B(2019),C(2020).....
“Y”denotes YEAR: A(2018), B(2019), C(2020).....
- 印字中“WW”代表周号
“WW”denotes week's number
- 印字中“N”代表星期几
“N”denotes the day of the week
- 印字中的“H”代表无卤
“H”denotes Halogen-free

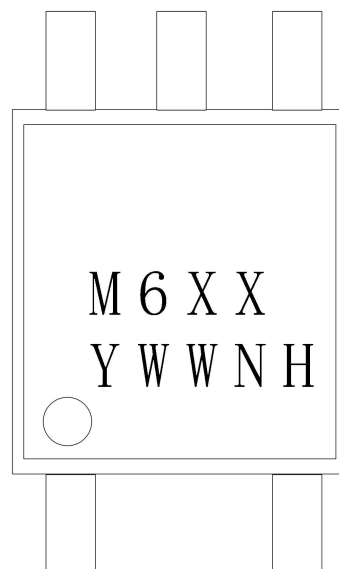

高速光耦

HLM600 HLM601 HLM611

High Speed Photo Coupler High Speed 10MBit/s Logic Gate

绝缘和安规信息 Insulation and Safety related specifications

项目 Item	符号 Symbol	数值 Value	单位 Unit	备注 Remark
爬电距离 Creepage Distance	L	> 5.0	mm	从输入端到输出端，沿本体最短距离路径 Measured from input terminals to output terminals, shortest distance path along body
电气间隙 Clearance Distance	L	> 5.0	mm	从输入端到输出端，通过空气的最短距离 Measured from input terminals to output terminals, shortest distance through air
绝缘距离 Insulation Thickness	DTI	> 0.4	mm	发射器和探测器之间的绝缘厚度 Insulation thickness between emitter and detector
峰值隔离电压 Peak Isolation Voltage	V_{IORM}	600	V_{peak}	DIN/EN/IEC EN60747-5-5
瞬态隔离电压 Transient isolation voltage	V_{IOTM}	5000	V_{peak}	DIN/EN/IEC EN60747-5-5
隔离电压 Isolation Voltage	V_{iso}	> 3750	V_{rms}	For 1 min

极限参数 Absolute Maximum Ratings (Ta=25°C)

参数 Parameter		符号 Symbol	额定值 Rating	单位 Unit
发射端 Input	正向电流 Forward Current	I_F	50	mA
	反向电压 Reverse Voltage	V_R	5	V
	功耗 Power Dissipation	P_D	100	mW
接收端 Output	电源电压 Supply Voltage	V_{CC}	7.0	V
	输出电流 Output Current	I_O	50	mA
	输出电压 Output Voltage	V_O	7.0	V
	集电极功耗 Collector Power Dissipation	P_C	85	mW
工作温度 Operating Temperature		T_{opr}	-40~+85	°C
存储温度 Storage Temperature		T_{stg}	-55~+125	°C
焊接温度 Soldering Temperature		T_{sol}	260	°C

Beijing Hongli Kunpeng International Trade Co., Ltd.

Tel: 86-10-57891098 MP:86-13001179378 Mail: info@hlkpint.com or lucyliu0807@163.com

高速光耦

HLM600 HLM601 HLM611

High Speed Photo Coupler High Speed 10MBit/s Logic Gate

推荐工作条件 Recommended Operating Conditions

参数 Parameter	符号 Symbol	最小值 Min.	最大值 Max.	单位 Unit
电源电压 Supply Voltages	V_{CC}	4.5	5.5	V
高电平输入电流 Input Current , High level	I_{FH}	5	10.0	mA
低电平输入电流 Input Current , Low level	I_{FL}	0	250	μA
操作温度 Operating Temperature	T_a	-40	+85	$^{\circ}C$

产品特性参数 Electro-optical Characteristics ($T_a=25^{\circ}C$)

参数 Parameter	符号 Symbol	条件 Condition	最小 Min.	典型 Typ.	最大 Max.	单位 Unit
发射端 Input	正向电压 Forward Voltage	V_F $I_F=10mA$	-	1.33	1.8	V
	反向击穿电压 Reverse Breakdown Voltage	BV_R $I_R=10\mu A$	5	-	-	V
	电容 Capacitance	C_{IN} $V=0, f=1MHz$	-	70	-	pF
	正向电压的温度系数 Diode Temperature Coefficient	$\Delta V_F/\Delta T_A$ $I_F=10mA$	-	-1.9	-	mV/ $^{\circ}C$
接收端 Output	高电平电源电流 High Level Supply Current	I_{CCH} $V_{CC}=5.5V, I_F=0mA$	-	6.0	9	mA
	低电平电源电流 Low Level Supply Current	I_{CCL} $V_{CC}=5.5V, I_F=0mA$	-	7.5	10	mA
传输特性 Transfer Characteristics	高电平输出电流 HIGH Level Output Current	I_{OH} $V_{CC}=5.5V$ $V_O=5.5V$ $I_F=250\mu A$	-	2.1	30	μA
	低电平输出电压 LOW Level Output Voltage	V_{OL} $V_{CC}=5.5V$ $I_F=5mA$ $I_{CL}=13mA$	-	0.4	0.6	V
	输入阈值电流 Input Threshold Current	I_{TH} $V_{CC}=5.5V$ $V_O=0.6V$ $I_{OL}=13mA$	-	2.4	5	mA
隔离电压 Isolation Voltage	V_{ISO}	$R_H<50\%$ $T_A=25^{\circ}C$ $I_{I-O}\leq 50\mu A$	3750	-	-	V_{RMS}
电阻 (输入到输出) Resistance (Input to Output)	R_{I-O}	$V_{I-O}=500V$	-	10^{12}	-	Ω
电容 (输入到输出) Resistance (Input to Output)	C_{I-O}	$f=1MHz$	-	0.6	-	pF

Beijing Hongli Kunpeng International Trade Co., Ltd.

Tel: 86-10-57891098 MP:86-13001179378 Mail: info@hlkpint.com or lucyliu0807@163.com

高速光耦

HLM600 HLM601 HLM611

High Speed Photo Coupler High Speed 10MBit/s Logic Gate

开关特性 Switching Specification($T_A=25^{\circ}\text{C}$, $I_F=7.5\text{mA}$, $V_{CC}=5.0\text{V}$)

参数 Parameter	符号 Symbol	条件 Condition	最小 Min.	典型 Typ.	最大 Max.	单位 Unit
输出高电平传播延迟 Propagation Delay Time to High Output Level	T_{PLH}	$C_L=15\text{pF}$ $R_L=350\Omega$ $T_A=25^{\circ}\text{C}$	-	41	100	ns
输出低电平传播延迟 Propagation Delay Time to Low Output Level	T_{PHL}		-	50	100	ns
脉宽失真 Pulse Width Distortion	$ T_{PHL}-T_{PLH} $		-	9	35	ns
输出上升时间(10% - 90%) Output Rise Time (10 to 90%)	t_r		-	40	-	ns
输出下降时间(90% - 10%) Output Fall Time (90 to 10%)	t_f		-	10	-	ns
传播延迟偏斜 Propagation Delay Skew	t_{psk}		-	-	40	ns
输出高电平共模瞬态抑制 Common Mode Transient Immunity at High Output Level	M600	$T_A=25^{\circ}\text{C}$, $I_F=0\text{mA}$ $ V_{CM} =10\text{V(Peak)}$ $V_{OH}=2.0\text{V}$, $R_L=350\Omega$	-	-	-	V/ μs
	M601	$T_A=25^{\circ}\text{C}$, $I_F=0\text{mA}$ $ V_{CM} =50\text{V(Peak)}$ $V_{OH}=2.0\text{V}$, $R_L=350\Omega$	5000	-	-	
	M611	$T_A=25^{\circ}\text{C}$, $I_F=0\text{mA}$ $ V_{CM} =1000\text{V(Peak)}$ $V_{OH}=2.0\text{V}$, $R_L=350\Omega$	20000	-	-	
输出低电平共模瞬态抑制 Common Mode Transient Immunity at Low Output Level	M600	$I_F=7.5\text{mA}$, $V_{OL}=0.8\text{V}$ $R_L=350\Omega$, $T_A=25^{\circ}\text{C}$ $ V_{CM} =10\text{V(Peak)}$	-	-	-	V/ μs
	M601	$I_F=7.5\text{mA}$, $V_{OL}=0.8\text{V}$ $R_L=350\Omega$, $T_A=25^{\circ}\text{C}$ $ V_{CM} =50\text{V(Peak)}$	5000	-	-	
	M611	$I_F=7.5\text{mA}$, $V_{OL}=0.8\text{V}$ $R_L=350\Omega$, $T_A=25^{\circ}\text{C}$ $ V_{CM} =1000\text{V(Peak)}$	20000	-	-	

Beijing Hongli Kunpeng International Trade Co., Ltd.

Tel: 86-10-57891098 MP:86-13001179378 Mail: info@hlkpint.com or lucyliu0807@163.com

高速光耦

HLM600 HLM601 HLM611

High Speed Photo Coupler High Speed 10MBit/s Logic Gate

典型光电特性曲线 Typical Electro-Optical Characteristics Curves

Fig.1 Low-level voltage vs. Ambient temperature

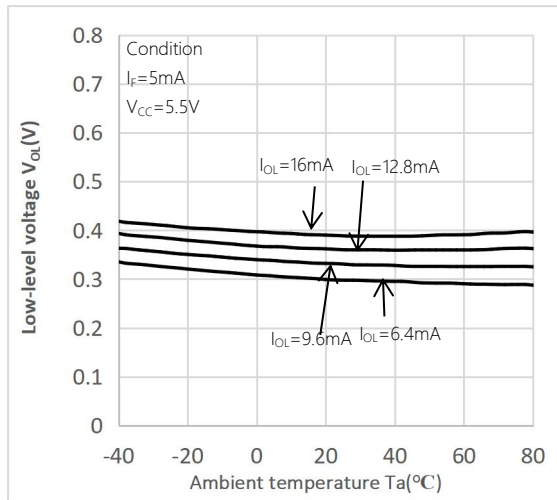


Fig.2 Forward current voltage vs. Forward voltage

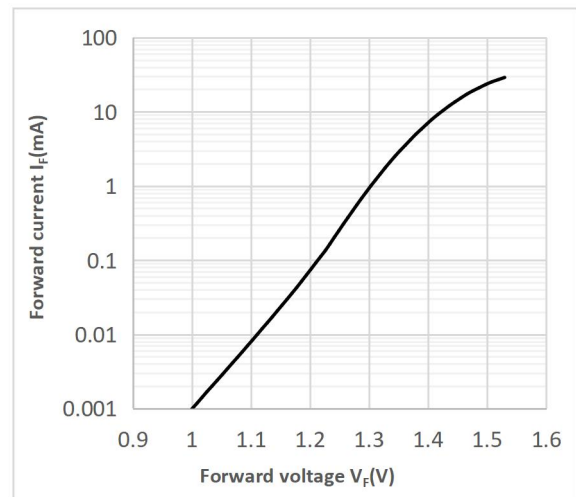


Fig.3 Switch time vs. Forward current

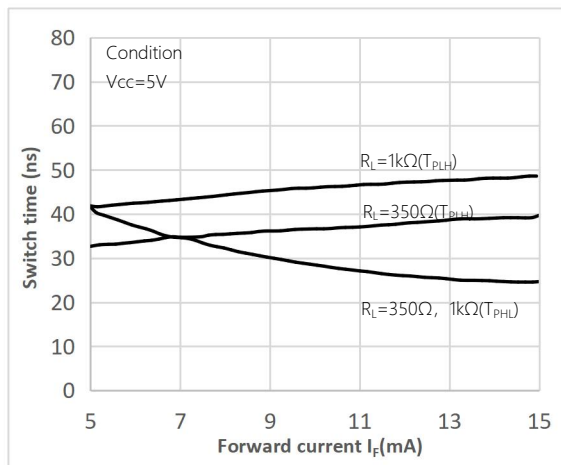


Fig.4 Low-level output current vs. Ambient temperature

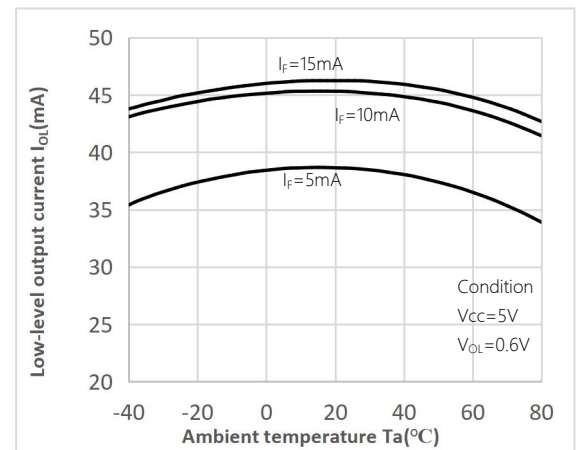


Fig.5 Starting current vs. Ambient temperature


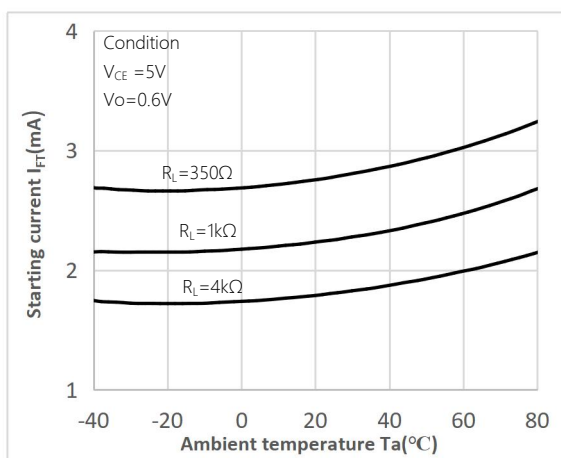


Fig.6 Output voltage vs. Input Forward current

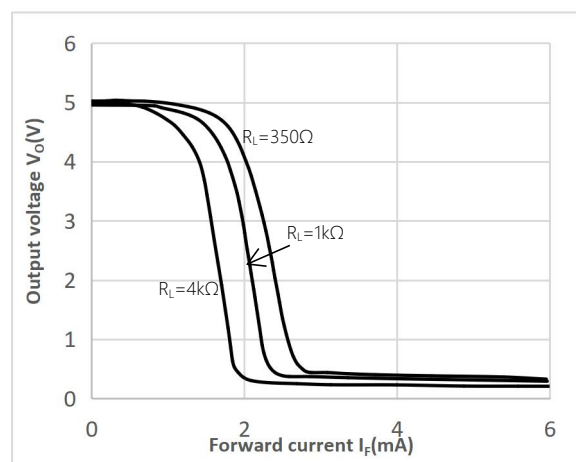

Beijing Hongli Kunpeng International Trade Co., Ltd.

Tel: 86-10-57891098 MP:86-13001179378 Mail: info@hlkpint.com or lucyliu0807@163.com

Fig.7 Pulse-width distortion vs. Ambient temperature



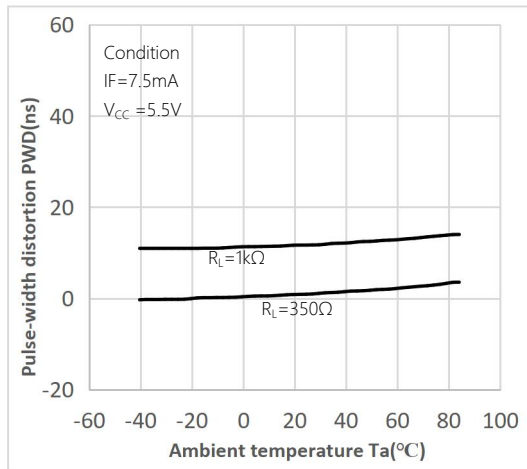




Fig.8 Switch time vs. Ambient temperature

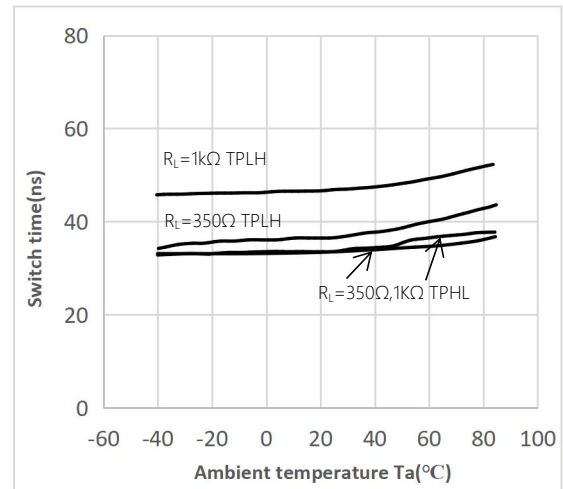

开关时间测试电路 Witch Time Test Circuit

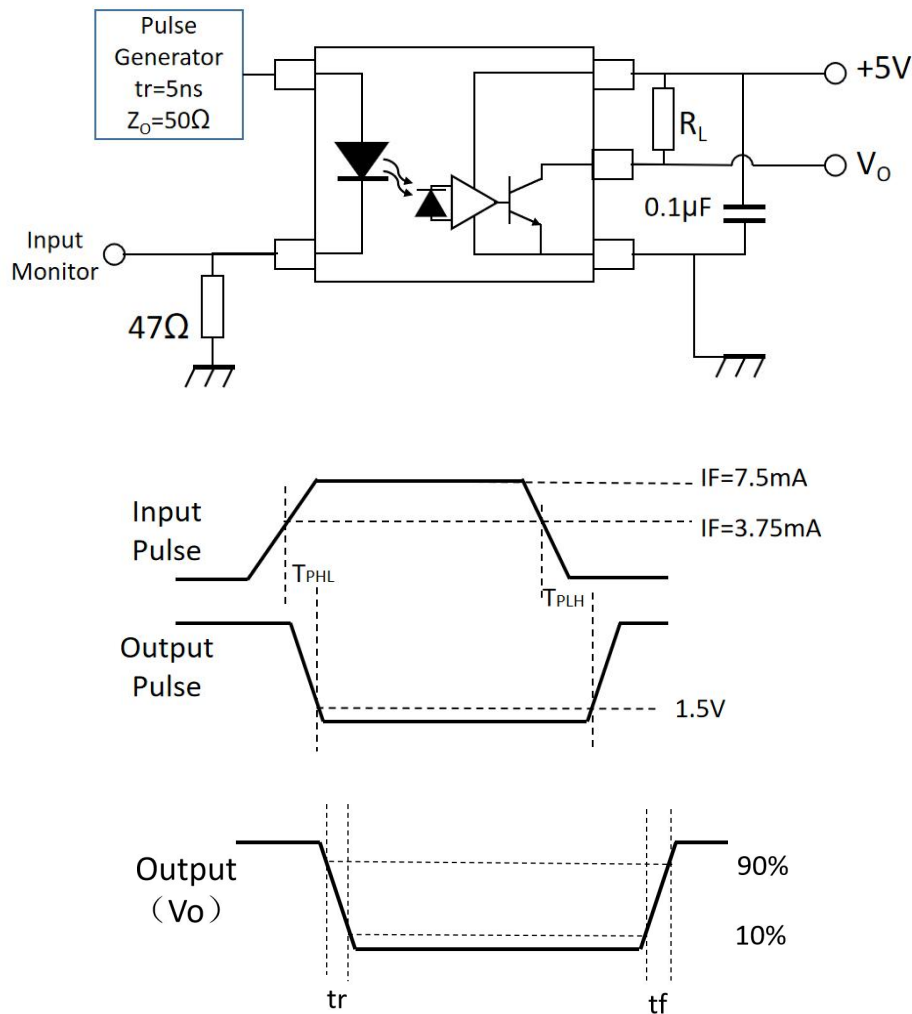

CMR 测试电路 Test Circuit for Common Mode Transient Immunity

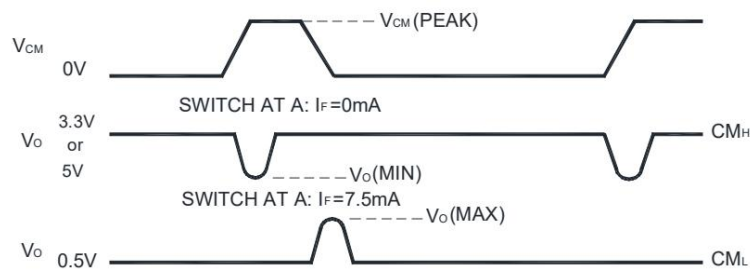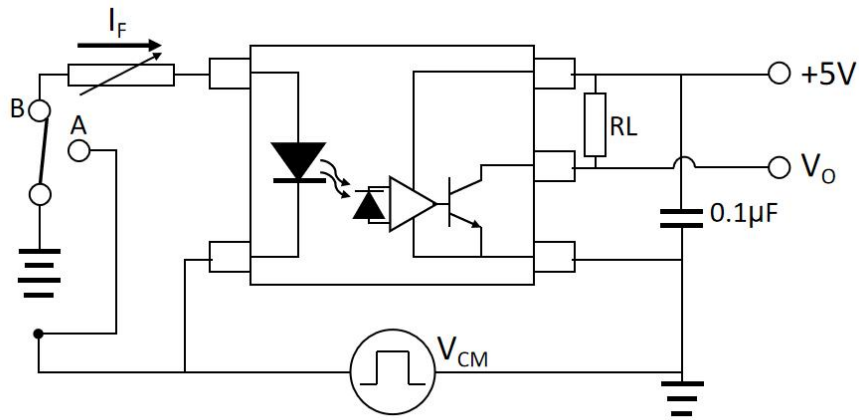


高速光耦

HLM600 HLM601 HLM611

High Speed Photo Coupler High Speed 10MBit/s Logic Gate


外形尺寸 Outline Dimensions

SOP5

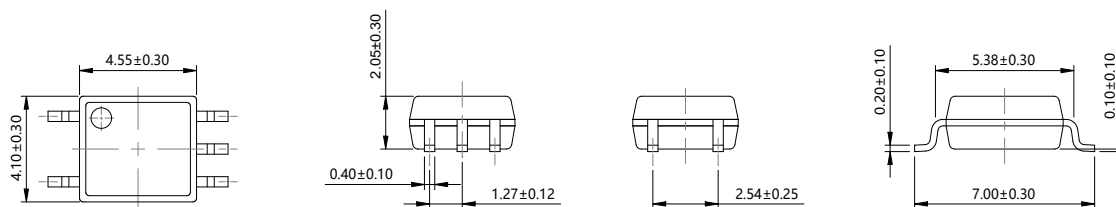

单位 Unit: mm

建议焊盘布局 Recommended Pad Layout

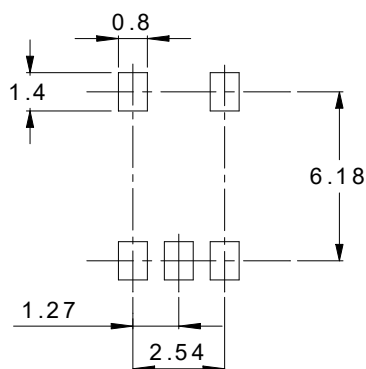

单位 Unit: mm


注：上图产品正视图。

Note: The picture above is the front view of the product.

Beijing Hongli Kunpeng International Trade Co., Ltd.

Tel: 86-10-57891098 MP: 86-13001179378 Mail: info@hlkpint.com or lucyliu0807@163.com

回流焊温度曲线图 Solder Reflow Profile

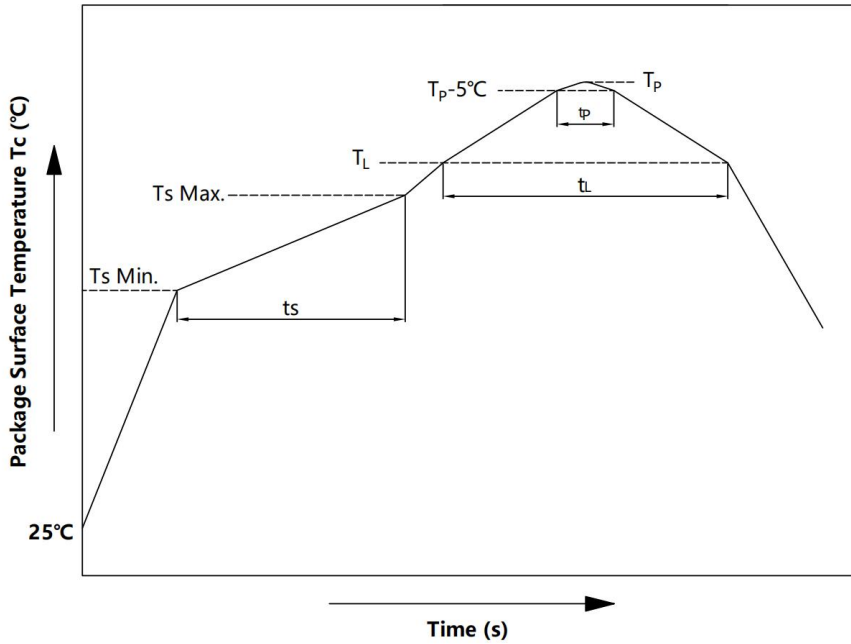


项目 Item	符号 Symbol	最小值 Min.	最大值 Max.	单位 Unit
预热温度 Preheat Temperature	T_s	150	200	$^\circ\text{C}$
预热时间 Preheat Time	t_s	60	120	s
升温速率 Ramp-Up Rate (T_L to T_P)	-	-	3	$^\circ\text{C/s}$
液相线温度 Liquidus Temperature	T_L	217		$^\circ\text{C}$
时间高于 T_L Time Above T_L	t_L	60	150	s
峰值温度 Peak Temperature	T_P	-	260	$^\circ\text{C}$
T_c 在 (T_P-5) 和 T_P 之间的时间 Time During Which T_c Is Between (T_P-5) and T_P	t_p	-	30	s
降温速率 Ramp-down Rate(T_P to T_L)	-	-	6	$^\circ\text{C/s}$

注 Note:

建议在所示的温度和时间条件下进行回流焊，最多不能超过三次；

Reflow soldering is recommended at the temperatures and times shown, no more than three times;

波峰焊温度曲线图 Wave Soldering Profile

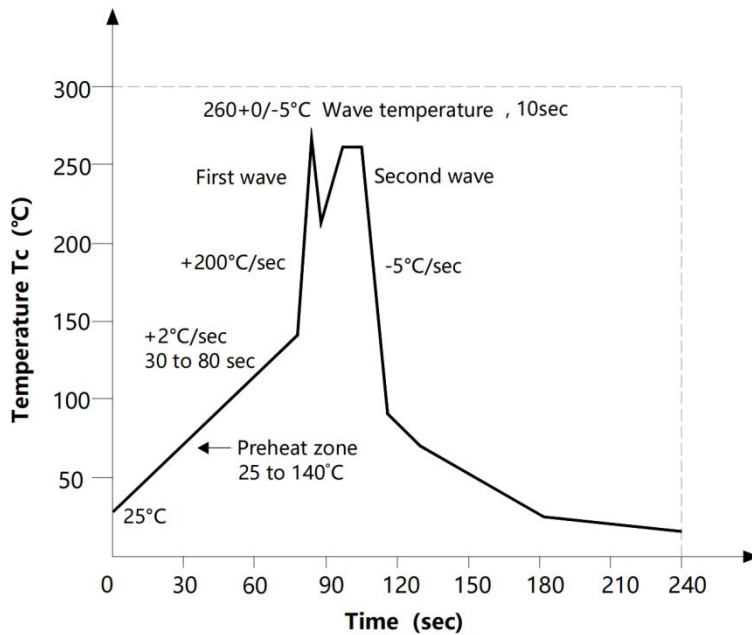

手工烙铁焊接 Soldering with hand soldering iron

A. 手工烙铁焊仅用于产品返修或样品测试;

Hand soldering iron is only used for product rework or sample testing;

B. 手工烙铁焊要求: 温度 $360^{\circ}\text{C} \pm 5^{\circ}\text{C}$, 时间 $\leq 3\text{s}$ 。

Hand soldering iron requirements: Temperature: $360^{\circ}\text{C} \pm 5^{\circ}\text{C}$, within 3s.

高速光耦

HLM600 HLM601 HLM611

High Speed Photo Coupler High Speed 10MBit/s Logic Gate


包装 Packing

■ 汇总表 Summary table

封装形式	包装方式	盘数量	盒数量	箱数量	静电袋规格	盒规格	箱(双瓦楞)规格	备注
SOP5	编带 ($\phi 330\text{mm}$ 蓝)	3k /盘	2 盘/盒	10 盒/箱	450*390*0.1mm	340*60*340mm	620*360*365mm	保护带 200mm (min)
Package Type	Packing Form	Quantity per Reel	Quantity per Box	Quantity per Carton	Antistatic Bag Specification	Box Specification	Carton Specification	Note
SOP5	Reel($\phi 330\text{mm}$ Blue)	3k pcs/reel	2 reels /box	10 boxes /ctn	450*390*0.1mm	340*60*340mm	620*360*365mm	Guard band 200mm min.

■ 编带包装 Tape & Reel

- 1) 每卷数量：3000 只。
Qty/reel: 3000 pcs.
- 2) 每箱数量：60000 只。
Qty/ctn: 60000 pcs.
- 3) 内包装：每盒 2 盘。
Inner packing: 2 reels/box.
- 4) 示意图 Schematic:

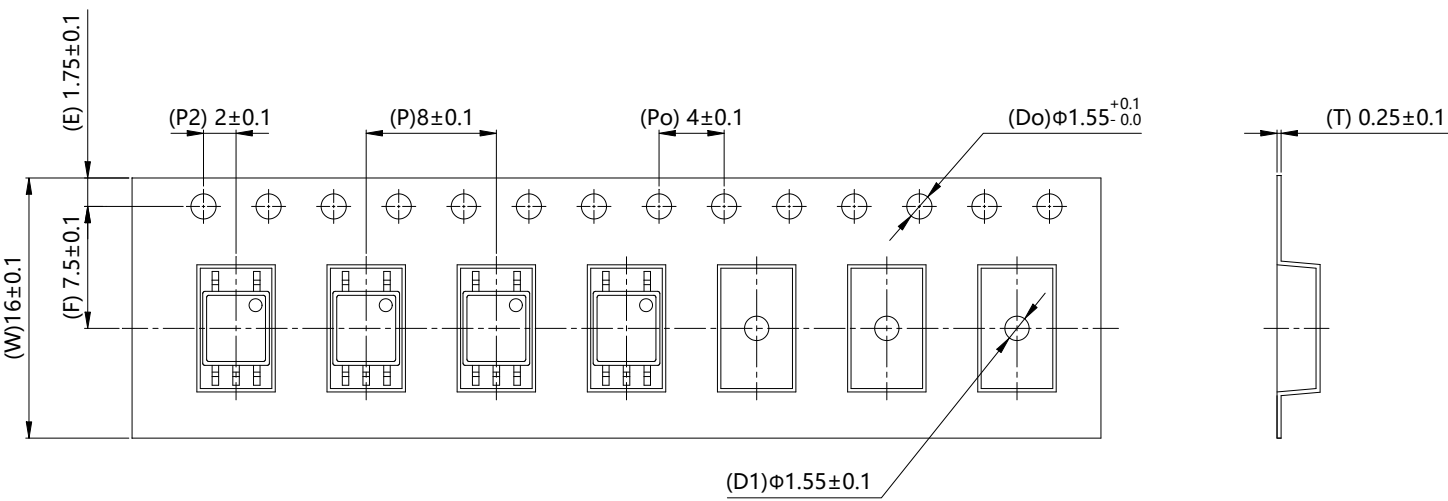

单位 Unit: mm

注意 Attention

- 鸿利鲲鹏持续不断改进质量、可靠性、功能或设计，保留此文件更改的权利恕不另行通知。
HLKP continuously improve quality, reliability, function and design. We reserve the right to change this document without prior notice.
- 请遵守产品规格书使用，鸿利鲲鹏不对使用时不符合产品规格书条件而导致的质量问题负责。
Please use in accordance with the product specification. HLKP is not responsible for the quality problems caused by non-compliance with the product specifications.
- 对于需要高可靠性或安全性的设备/装置需求，请联系我们的销售人员。
For equipment/devices requiring high reliability or safety, please contact our sales representatives.
- 当需要用于任何“特定”应用时，请咨询我们的销售人员。
When requiring a device for any “specific” application, please contact our sales in advice.
- 如对文件中表述的内容有疑问，欢迎联系我们。
If you have any questions about the contents of the document, please contact us.