


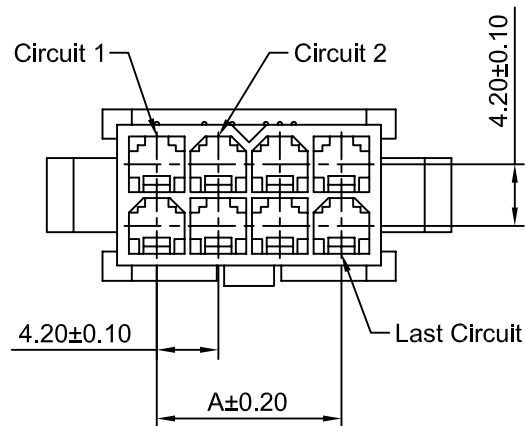

Ordering Information:

C4201HM-2xXP - $\frac{**}{2}$ - $\frac{**}{3}$

1.Part No.

2.Material:

(blank):Nylon 66 UL94V-2

V0:Nylon 66 UL94V-0

GWT:Nylon 66 UL94V-0,GWT 750°C

3.Color:

(blank):Natural


WH:White

BK:Black

RD:Red

YL:Yellow

BL:Blue

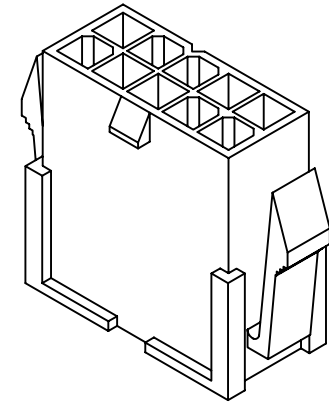

SPECIFICATIONS:

Current Rating: 9A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute



Material: Nylon 66,UL94V-2(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x1P	---	5.40	2x7P	25.20	30.60
2x2P	4.20	9.60	2x8P	29.40	34.80
2x3P	8.40	13.80	2x9P	33.60	39.00
2x4P	12.60	18.00	2x10P	37.80	43.20
2x5P	16.80	22.20	2x11P	42.00	47.40
2x6P	21.00	26.40	2x12P	46.20	51.60

Beijing Hongli Kunpeng International Trade Co.,Ltd.

Unit		Scale		Sheet		Title : 4.20mm PITCH			
mm		2:1		1 of 1					
Draw BY:		Approved :		DUAL ROW HOUSING					
LIZQ		GONGYB							
9	General Tolerance					DRAW NO : HLB-01-HM-2xXP 123		REV A2	
5	x.xx±0.25		ANGLE±						
0	x.xx±0.20								
	x.xxx±0.15								

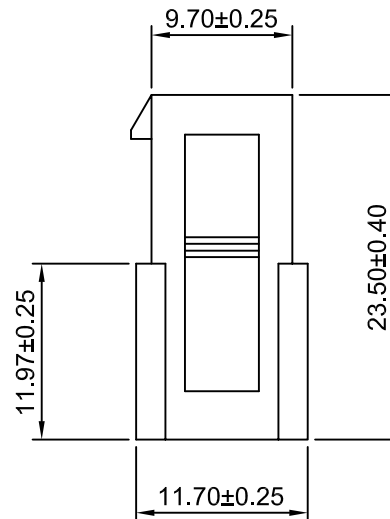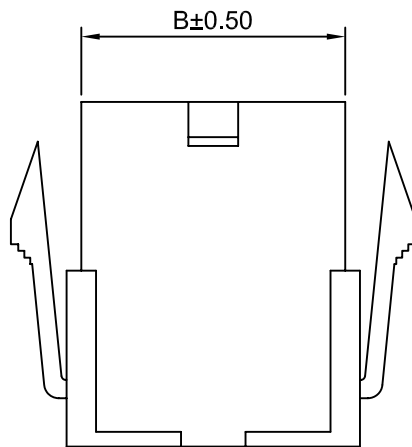

A2	Modify the size	2015.05.09
A1	Change tolerance	2014.07.25
A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE