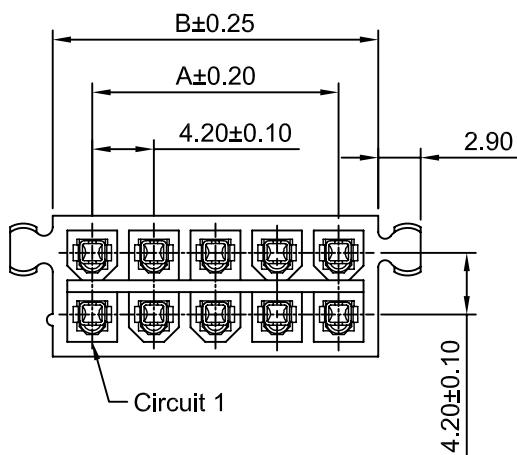
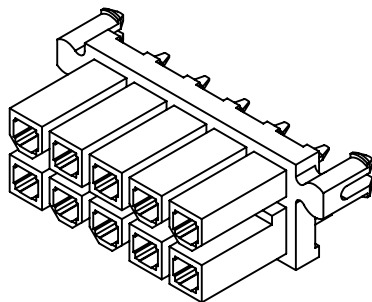


Ordering Information:

C4201HV-2xXP - ** - ** - **
1 2 3 4

1.Part No.

2.Material:

(blank):Nylon 66 UL94V-2

V0:Nylon 66 UL94V-0

GWT:Nylon 66 UL94V-0,GWT 750°C

3.Color:

(blank):Natural

WH:White

BK:Black

RD:Red

YL:Yellow

BL:Blue

4.Finish:


(blank):Tin over Nickel

G:Gold over Nickel(1u")

G3:Gold over Nickel(3u")

G15:Gold over Nickel(15u")

G30:Gold over Nickel(30u")

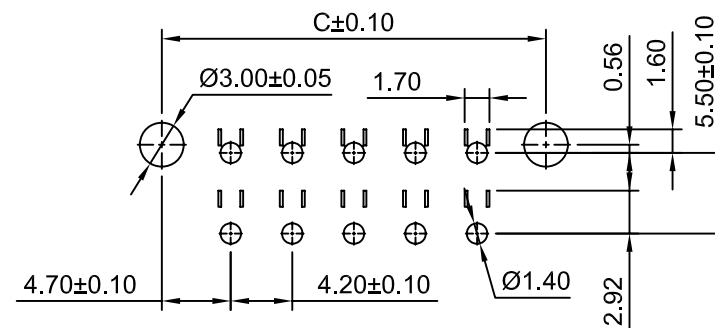

PCB LAYOUT:Component Side
Recommended PCB Thickness 1.78MAX

SPECIFICATIONS:

Current Rating: 9A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Phosphor Bronze/Tin over Nickel

Material: Nylon 66,UL94V-2(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2x1P	---	5.40	9.40	2x8P	29.40	34.80	38.80
2x2P	4.20	9.60	13.60	2x9P	33.60	39.00	43.00
2x3P	8.40	13.80	17.80	2x10P	37.80	43.20	47.20
2x4P	12.60	18.00	22.00	2x11P	42.00	47.40	51.40
2x5P	16.80	22.20	26.20	2x12P	46.20	51.60	55.60
2x6P	21.00	26.40	30.40	2x18P	71.40	76.80	80.80
2x7P	25.20	30.60	34.60				

Beijing Hongli Kunpeng International Trade Co.,Ltd.

Unit	Scale	Sheet
mm	2:1	1 of 1
Draw BY:		Approved :
LIZQ		GONGYB

Title :

4.20mm PITCH
Vertical Dual Row
Receptacle Header

General Tolerance

			x.xx±0.25	ANGLE±
A0	NEW RELEASE	2005.05.10	x.xx±0.20	
REV	DESCRIPTION	DATE	x.xxx±0.15	

DRAW NO :

HLB-01-HV-2xXP 121

REV
A0