


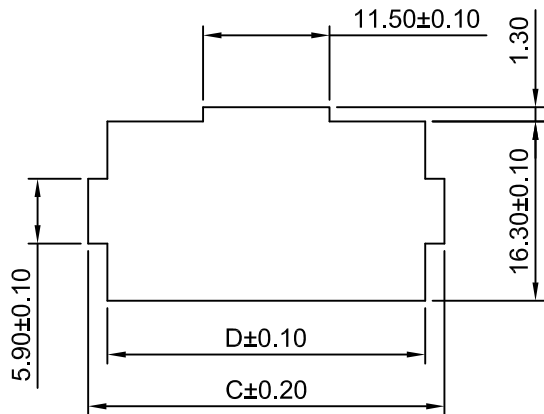
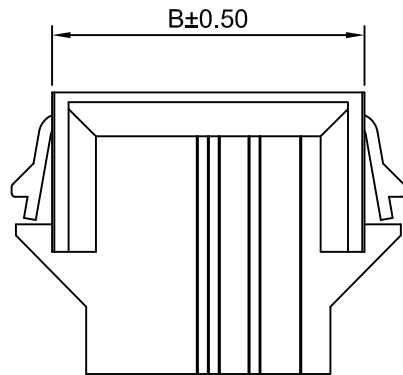
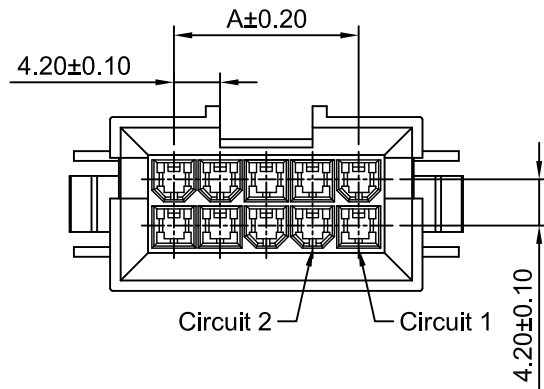




RECOMMENDED PCB CUTOUT
PANET THICKNESS 1.60

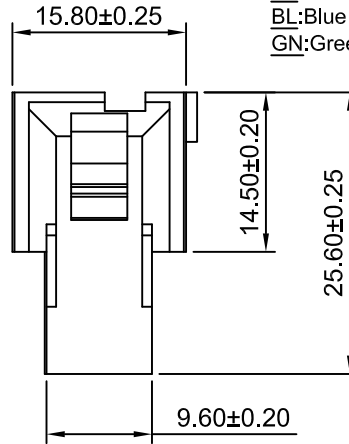

2x2P



2x2P-A

Ordering Information:

C4201HMB-2xXP - $\frac{*}{1}$ - $\frac{***}{2}$ - $\frac{***}{3}$ - $\frac{***}{4}$

1.Part No.

2.Style:

(Blank): Type 1

A: Type 2

3.Material:

(Blank):Nylon 66 UL94V-2

V0:Nylon 66 UL94V-0

GWT:Nylon 66 UL94V-0,GWT 750°C

4.Color:

(Blank):Natural


BK:Black

RD:Red

YL:Yellow

BL:Blue

GN:Green



SPECIFICATIONS:

Current Rating: 9A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2(Natural)




Ordering Information & Dimensions

Circuits	Dimensions(mm)			
	A	B	C	D
2x2P	4.20	15.80	19.80	16.30
2x3P	8.40	20.00	24.00	20.50
2x4P	12.60	24.20	28.20	24.70
2x5P	16.80	28.40	32.40	28.90
2x6P	21.00	32.60	36.60	33.10
2x7P	25.20	36.80	40.80	37.30
2x8P	29.40	41.00	45.00	41.50
2x9P	33.60	45.20	49.20	45.70
2x10P	37.80	49.40	53.40	49.90
2x11P	42.00	53.60	57.60	54.10
2x12P	46.20	57.80	61.80	58.30
2x18P	71.40	83.00	87.00	83.50

Beijing Hongli Kunpeng International Trade Co.,Ltd.

Unit	Scale	Sheet	TITLE	
mm	1:5:1	1 of 1		
DRWN	CHK'D	APPR	4.20mm Pitch Dual Row Housing With Panel Mount Ears	
Wenmin Luo	Diankui Wan	Jack Yin		
General Tolerances			THIRD ANGLE PROJECTION	DRAWING NO.
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				HLB-01-HMB-2xXP 120
				REV A2

A2	CHANGE THE DRAWING	2021.02.20
A1	CHANGE THE INFORMATION	2019.12.14
A0	NEW RELEASE	2012.11.15
REV	DESCRIPTION	DATE

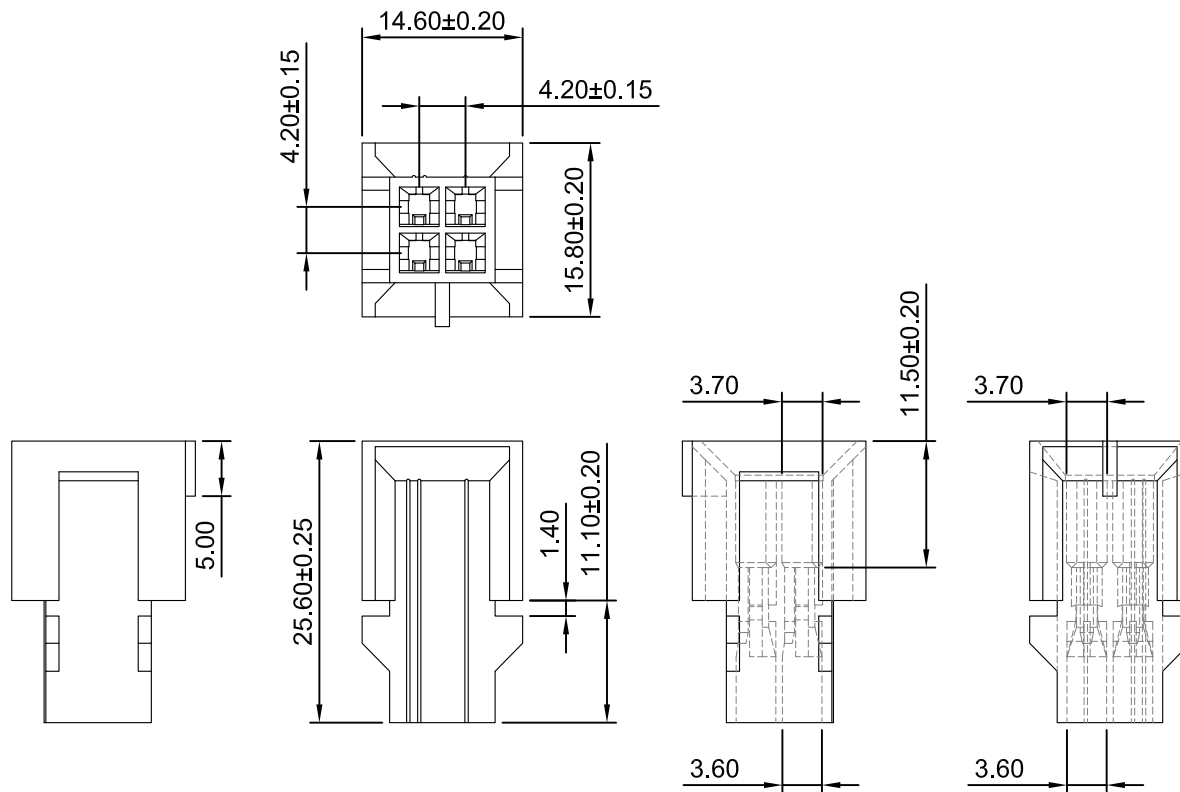

Ordering Information:

C4201HMB-2x2P-B - * _ ***
1 2 3

1.Part No.

2.Material:

(Blank):Nylon 66 UL94V-2

V0:Nylon 66 UL94V-0

GWT:Nylon 66 UL94V-0, IEC 60335-1,5th
Edition Glow Wire Capable.

3.Color:

(Blank):Natural

BK:Black

RD:Red

YL:Yellow

BL:Blue

GN:Green

SPECIFICATIONS:

Current Rating: 9A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2(Natural)

Beijing Hongli Kunpeng International Trade Co.,Ltd.

Unit	Scale	Sheet	TITLE 4.20mm Pitch Dual Row Housing With Panel Mount Ears	
mm	1.5:1	1 of 1		
DRWN	CHK'D	APPR		
Wenmin Luo	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. HLB-01-HMB-2xXP 120	REV A0
x,xx±0.25				
x,xxx±0.20				
x,xxxx±0.15				
ANGLES ±1°				

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2021.03.27