
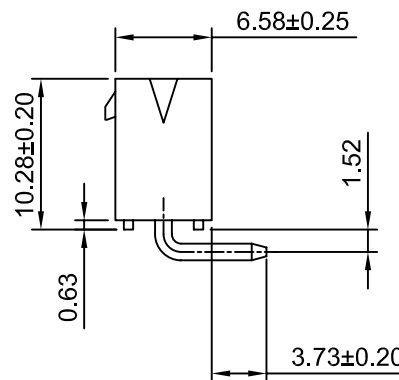
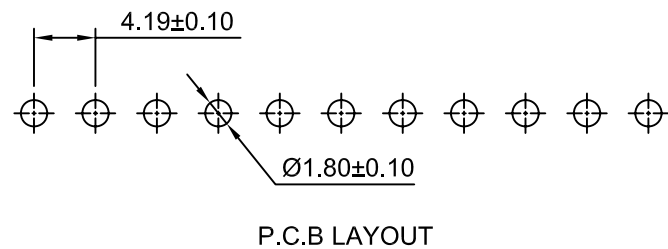
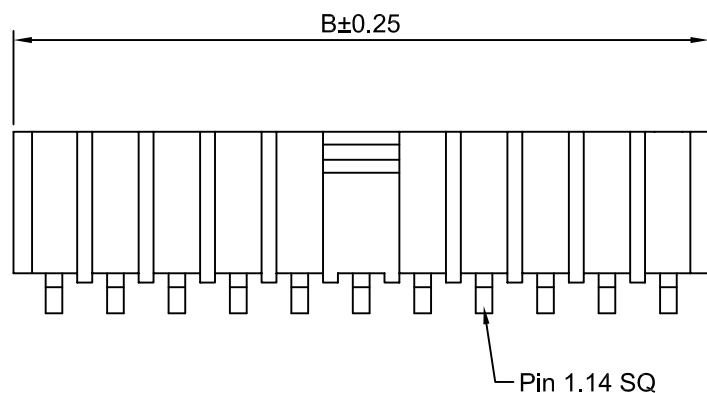


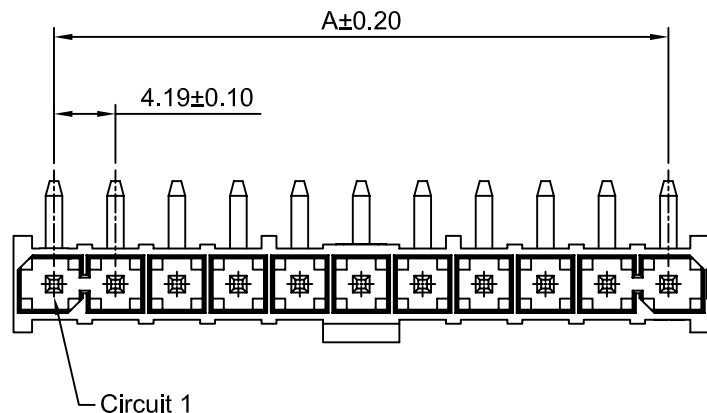

SPECIFICATIONS:

Current Rating: 9A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact Resistance: $10\text{m}\Omega$ Max
After environmental testing: $20\text{m}\Omega$ Max
Insulation Resistance: $1000\text{M}\Omega$ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin over Nickel
Material: LCP , UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	4.19	9.40	9P	33.52	38.73
3P	8.38	13.59	10P	37.71	42.92
4P	12.57	17.78	11P	41.90	47.11
5P	16.76	21.97	12P	46.09	51.30
6P	20.95	26.16	13P	50.28	55.49
7P	25.14	30.35	14P	54.47	59.68
8P	29.33	34.54	15P	58.66	63.87

Beijing Hongli Kunpeng International Trade Co.,Ltd.

Unit	Scale	Sheet	Title :	
mm	2:1	1 of 1		
Draw BY:		Approved :	4.19mm PITCH SINGLE ROW WAFER	
Jack Yin		GONGYB		
General Tolerance				
x.x≤0.25 x.xx≤0.20 x.xxs0.15		ANGLE± 	DRAW NO : HLB-01-WRS-XP 113	
			REV A1	

A0	NEW RELEASE	2015.03.11
REV	DESCRIPTION	DATE