




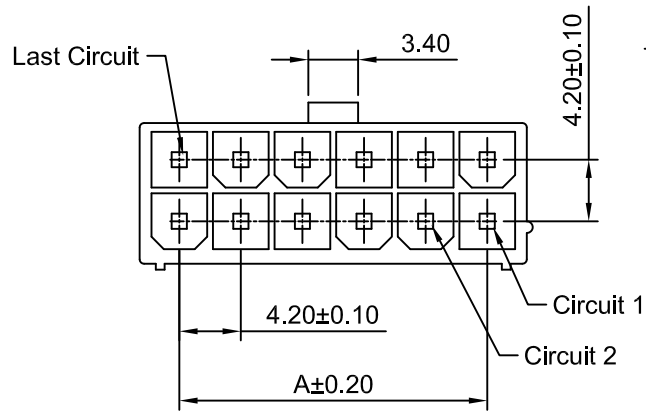



2x2P~2x12P

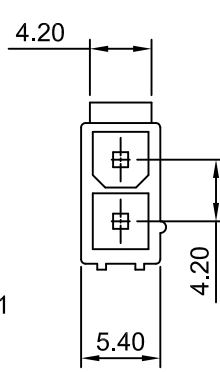

2x1P

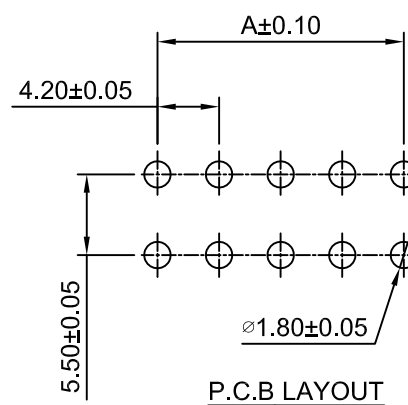

P.C.B LAYOUT

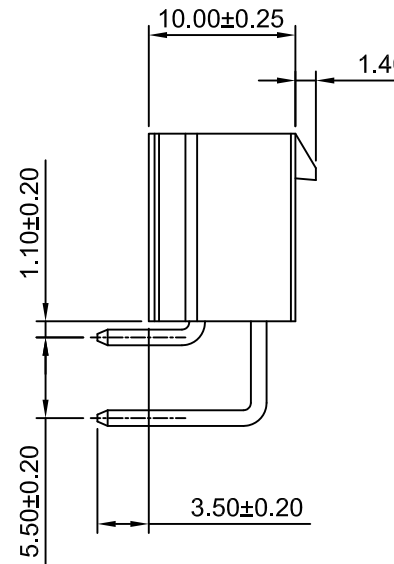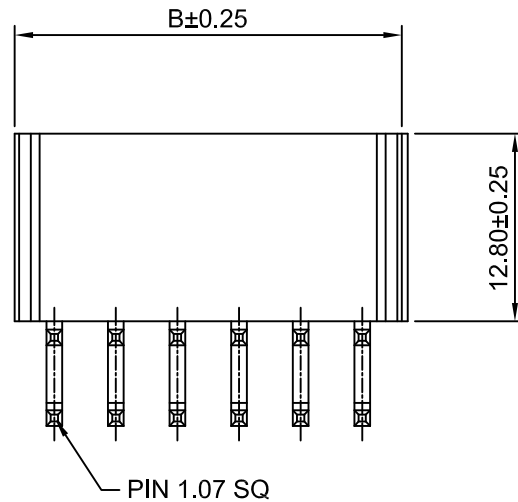

Ordering Information:

C4201WRG-2xXP - $\frac{**}{2}$ - $\frac{***}{3}$

1.Part No.

2.Material:

(blank):LCP,UL94V-0(Black)

6T:Nylon 6T,UL94V-0(Ivory)

9T:Nylon 9T,UL94V-0(Ivory)

3.Finish:

(blank):Tin over Nickel

G:Gold over Nickel

G30:Gold over Nickel(Au=30u")

SPECIFICATIONS:

Current Rating: 13A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin over Nickel

Material: LCP,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x1P	---	5.40	2x7P	25.20	30.60
2x2P	4.20	9.60	2x8P	29.40	34.80
2x3P	8.40	13.80	2x9P	33.60	39.00
2x4P	12.60	18.00	2x10P	37.80	43.20
2x5P	16.80	22.20	2x11P	42.00	47.40
2x6P	21.00	26.40	2x12P	46.20	51.60

Beijing Hongli Kunpeng International Trade Co.,Ltd.

Unit		Scale		Sheet		Title : 4.20mm Pitch 90° Dual Row Wafer			
mm		2:1		1 of 1					
Draw By:		Approved :							
Dlankul Wan		Jack Yin							
General Tolerance						DRAW NO : HLB-01-WRG-2xXP 110		REV A1	
x,xx±0.25		PROJECT 							
x.xx±0.20									
x.xxx±0.15									