

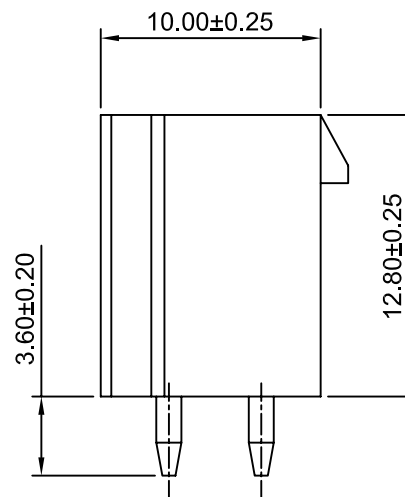
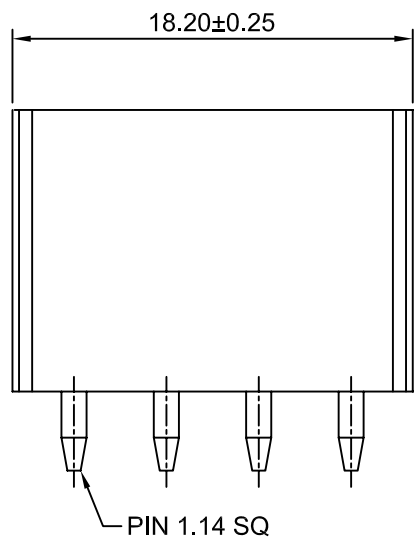
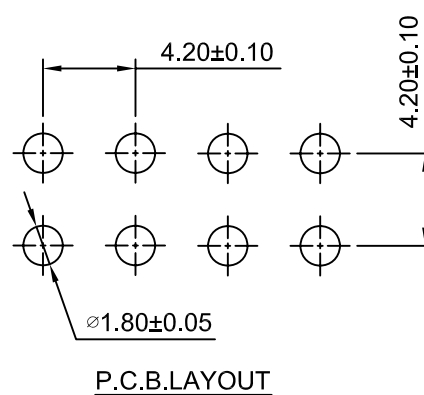


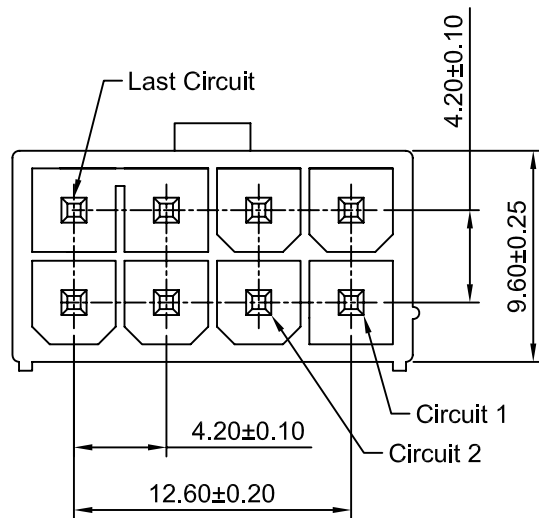

Ordering Information:
C4201WV-2x4P-A - *** - ***
1 2 3

- Part No.
- Material:
(blank);Nylon 66,UL94V-2
V0:Nylon 66,UL94V-0
GWT:Nylon 66,UL94V-0,GWT 750°C
- Color:
(blank);Black
NAT:Natural
WH:White
RD:Red
YL:Yellow
BL:Blue

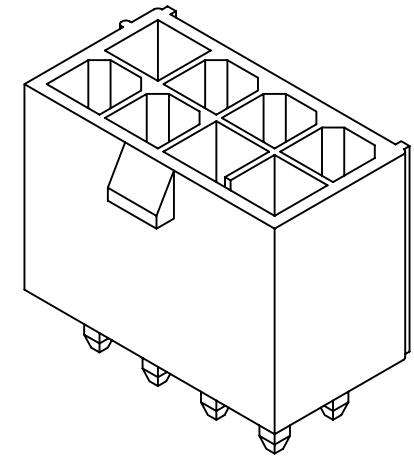

SPECIFICATIONS:
Current Rating: 9A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 66,UL94V-2(Black)

Beijing Hongli Kunpeng International Trade Co.,Ltd.

Unit	Scale	Sheet	Title : 4.20mm PITCH 180° DUAL ROW WAFER - SPECIAL TYPE	
mm	3:1	1 of 1		
Draw BY:		Approved :		
Tony Su		Jack Yin	DRAW NO : HLB-01-WV-2x4P-A 109	
General Tolerance				
x.x≤0.25 x.xx≤0.20 x.xxx≤0.15		ANGLE± 		
			REV A0	

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2012.11.14