

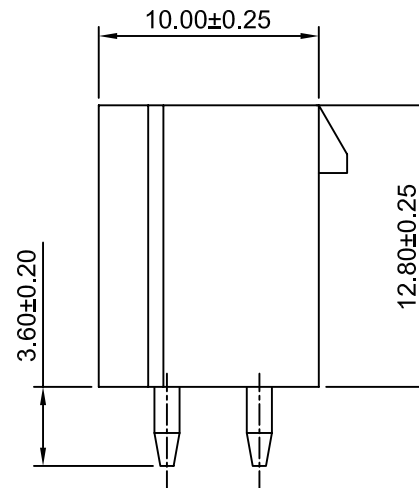
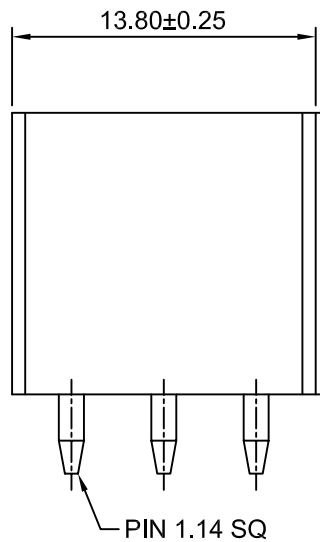
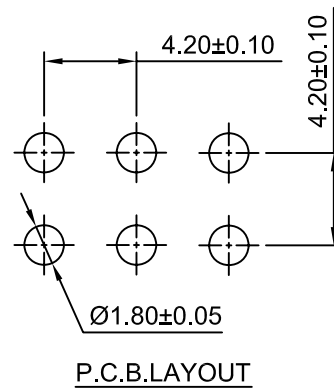


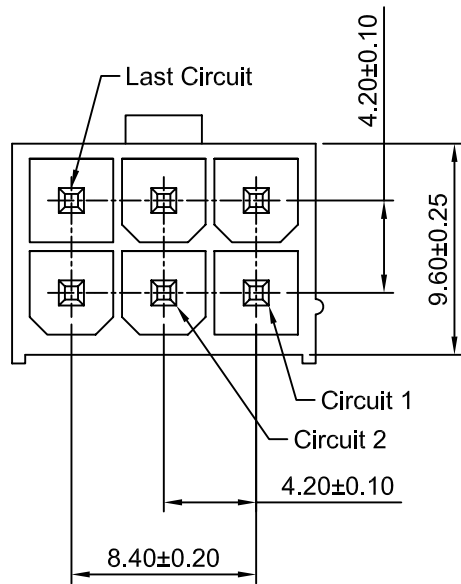

Ordering Information:
C4201WV-2x3P-B - ^{**}/₂ - ^{**}/₃

- 1.Part No.
- 2.Material:
(blank):UL94V-2
V0:UL94V-0
- 3.Color:
NAT:Natural
WH:White
BK:Black
RD:Red
YL:Yellow
BL:Blue

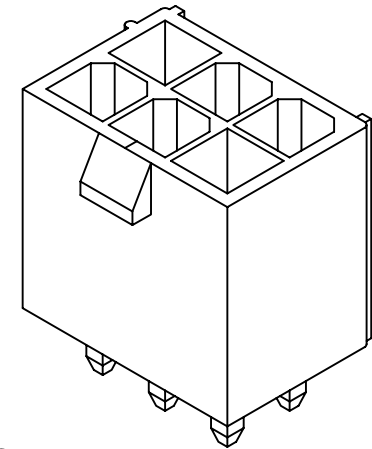

SPECIFICATIONS:
Current Rating: 9A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 66,UL94V-2(Black)

Beijing Hongli Kunpeng International Trade Co.,Ltd.

Unit	Scale	Sheet
mm	3:1	1 of 1
Draw BY:		Approved :
Yinzhipeng		GONGYB

Title :
4.20mm PITCH
180° DUAL ROW WAFE

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2012.11.14

General Tolerance	
x.xx±0.25	ANGLE±
x.xx±0.20	
x.xxx±0.15	

DRAW NO :
HLB-01-WV-2x3P-B 107

REV
A0