

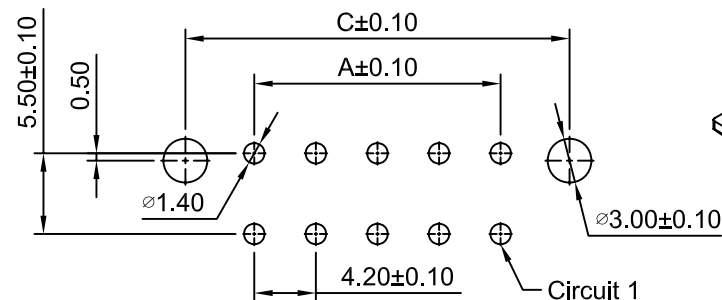
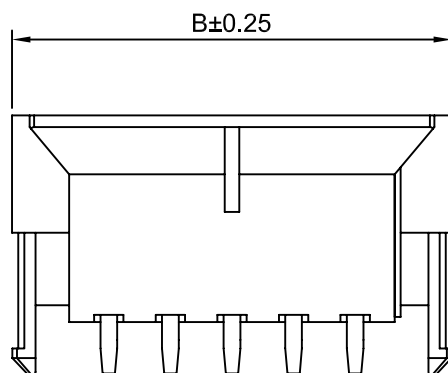


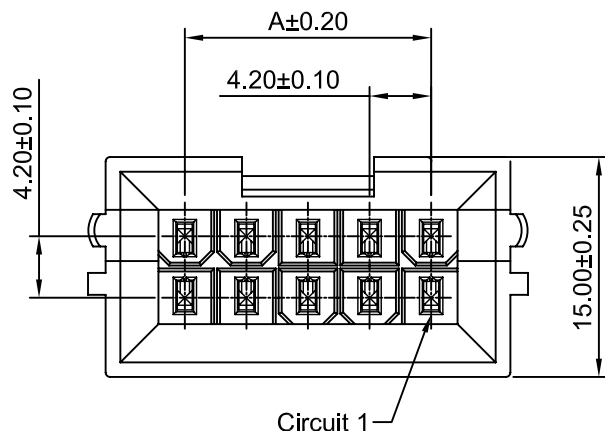

PCB LAYOUT: Component Side
Recommended PCB Thickness 1.78MAX

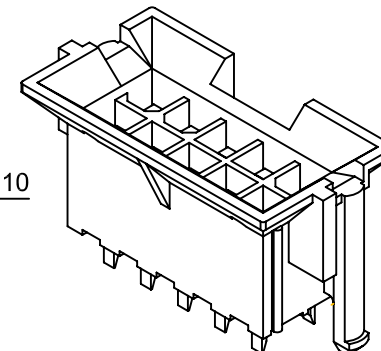

Ordering Information:
C4201WVD-F1-2xXP - *** - ** - ***
1 2 3 4


- 1.Part No.
- 2.Material:
(blank):Nylon 66 UL94V-2
V0:Nylon 66 UL94V-0
GWT:Nylon 66 UL94V-0,GWT 750°C
- 3.Color:
(blank):Natural
WH:White
BK:Black
RD:Red
YL:Yellow
BL:Blue
- 4.Finish:
(blank):Tin over Nickel
G:Gold over Nickel(1u")
G3:Gold over Nickel(3u")
G15:Gold over Nickel(15u")
G30:Gold over Nickel(30u")

SPECIFICATIONS:

Current Rating: 11A AC,DC(Max)(Maximum current up to 11A when using the C4201F-TCA-HH series terminal)
Voltage Rating: 600V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 66,UL94V-2(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2x1P	-----	13.20	9.40	2x8P	29.40	42.60	38.80
2x2P	4.20	17.40	13.60	2x9P	33.60	46.80	43.00
2x3P	8.40	21.60	17.80	2x10P	37.80	51.00	47.20
2x4P	12.60	25.80	22.00	2x11P	42.00	55.20	51.40
2x5P	16.80	30.00	26.20	2x12P	46.20	59.40	55.60
2x6P	21.00	34.20	30.40	2x18P	71.40	84.60	80.80
2x7P	25.20	38.40	34.60				

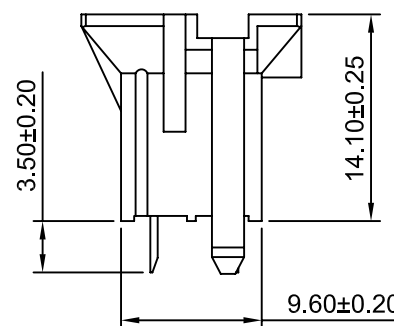

Beijing Hongli Kunpeng International Trade Co.,Ltd.

Unit	Scale	Sheet
mm	2:1	1 of 1
Draw BY:		Approved :
Tony Su		Jack Yin

Title : 4.20mm PITCH
180° Dual Row Wafer
With Foot
Without Drain Holes

General Tolerance	
A1	CHANGE THE DRAWING
A0	NEW RELEASE
REV	DESCRIPTION

DRAW NO : HLB-01-WVD-F1-2xXP 94
REV A1