
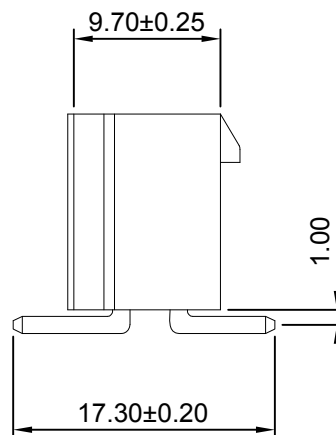
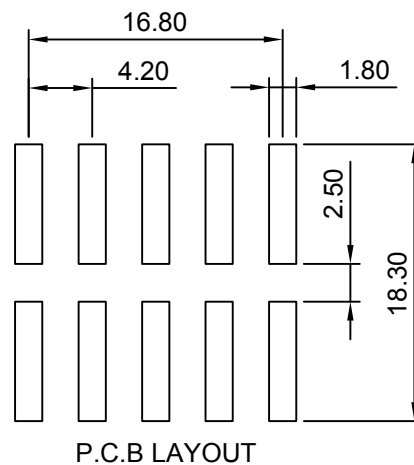
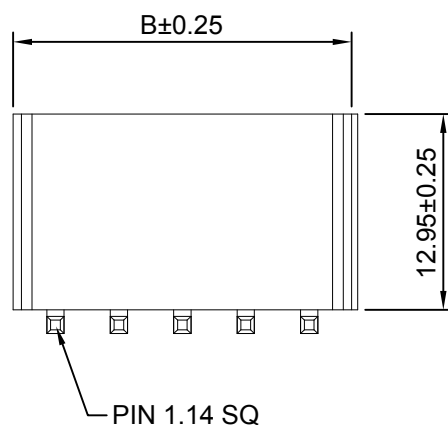


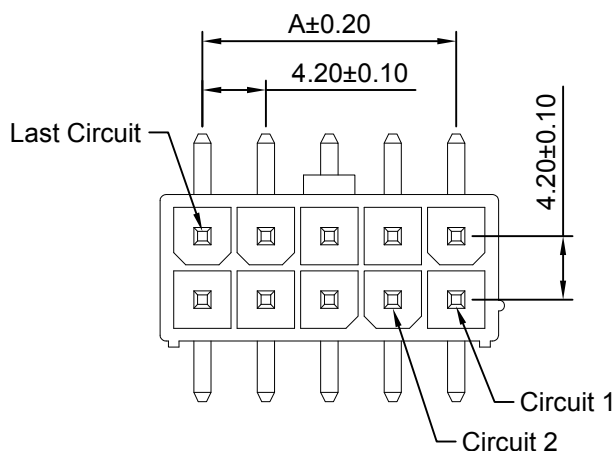

Ordering Information:
 C4201WV-S-2xXP - $\frac{***}{1}$ - $\frac{***}{2}$ - $\frac{***}{3}$

- 1.Part No.
- 2.Material:
 (blank):Nylon 6T,UL94V-0/Natural
 LCP:LCP,UL94V-0/White
 GWT:Nylon 6T,UL94V-0,GWT 750°C
- 3.Pin Material and Finish:
 (blank):Brass/Tin over Nickel
 G:Brass/Gold over Nickel
 G15:Brass/Gold over Nickel(15u")
 G30:Brass/Gold over Nickel(30u")
 TCA:Copper Alloy/Tin over Nickel
 GCA:Copper Alloy/Gold over Nickel
 GCA-G30:Copper Alloy/Gold over Nickel(30u")

SPECIFICATIONS:

Current Rating: 13A AC,DC(Max)(Maximum current up to 13A when using the C4201F-TCA-HH series terminal)
 Voltage Rating: 600V AC,DC
 Temperature Range: -40°C ~ +105°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Pin Material:Brass/Tin over Nickel
 Material: Nylon 6T,UL94V-0(natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x1P	---	5.60	2x7P	25.20	30.80
2x2P	4.20	9.80	2x8P	29.40	35.00
2x3P	8.40	14.00	2x9P	33.60	39.20
2x4P	12.60	18.20	2x10P	37.80	43.40
2x5P	16.80	22.40	2x11P	42.00	47.60
2x6P	21.00	26.60	2x12P	46.20	51.80

Beijing Hongli Kunpeng International Trade Co.,Ltd.

Unit		Scale		Sheet		Title : 4.20mm PITCH 180° DUAL ROW WAFER - SMT TYPE			
mm		2:1		1 of 1					
Draw BY:			Approved :						
Tony Su			Jack Yin						
General Tolerance									
ANGLE±									
2		x.xs0.25 x.xx0.20 x.xxx0.15				DRAW NO : HLB-01-WV-S-2xXP 85		REV A0	