
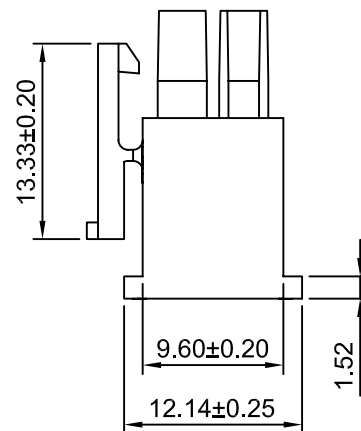
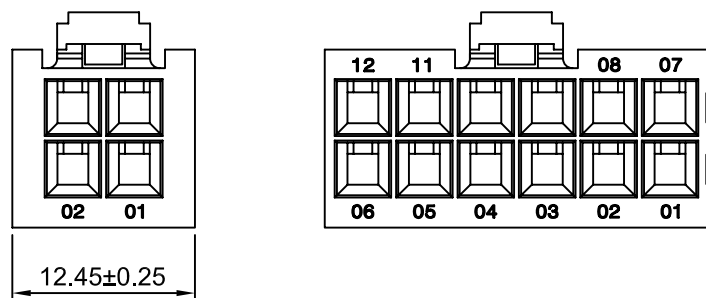
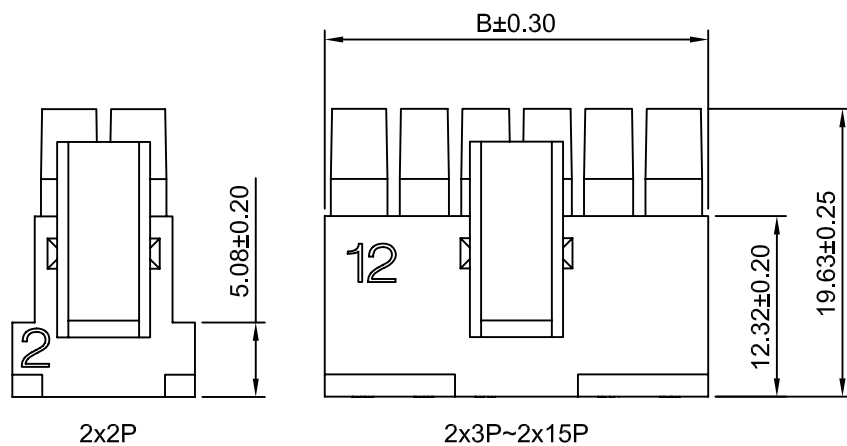


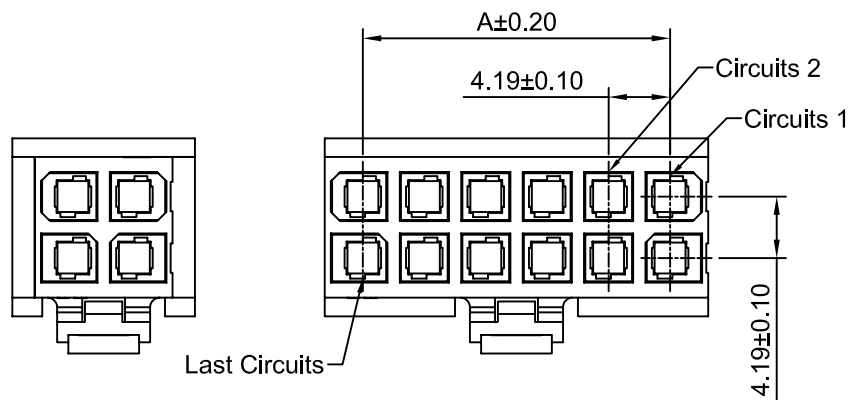

SPECIFICATIONS:

Current Rating: 9A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact Resistance: $10\text{m}\Omega$ Max
After environmental testing: $20\text{m}\Omega$ Max
Insulation Resistance: $1000\text{M}\Omega$ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66,UL94V-0(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x2P	4.19	12.45	2x9P	33.52	38.73
2x3P	8.38	13.59	2x10P	37.71	42.92
2x4P	12.57	17.78	2x11P	41.90	47.11
2x5P	16.76	21.97	2x12P	46.09	51.30
2x6P	20.95	26.16	2x13P	50.28	55.49
2x7P	25.14	30.35	2x14P	54.47	59.68
2x8P	29.33	34.54	2x15P	58.66	63.87

Beijing Hongli Kunpeng International Trade Co.,Ltd.

Unit	Scale	Sheet	Title :	
mm	2:1	1 of 1		
Draw BY:		Approved :		4.19mm PITCH
Jack Yin		GONGYB		
General Tolerance				
x.xx±0.25		ANGLE±		DUAL ROW HOUSING
x.xx±0.20				
x.xx±0.15				
DRAW NO :				REV
HLB-01-HFSB-2xXP 74				A1

A0	NEW RELEASE	2015.03.11
REV	DESCRIPTION	DATE