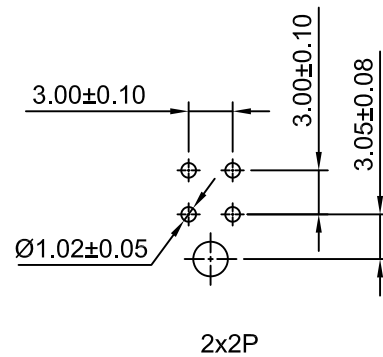
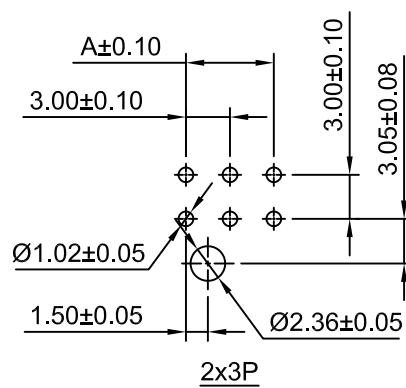
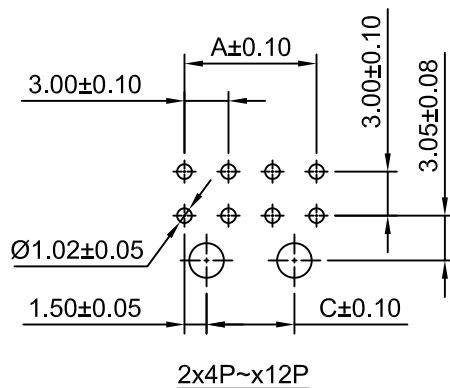


P.C.B LAYOUT

Ordering Information:

C3030HFWR-2xXP - ** - **
1 2 3

1.Part No.

2.Material:

(blank):LCP UL94V-0

GWT:LCP UL94V-0,GWT 750°C

3.Finish:

(blank):Tin over Nickel

G:Gold over Nickel(1"U)

G3:Gold over Nickel(3"U)

G15:Gold over Nickel(15"U)

G30:Gold over Nickel(30"U)

SPECIFICATIONS:

Current Rating: 12.5A AC,DC (AWG #18)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Phosphor Bronze/Tin over Nickel



Material: LCP,UL94-V0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2x2P	3.00	6.70	---	2x8P	21.00	24.70	18.00
2x3P	6.00	9.70	---	2x9P	24.00	27.70	21.00
2x4P	9.00	12.70	6.00	2x10P	27.00	30.70	24.00
2x5P	12.00	15.70	9.00	2x11P	30.00	33.70	27.00
2x6P	15.00	18.70	12.00	2x12P	33.00	36.70	30.00
2x7P	18.00	21.70	15.00				

Beijing Hongli Kunpeng International Trade Co.,Ltd.

Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 1		
DRWN	CHK'D	APPR	3.00mm PITCH RIGHT-ANGLE DUAL ROW WAFER	
Xu Lei	Diankui Wan	Jack Yin		
General Tolerances			THIRD ANGLE PROJECTION	
x.xx±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°			DRAWING NO. HLB-30-HFWR-2xXP 44	
REV			REV A2	

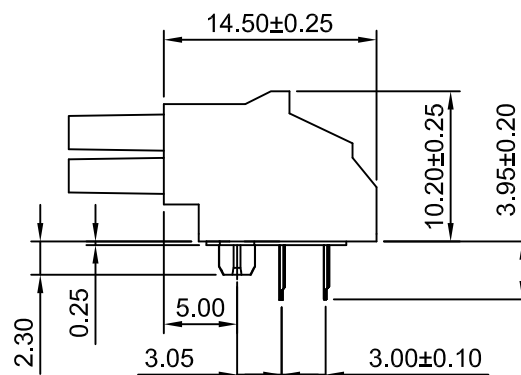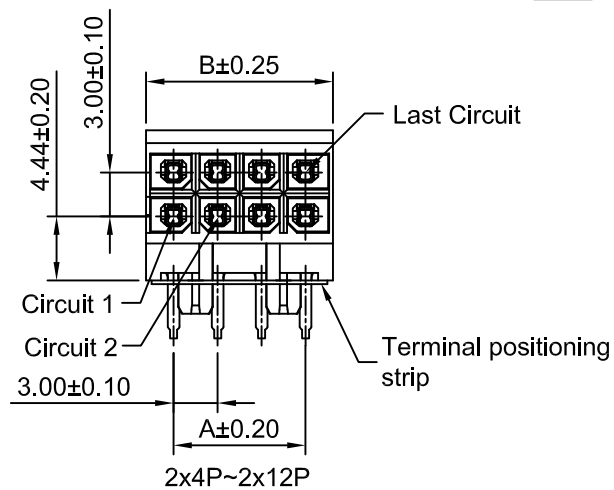

A2	CHANGE THE DRAWING	2022.01.14
A1	CHANGE THE Current Rating	2018.12.19
A0	NEW RELEASE	2013.02.27
REV	DESCRIPTION	DATE