

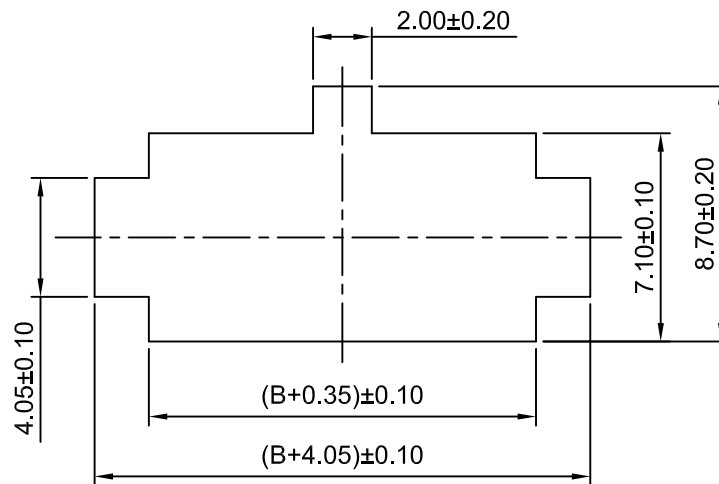
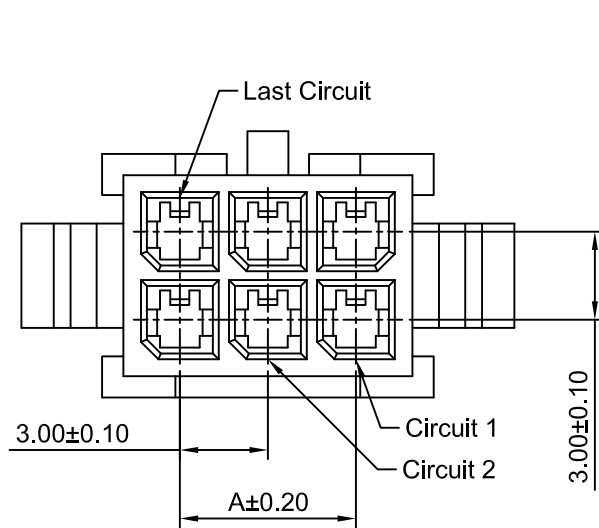
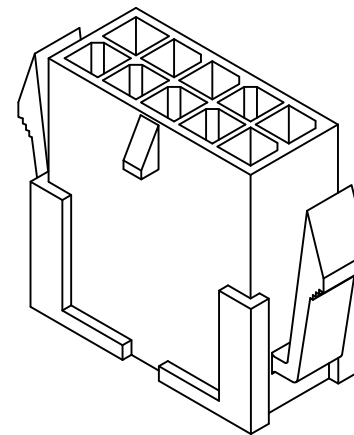


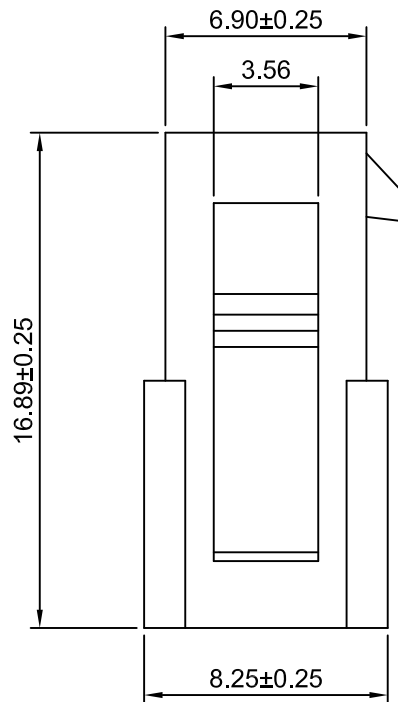

RECOMMENDED PANEL CUT-OUT
(DESIGNED FOR 1.40mm TO 2.54mm THICK
STAMPED PANEL OR PRINTED CIRCUIT BOARD)

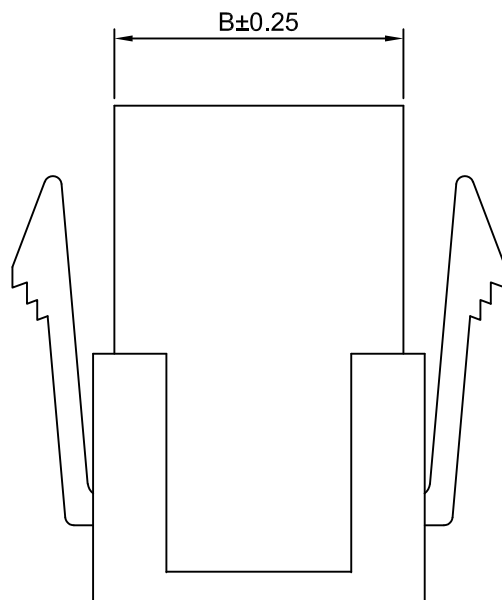

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2009.05.10
A1	CHANGE THE DRAWING	2017.11.04
A2	CHANGE THE CURRENT RATING	2018.12.14
A3	CHANGE THE DRAWING	2020.11.11
A4	UPDATED DRAWING	2021.03.09
A5	CHANGE THE DRAWING	2022.01.04

Ordering Information:

C3030HM-2xXP - ***

1 2

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0

GWT: Nylon 66,UL94V-0,

IEC 60335-1,5th Edition

Glow Wire Capable.

V2: Nylon 66,UL94V-2

SPECIFICATIONS:

Current Rating: 12.5A AC,DC (MAX)

Voltage Rating: 600V AC,DC

Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact Resistance: $10\text{m}\Omega$ Max

Insulation Resistance: $1000\text{M}\Omega$ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0 (Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
C3030HM-2x1P	---	3.85
C3030HM-2x2P	3.00	6.85
C3030HM-2x3P	6.00	9.85
C3030HM-2x4P	9.00	12.85
C3030HM-2x5P	12.00	15.85
C3030HM-2x6P	15.00	18.85
C3030HM-2x7P	18.00	21.85
C3030HM-2x8P	21.00	24.85
C3030HM-2x9P	24.00	27.85
C3030HM-2x10P	27.00	30.85
C3030HM-2x11P	30.00	33.85
C3030HM-2x12P	33.00	36.85

Beijing Hongli Kunpeng International Trade Co.,Ltd.

Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 1	3.00mm PITCH DUAL ROW HOUSING	
DRWN	CHK'D	APPR		
Xu Lei	Djankui Wan	Jack Yin	DRAWING NO.	
General Tolerances			THIRD ANGLE PROJECTION	
x.x $\pm$ 0.25 x.xx $\pm$ 0.20 x.xxx $\pm$ 0.15 ANGLES $\pm 1^{\circ}$			HLB-30-HM-2xXP 41	
			REV A5	