

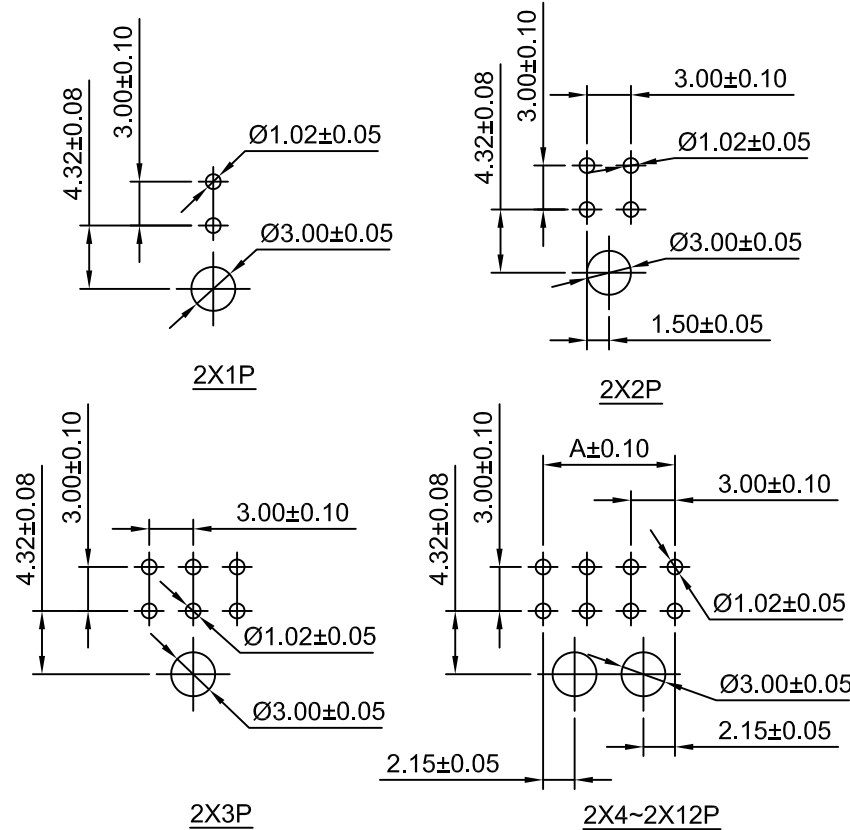


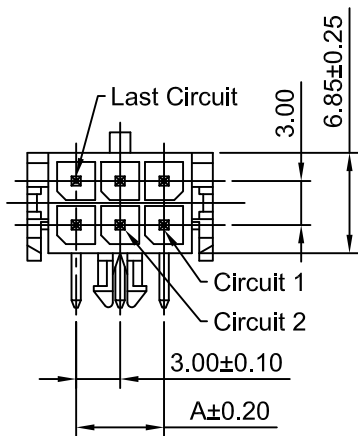

P.C.B LAYOUT



Ordering Information:

C3030WR-2xXP - ** - **
1 2 3

1.Part No.

2.Material:

(blank):Nylon 66 UL94V-0

LCP:LCP UL94V-0

GWT:Nylon 66 UL94V-0,GWT 750°C

3.Finish:


(blank):Tin over Nickel

G:Gold over Nickel(1"U)

G3:Gold over Nickel(3"U)

G15:Gold over Nickel(15"U)

G30:Gold over Nickel(30"U)



SPECIFICATIONS:

Current Rating:12.5A AC,DC (AWG #18)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x1P	---	6.65	2x7P	18.00	24.65
2x2P	3.00	9.65	2x8P	21.00	27.65
2x3P	6.00	12.65	2x9P	24.00	30.65
2x4P	9.00	15.65	2x10P	27.00	33.65
2x5P	12.00	18.65	2x11P	30.00	36.65
2x6P	15.00	21.65	2x12P	33.00	39.65

Beijing Hongli Kunpeng International Trade Co., Ltd.

	Unit	Scale	Sheet	TITLE	
	mm	2:1	1 of 1		
	DRWN	CHK'D	APPR	3.00mm PITCH	
	Xu Lei	Diankui Wan	Jack Yin		
7	General Tolerances		THIRD ANGLE PROJECTION	RIGHT-ANGLE DUAL ROW WAFER	
9	x.xx±0.25			DRAWING NO.	
	x.xxx±0.20			HLB-30-WR-2xXP 30	
0	x.xxxx±0.15 ANGLES ±1°				
				REV A2	

A2	CHANGE THE DRAWING	2022.01.17
A1	CHANGE THE Current Rating	2018.12.19
A0	NEW RELEASE	2009.05.10
REV	DESCRIPTION	DATE