

Ordering Information:
A2005WV-N-S-2xXP - ***
1 2

1.Part No.
2.Size(L):
(Blank):1.25mm
L08:0.80mm

SPECIFICATIONS:



Current Rating: 2A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Gold over Nickel
Material: PA6T ,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x4P	6.00	15.30	2x20P	38.00	47.30
2x5P	8.00	17.30	2x21P	40.00	49.30
2x6P	10.00	19.30	2x22P	42.00	51.30
2x7P	12.00	21.30	2x23P	44.00	53.30
2x8P	14.00	23.30	2x24P	46.00	55.30
2x9P	16.00	25.30	2x25P	48.00	57.30
2x10P	18.00	27.30	2x26P	50.00	59.30
2x11P	20.00	29.30	2x27P	52.00	61.30
2x12P	22.00	31.30	2x28P	54.00	63.30
2x13P	24.00	33.30	2x29P	56.00	65.30
2x14P	26.00	35.30	2x30P	58.00	67.30
2x15P	28.00	37.30	2x31P	60.00	69.30
2x16P	30.00	39.30	2x32P	62.00	71.30
2x17P	32.00	41.30	2x33P	64.00	73.30
2x18P	34.00	43.30	2x34P	66.00	75.30
2x19P	36.00	45.30			

Beijing Hongli Kunpeng International Trade Co.,Ltd.

Unit		Scale		Sheet		Title : 2.00mm PITCH 180° DUAL ROW BOX HEADER - SMT TYPE	
mm		3:1		1 of 1			
Draw BY:		Approved :					
LIZQ		GONGYB					
General Tolerance							
x.xs≤0.25		ANGLE± 					
x.xx≤0.20							
x.xxx≤0.15							
5						DRAW NO : HLB-05-WV-N-S-2xXP 45	
						REV A0	

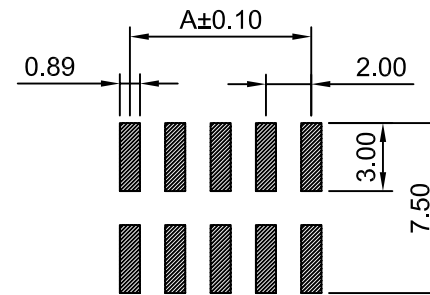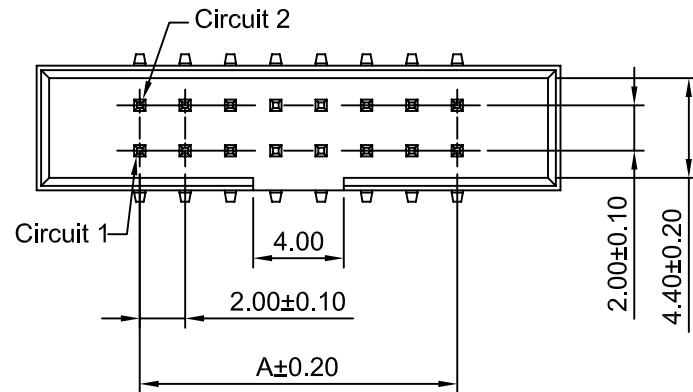

P.C.B LAYOUT

