

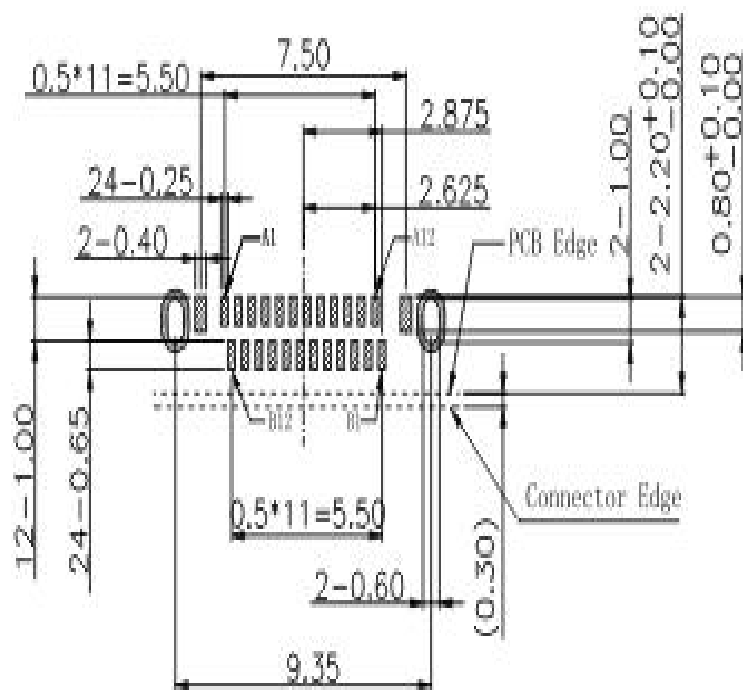
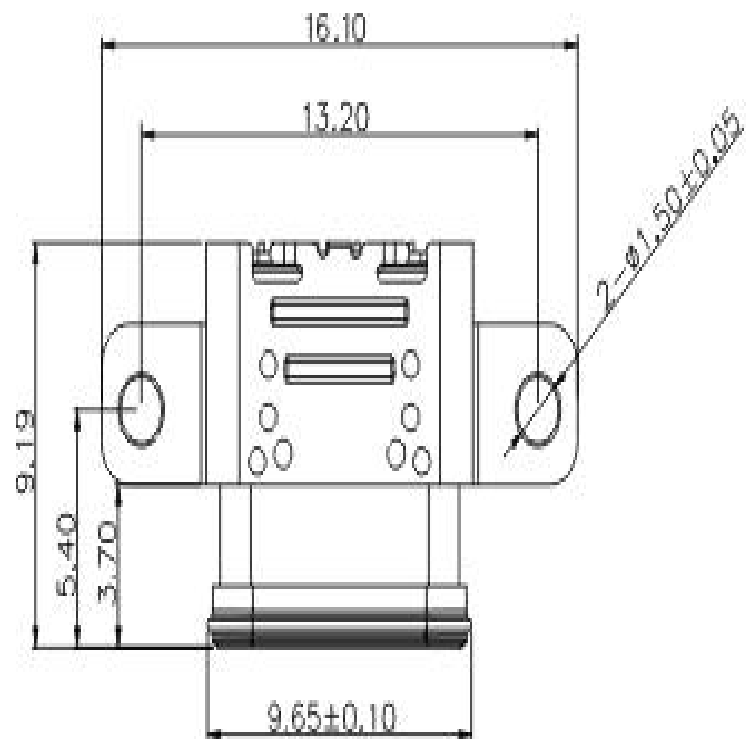


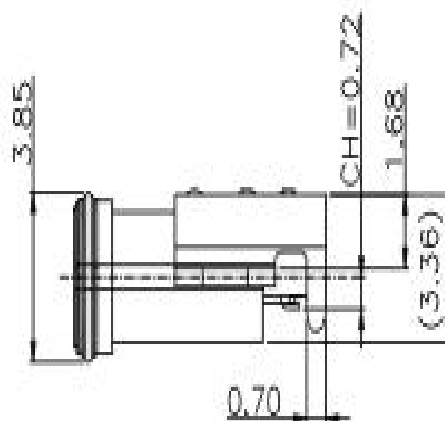

RECOMMENDED P.C.B LAYOUT(Both sides are sample)

Tolerance:±0.05,Thickness=0.60mm

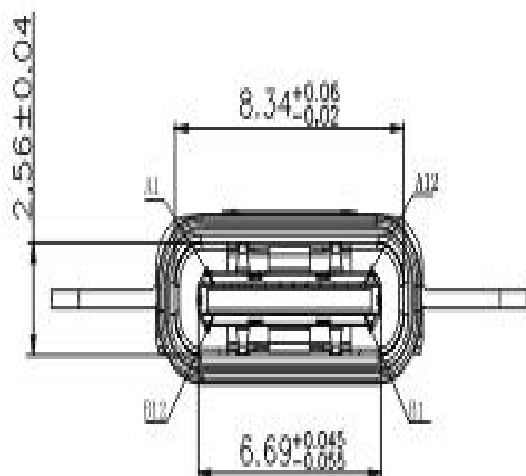

TYPE-C Female Water-Proof(IPX8)

90 ° 24P(CH=0.72mm)

Current Rating : 3.0 Ampere

Insulation Resistance : 100 MΩ
Min

Dielectric Withstanding : 100 V

Contact Resistance :40 mΩ Max

Mating Force : 5~20N

Unmating Force: 8~20N

Durability : 10000 Cycles