
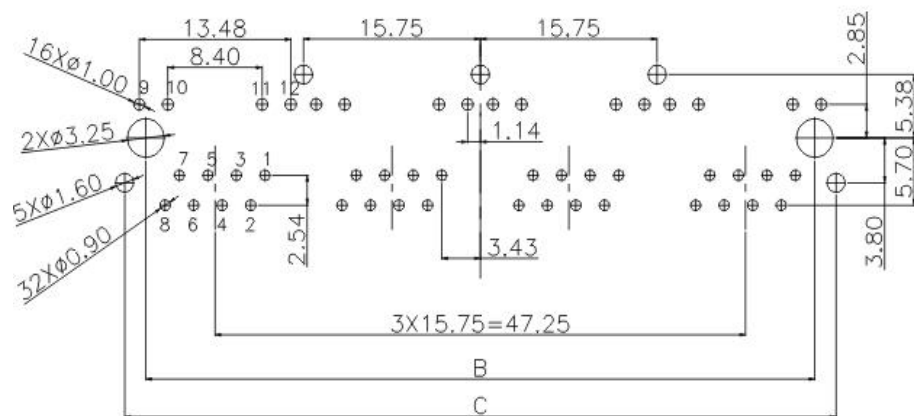
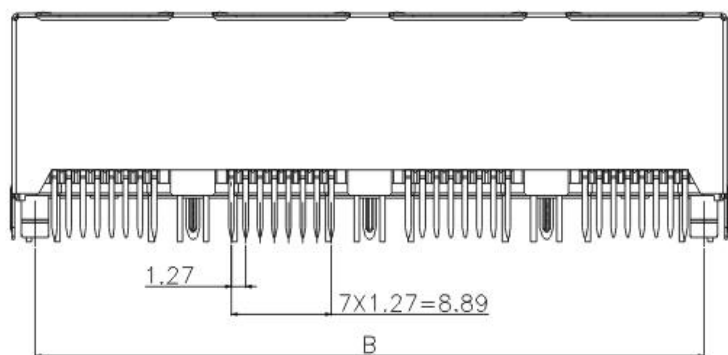
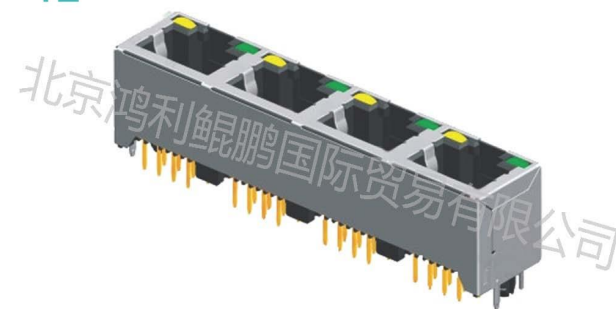
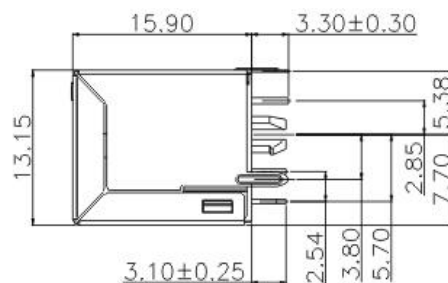


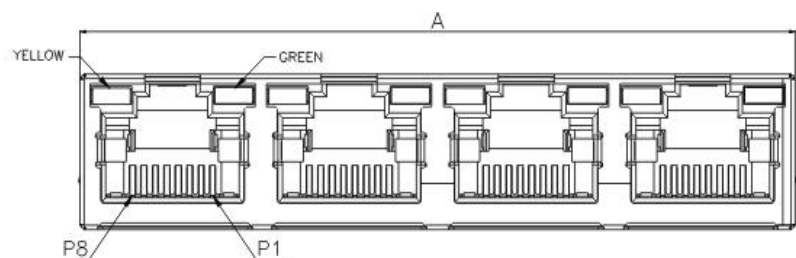

Recommended PCB Layout
(PCB TOLERANCE±0.05)

SIZE	PORT	1X1	1X4
A		16.60	63.70
B		12.60	59.58
C		16.25	63.35

1X4 Port, Shielded, With LED, Straight Thin Type

Current Rating : 1.5 Ampere

Insulation Resistance : 1000 MΩ Min

Dielectric Withstanding : 1000 V

Contact Resistance : 30 mΩ Max

Mating Force : 30N Max

Unmating Force: 50N Min

Durability : 750 Cycles