
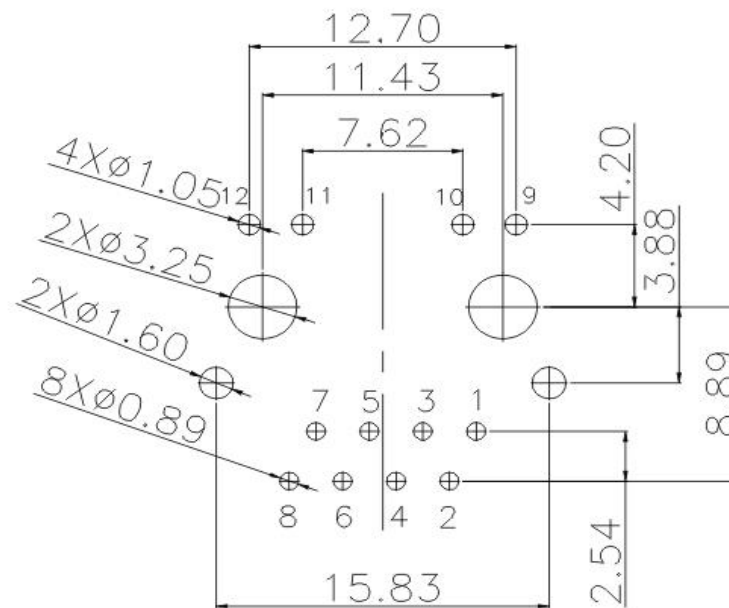
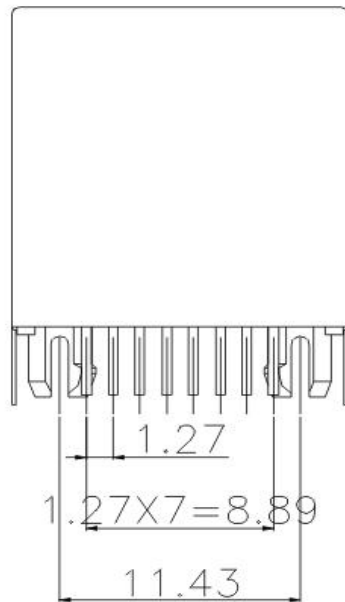
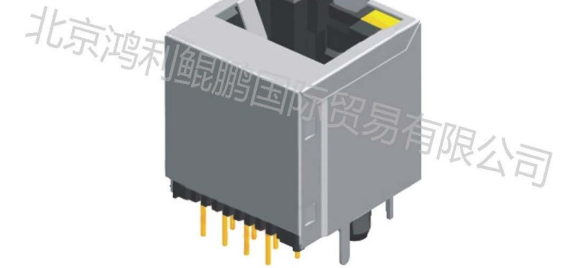
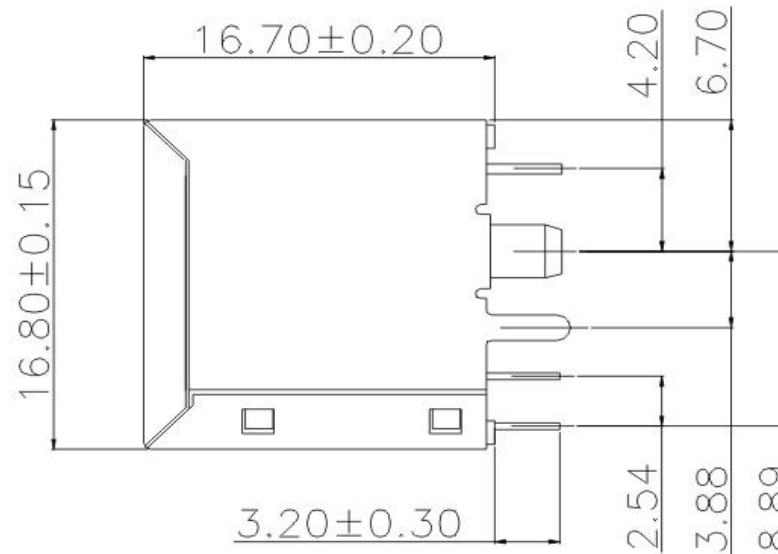


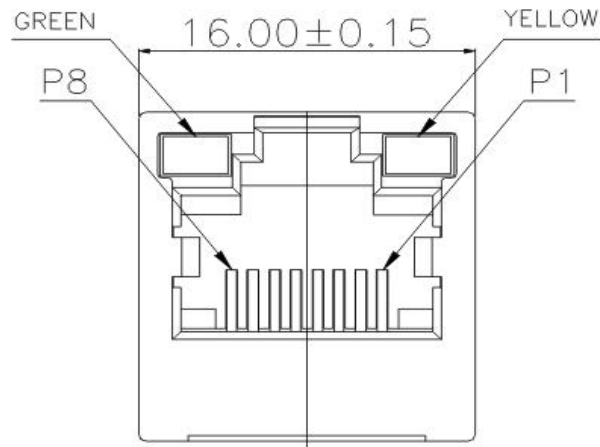

Recommended PCB Layout
(PCB TOLERANCE±0.05)

**Single Port,Shielded,With LED,
Straight Type**

Current Rating : 1.5 Ampere

Insulation Resistance : 1000 MΩ
Min

Dielectric Withstanding : 1000 V

Contact Resistance :30 mΩ Max

Mating Force : 30N Max

Unmating Force: 50N Min

Durability : 750 Cycles