
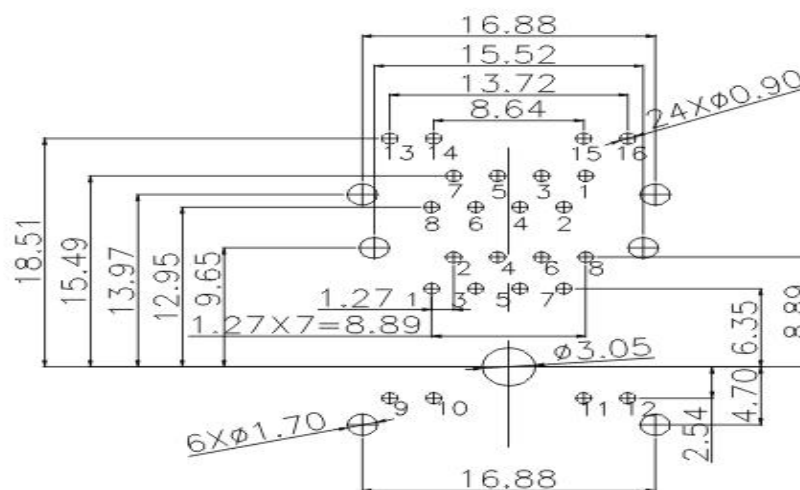
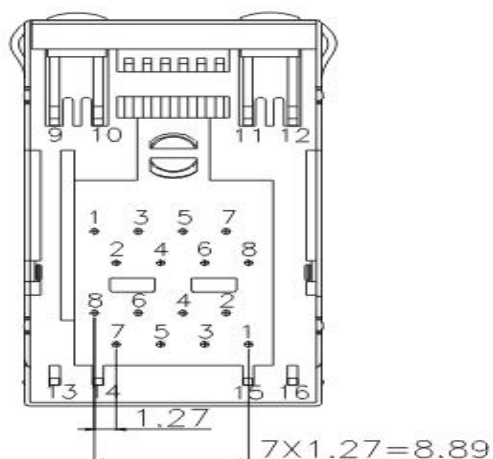
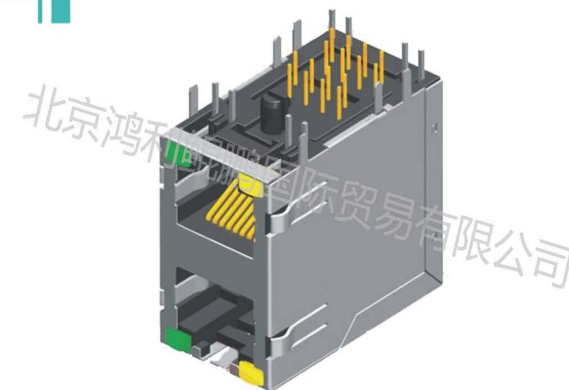


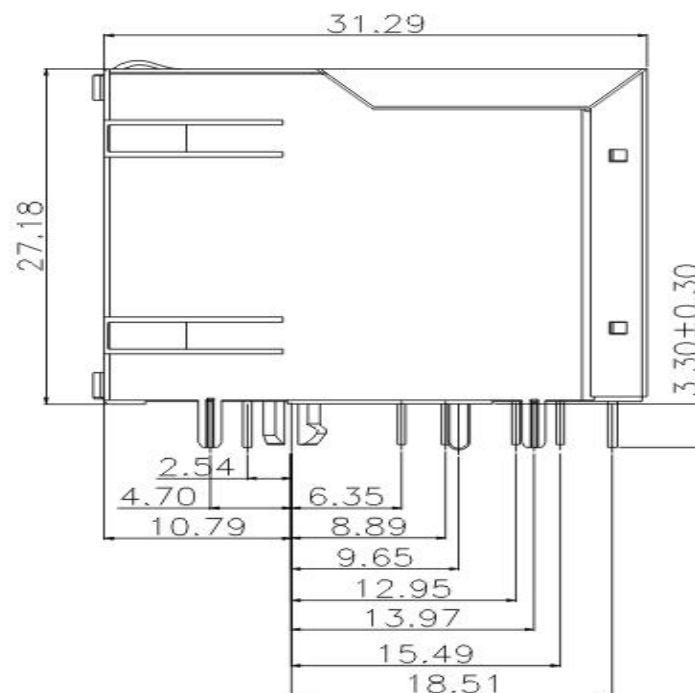

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

2x1 Port,Shielded,With LED, R/A
Type

Current Rating : 1.5 Ampere

Insulation Resistance : 1000 M Ω
Min

Dielectric Withstanding : 1000 V

Contact Resistance :30 mΩ Max

Mating Force : 30N Max

Unmating Force: 50N Min

Durability : 750 Cycles