

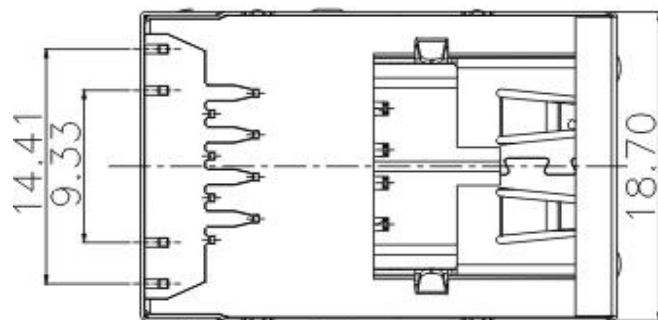
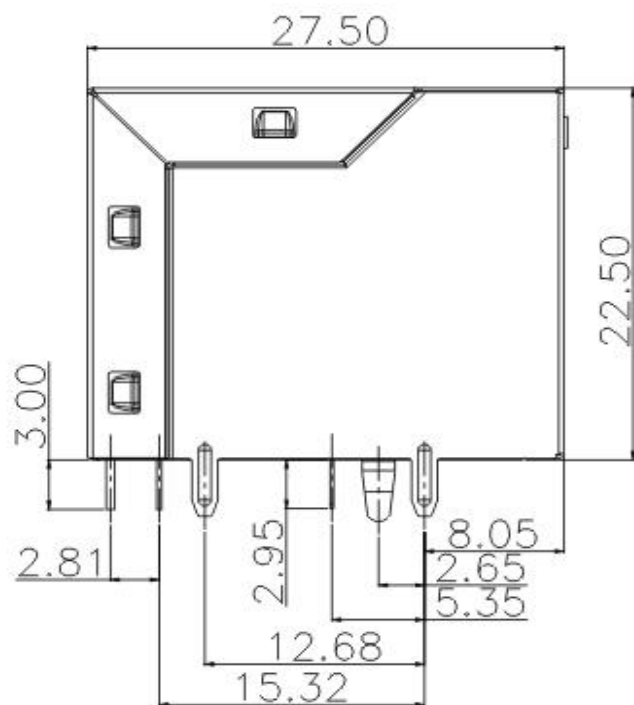
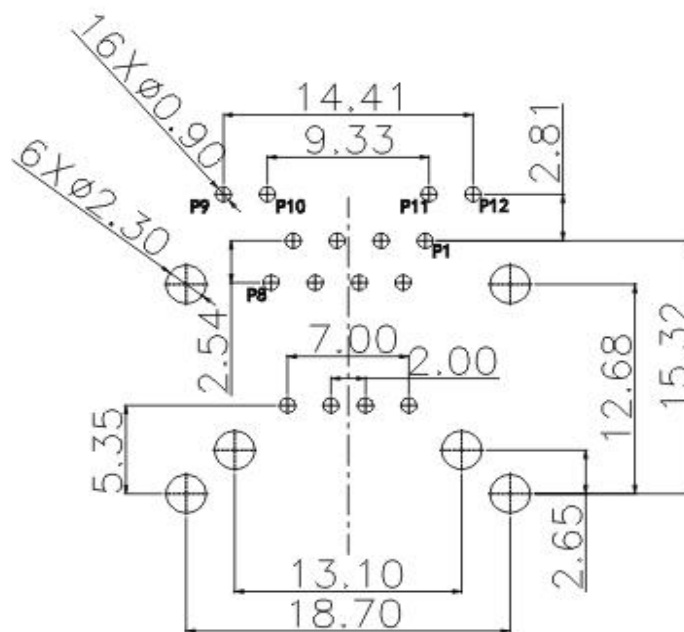


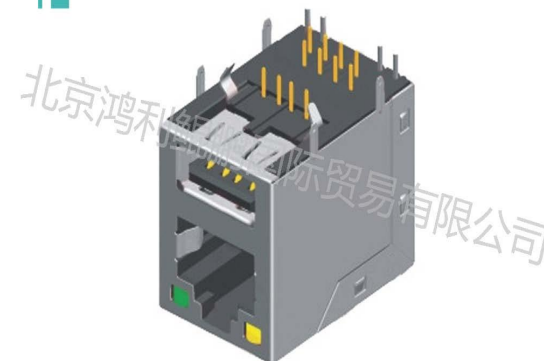

LEFT LED RIGHT LED

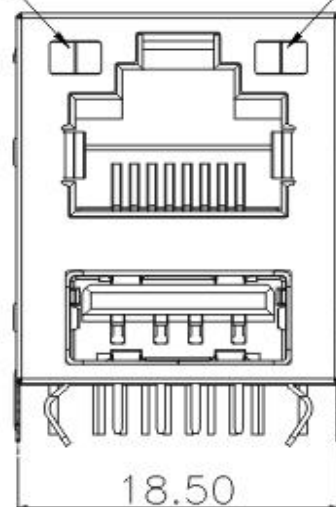

Recommended PCB Layout
(PCB TOLERANCE $\pm$ 0.05)

**Rj45 with Single Port USB2.0,
Shielded,With LED, R/A Type**
Current Rating : 1.5 Ampere

Insulation Resistance : 1000 M Ω
Min

Dielectric Withstanding : 1000 V

Contact Resistance :30 m Ω Max

Mating Force : 30N Max

Unmating Force: 50N Min

Durability : 750 Cycles