

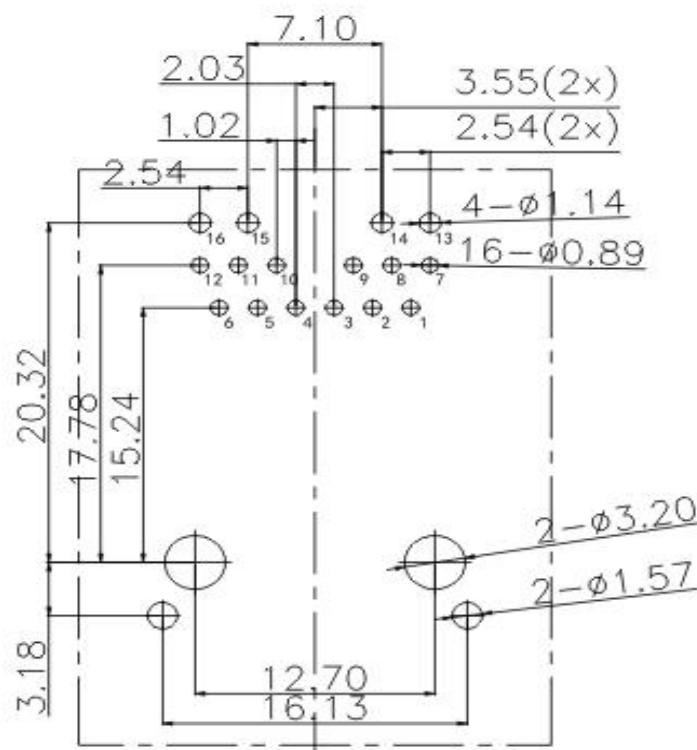
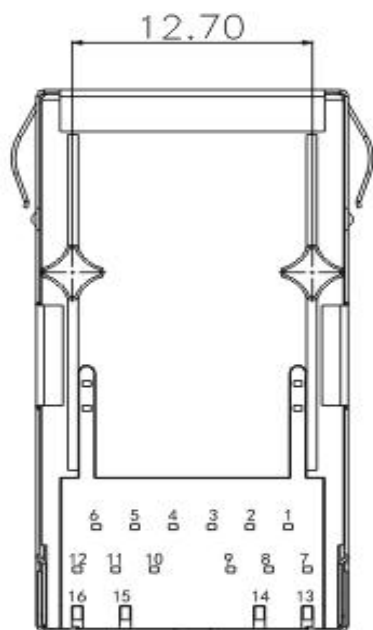
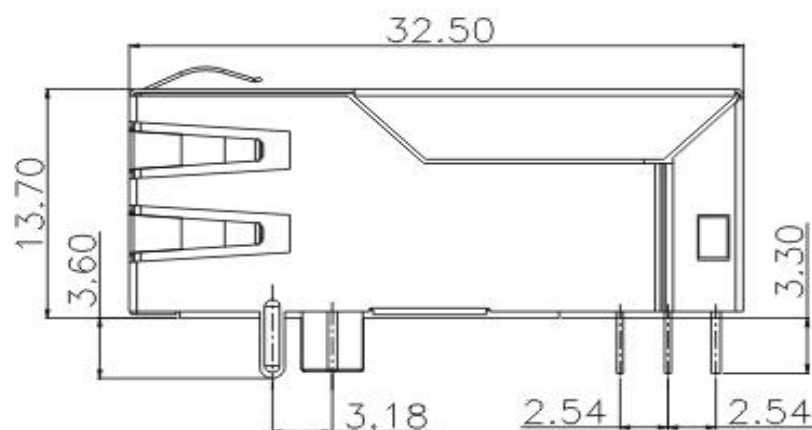


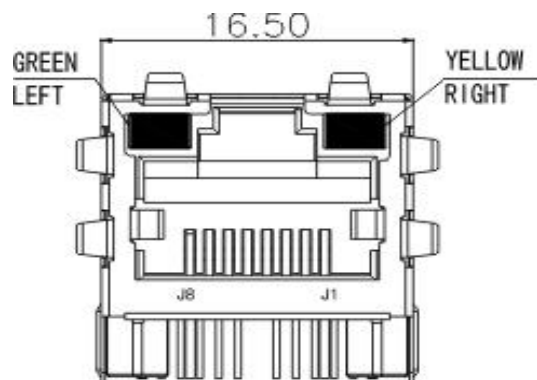

Recommended PCB Layout
(PCB TOLERANCE $\pm$ 0.05)

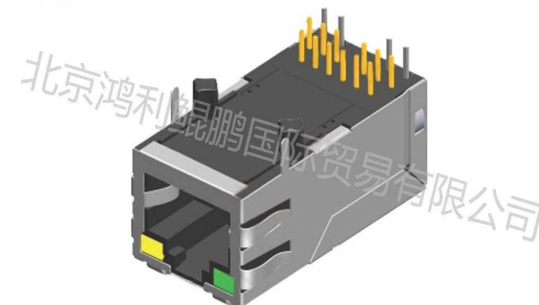

Single Port, TAB-Up(32.5), R/A Type

Current Rating : 1.5 Ampere

Insulation Resistance : 1000 M Ω Min

Dielectric Withstanding : 1500 V

Contact Resistance : 30 m Ω Max

Mating Force : 30N Max

Unmating Force: 50N Min

Durability : 750 Cycles