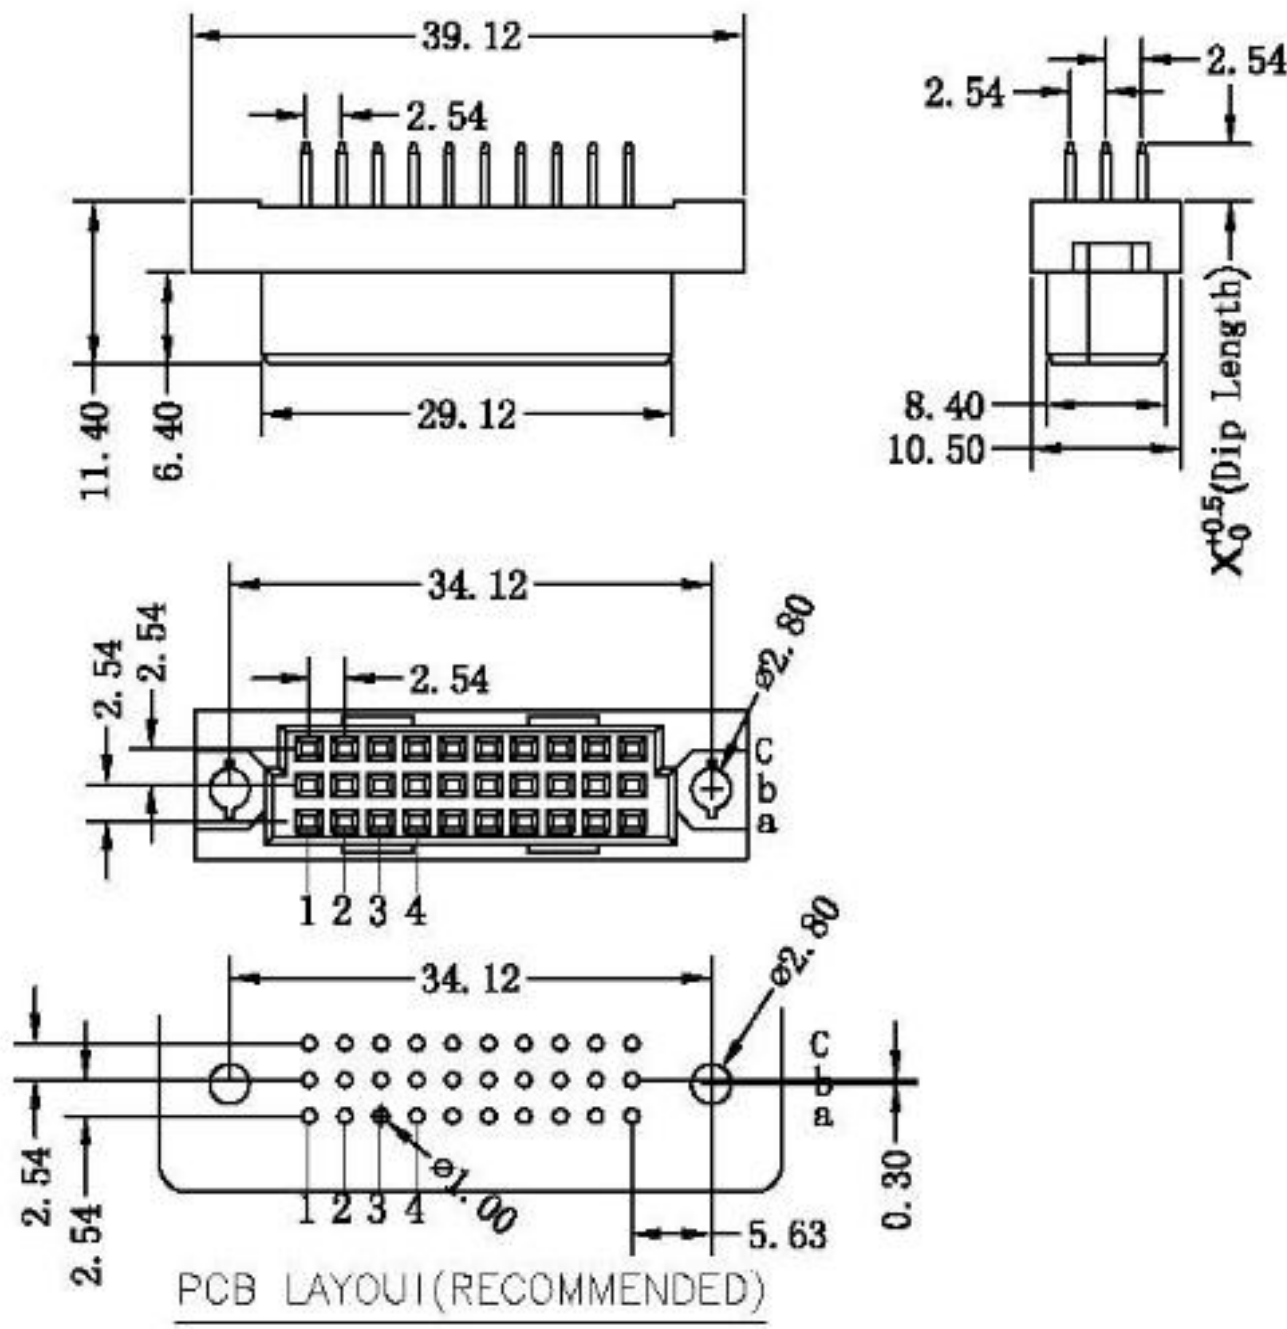


HLAL Series

DIN41612 C Type Female

Drawing NO. : DIN077

UNIT:mm



MATERIAL:

Contacts:Brass

Housing:PBT UL 94V-0

ELECTRICAL CHARACTERISTICS:




Current Rating:2 A

Dielectric Withstanding Voltage:AC 1000V

Insulator Resistance:1000 M Ω min

Contact Resistance:30 m Ω max

Operating Temperature:-55° C~+105° C

Length	1	2	3	4	5
	X	4.0	13.0	15.0	17.0
Pitch	Position	Rows with Contacts		Contact Arrange	
2.54mm	30	a b c			
	20	a b -			
	20	a - c			
	10	a - -			
5.08mm	15	a b c			
	10	a b -			
	10	a - c			
	5	a - -			

ORDERING INFORMATION

Series N.O	Pitch(mm)	Contact Type	Position	Contact length(mm)	Contact Plating	Glod Plating	Dip Type
HLAL -	*	2	*	*	*	*	D
DIN41612 C Type	1: 2.54 2: 5.08	2:Female	30 20 15 10 5	1: 4.0 2: 13.0 3: 15.0 4: 17.0 5: 25.0	C: Dip Tin Comtact Gold G: Glod	00: G/F 02: 2u" 03: 3u" 05: 5u" 10: 10u" 15:15u" 30: 30u"	Blank: Dip

Tel: 86-10-57891098 MP :86-13001179378 or 13146881693

Mail: info@hlkpint. com or lucyliu0807 @163.com