



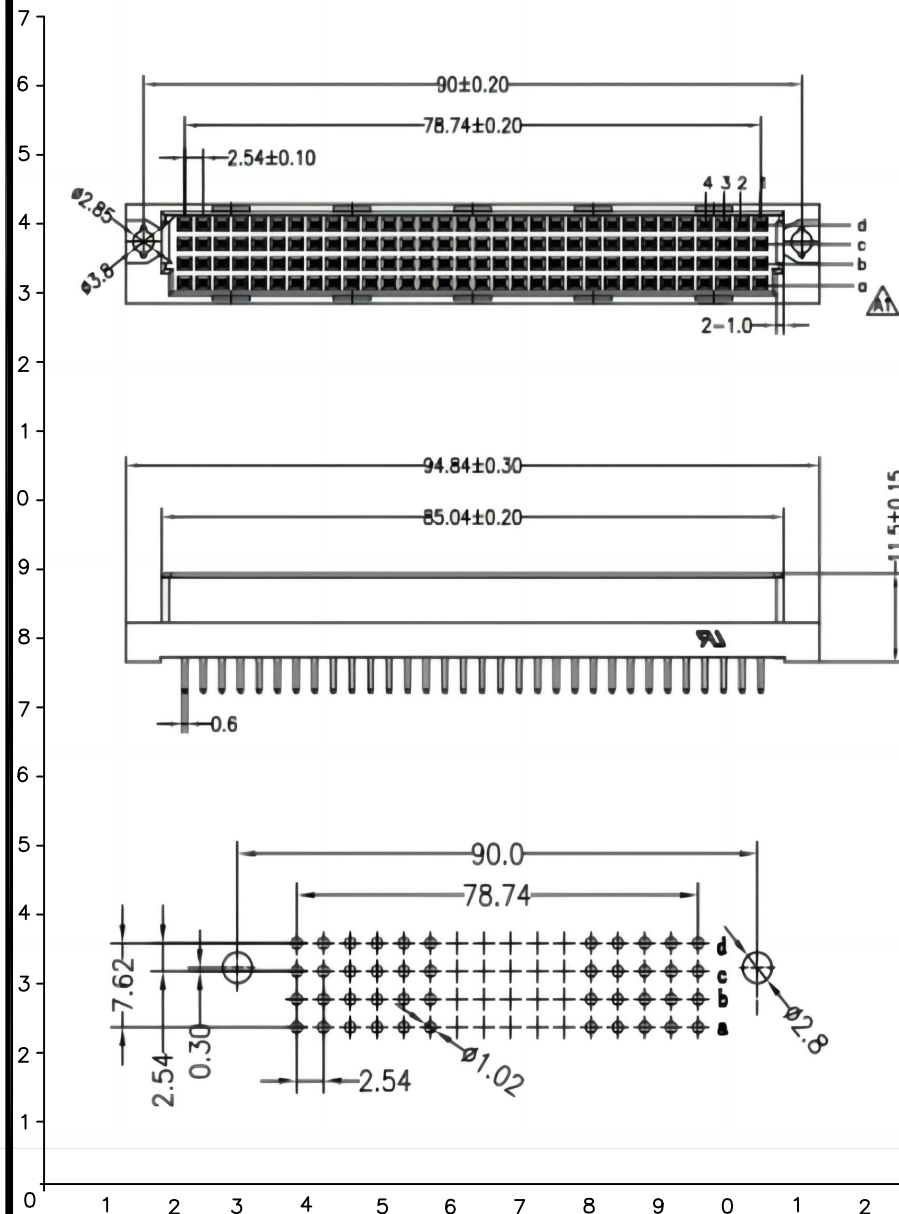

REV	DATE	DESCRIPTION

MATERIAL:
Housing: PBT UL 94V-0
Contacts: Brass
ELECTRICAL:
Current rating: 3A
Contact resistance: $30m\Omega$ max
Insulator resistance: 1000 M Ω min
Dielectric withstanding voltage: 1000V AC
Operating temperature: $-40^{\circ}C$ to $+105^{\circ}C$

HLAL -	7	2	128	1	*	*	D
7: 2.54mm 8: 5.08mm							Blank : DIP
2: Female							00: G/F 02: 2u" 03: 3u"
Position:							05: 5u" 10: 10u" 15: 15u" 30: 30u"
128							C: Dip Tin Contact Gold
Dip Length: (mm)							G: Gold
1: 4.0							



UNIT : mm

Beijing Hongli Kunpeng
International Trade Co., LTD

MODEL NAME:

European socket type C
128S straight female

SELECT	1	2	3	EXTRA
DIM	0.000	0.05	0.10	
TOL	0.00	0.10	0.15	0.20
	0.0	0.15	0.25	0.30
	0.	0.25	0.30	0.40
ANGLE	1.0°	3.0°	5.0°	

PART NO. HLAL-721281**D

APPROVED BY:

FILE NO. DIN168-46

CHECKED BY:

SCALE:

DRAW BY: jenny

DATE : 2012-3-28