
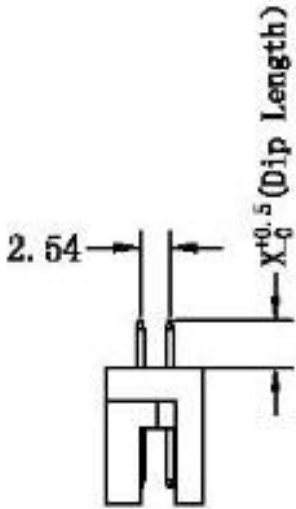


HLAL Series

DIN41612 Q Type Male

Drawing NO. : DIN159

UNIT:mm

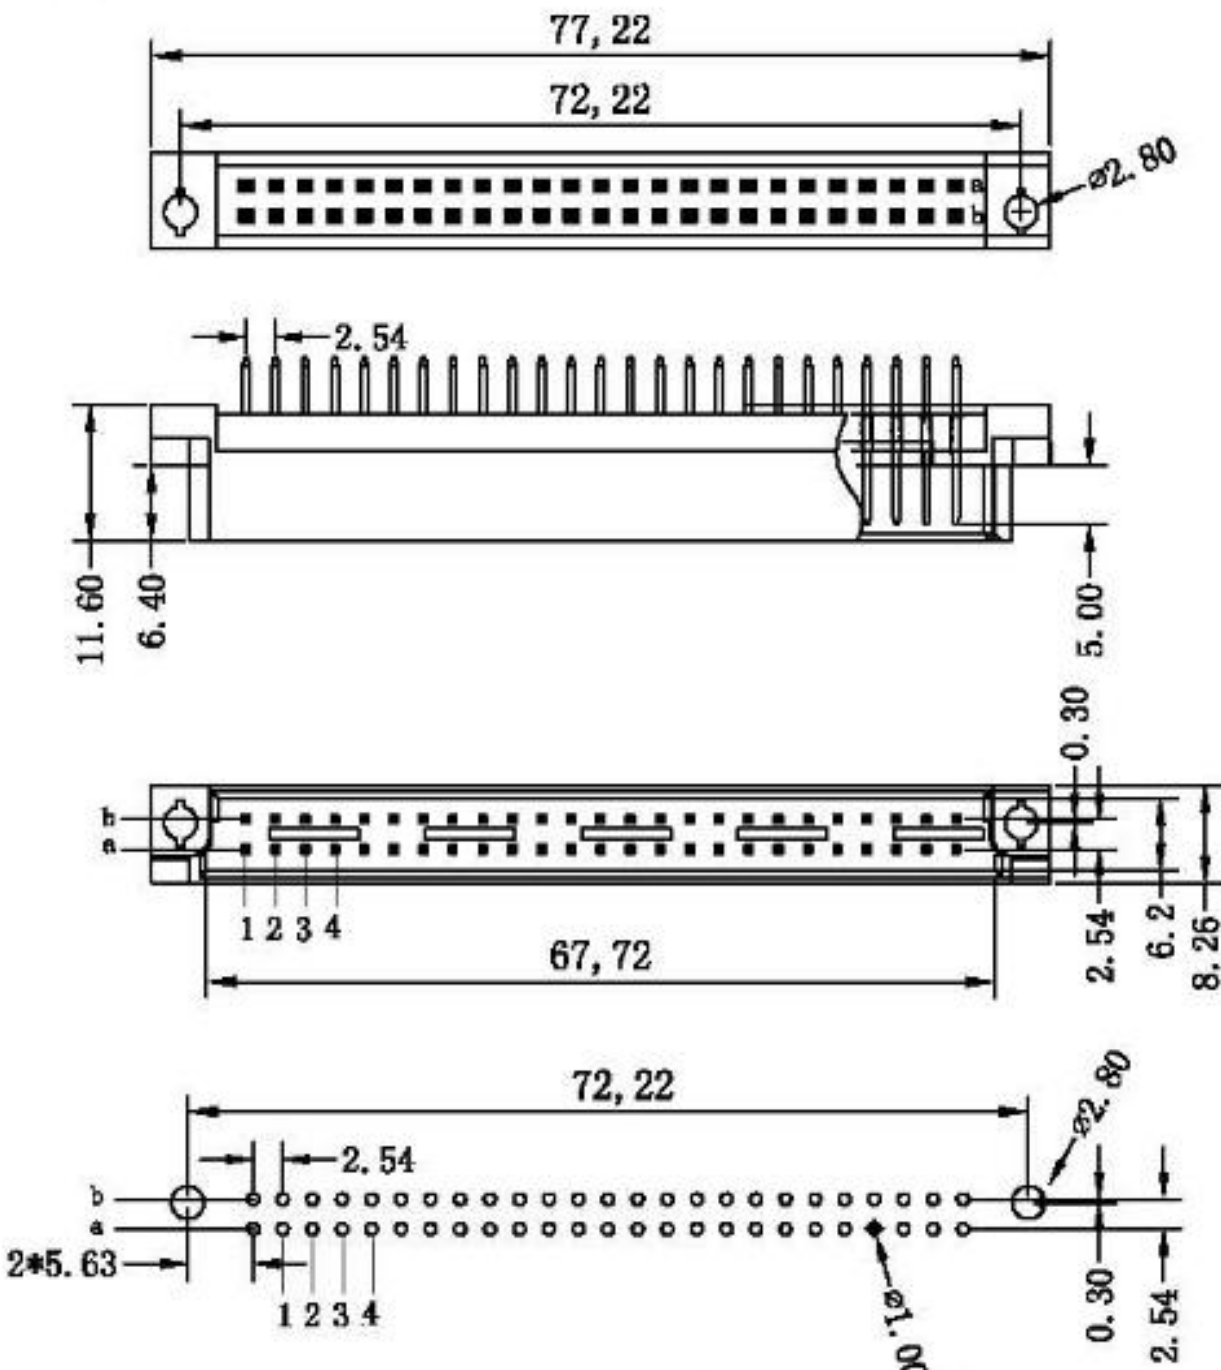

MATERIAL:

Contacts: Brass
Housing: PBT UL 94V-0

ELECTRICAL CHARACTERISTICS:

Current Rating: 2 A
Dielectric Withstanding Voltage: AC 1000V
Insulator Resistance: 1000 MΩ min
Contact Resistance: 30 mΩ max
Operating Temperature: -55° C ~ +105° C

Pitch	Position	Rows with Contacts	Length		Contact Arrange
			1	4.0	
2.54mm	50	a b			
	25	a -			
5.08mm	25	a b			

PCB LAYOUT(RECOMMENDED)

ORDERING INFORMATION

Series N.O	Pitch(mm)	Contact Type	Position	Contact length(mm)	Contact Plating	Glod Plating	Dip Type
HLAL -	*	3	*	*	*	*	D
DIN41612 Q Type	3: 2.54 4: 5.08	3:Male	50 25	1: 4.0	C: Dip Tin Comtact Gold G: Glod	00: G/F 02: 2u" 03: 3u" 05: 5u" 10: 10u" 15:15u" 30: 30u"	Blank: Dip