


HLAL Series

DIN41612 B Type Female

Drawing NO. : DIN137

UNIT:mm

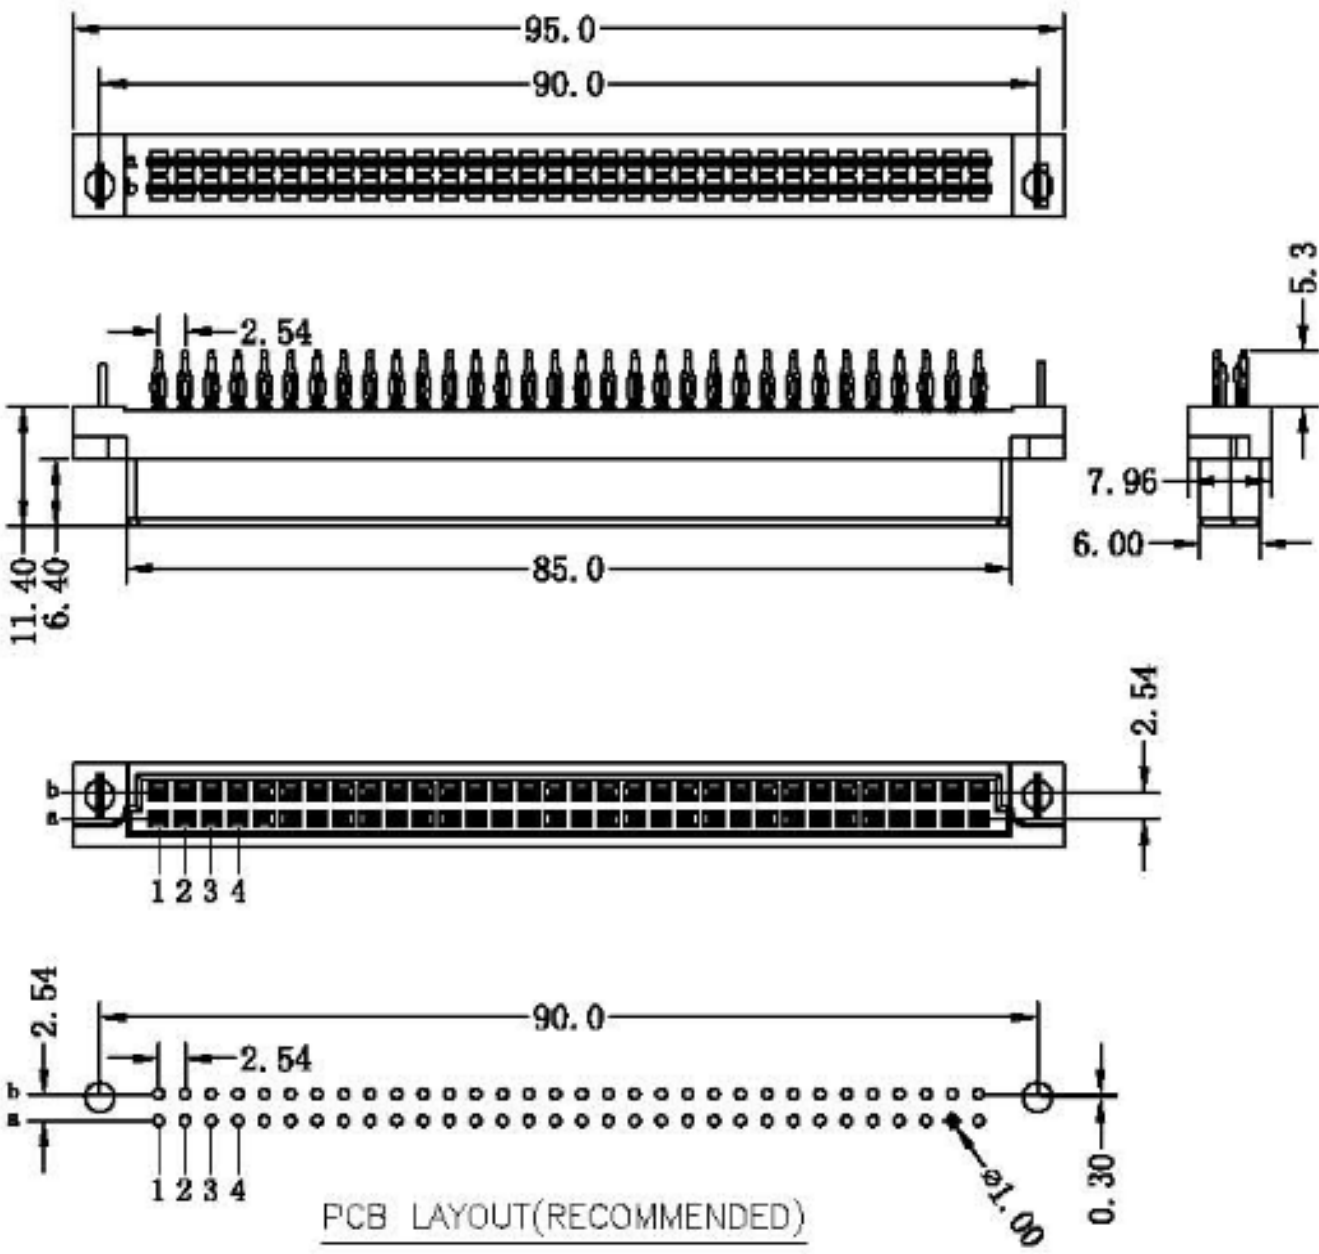

MATERIAL:

Contacts: Brass
Housing: PBT UL 94V-0

ELECTRICAL CHARACTERISTICS:

Current Rating: 2 A
Dielectric Withstanding Voltage: AC 1000V
Insulator Resistance: 1000 MΩ min
Contact Resistance: 30 mΩ max
Operating Temperature: -55° C ~ +105° C

Pitch	Position	Rows with Contacts	Contact Arrange
2.54mm	64	a b	
	32	a -	
5.08mm	32	a b	
	16	a -	

ORDERING INFORMATION

Series N.O	Pitch(mm)	Contact Type	Position	Contact length(mm)	Contact Plating	Glod Plating	Dip Type	With Lock
HLAL -	*	2	*	*	*	*	P	L1
DIN41612 C Type	3: 2.54 4: 5.08	2:Female	64 32 16	1: 5.3	C: Dip Tin Comtact Gold G: Glod	00: G/F 02: 2u" 03: 3u" 05: 5u" 10: 10u" 15:15u" 30: 30u"	Press Fit	L1:With Lock