


HLAL Series

DIN41612 C Type Male

Drawing NO. : DIN109

UNIT:mm

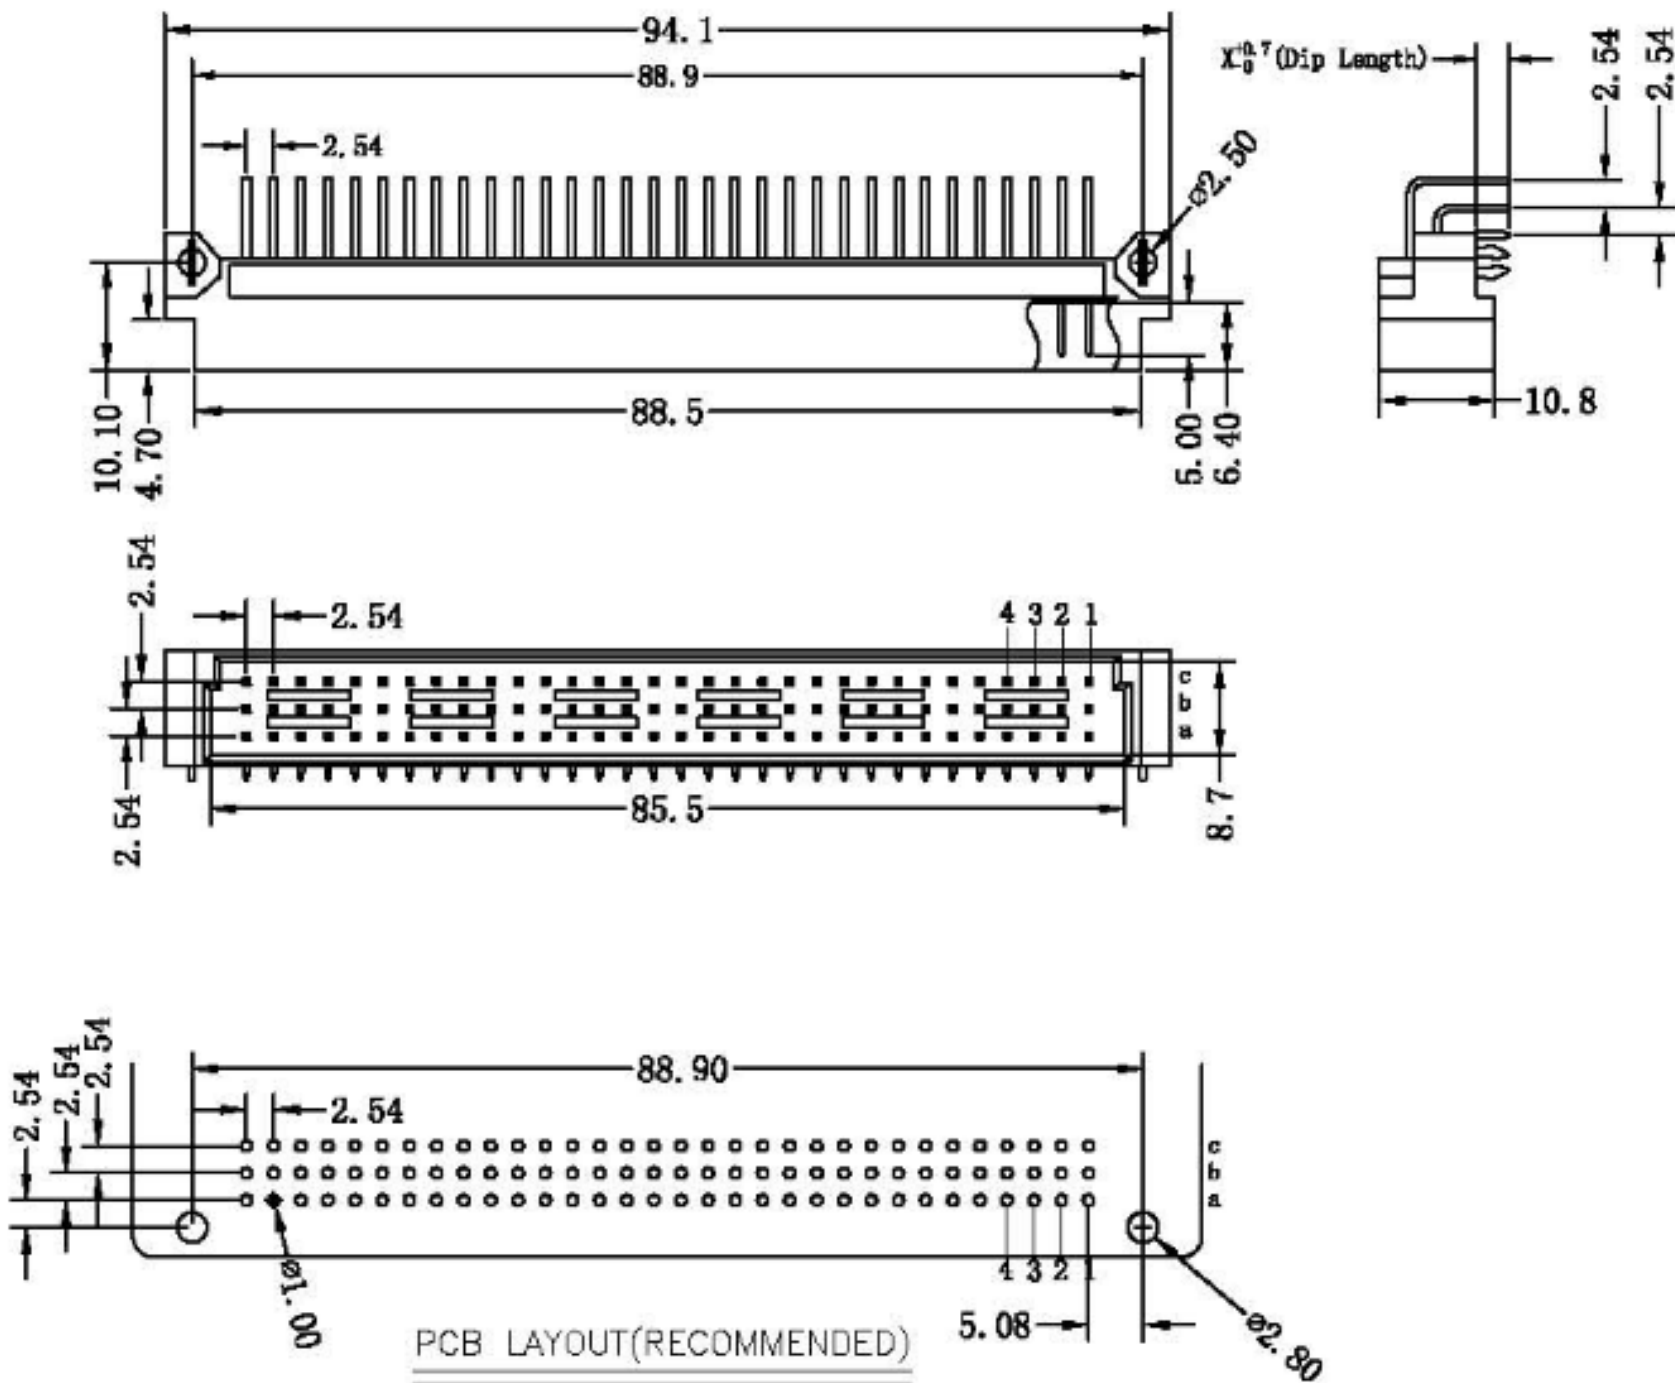

MATERIAL:

Contacts: Brass
Housing: PBT UL 94V-0

ELECTRICAL CHARACTERISTICS:

Current Rating: 2 A
Dielectric Withstanding Voltage: AC 1000V
Insulator Resistance: 1000 MΩ min
Contact Resistance: 30 mΩ max
Operating Temperature: -55° C ~ +105° C

Pitch	Position	Length	Rows with Contacts	Contact Arrange
2.54mm	96	1	a b c	
	64	2	a b -	
	64	3	a - c	
	32	4	a - -	
5.08mm	48	1	a b c	
	32	2	a b -	
	32	3	a - c	
	16	4	a - -	

ORDERING INFORMATION

Series N.O	Pitch(mm)	Contact Type	Position	Contact length(mm)	Contact Plating	Glod Plating	Dip Type	With Lock
HLAL -	*	1	*	*	*	*	D	L1
DIN41612 C Type	1: 2.54 2: 5.08	1:Male	96 64 48 32 16	1: 3.0 2: 4.0	C: Dip Tin Comtact Gold G: Glod	00: G/F 02: 2u" 03: 3u" 05: 5u" 10: 10u" 15:15u" 30: 30u"	Blank: Dip	L1:With Lock