

HLAL Series

DIN41612 C Type Male

Drawing NO. : DIN078

UNIT:mm

MATERIAL:

Contacts: Brass

Housing:PBT UL 94V-0

ELECTRICAL CHARACTERISTICS:


Current Rating:2 A

Dielectric Withstanding Voltage:AC 1000V

Insulator Resistance: 1000 M Ω min

Contact Resistance:30 mΩ max

Operating Temperature:-55° C~+105° C

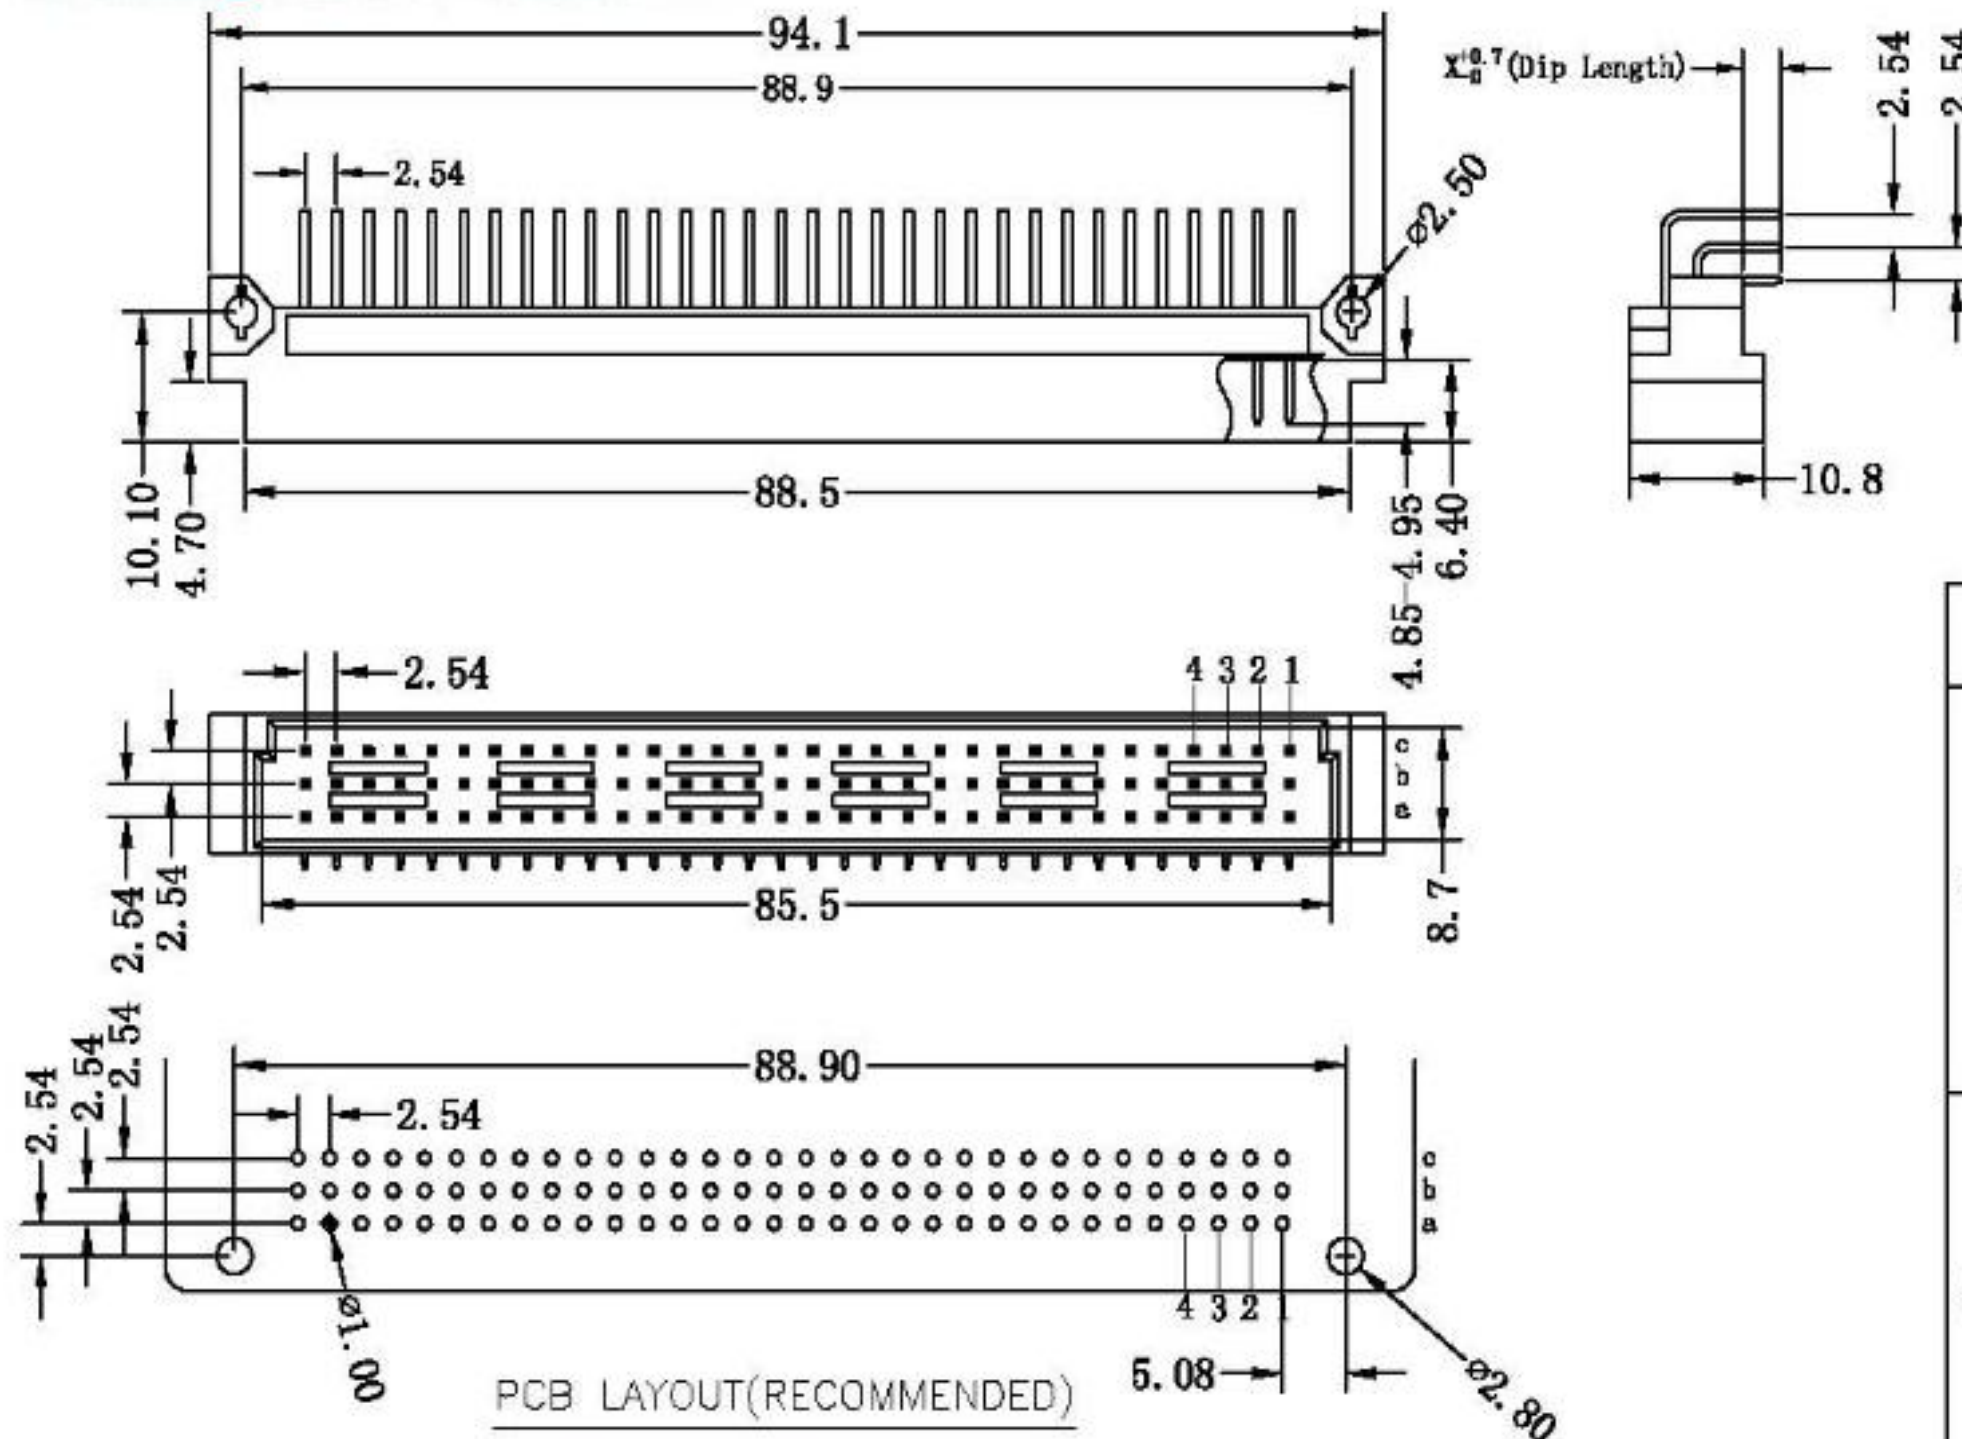

		Length	1	2
			3.0	4.0
Pitch	Position	Rows with Contacts	Contact Arrange	
2.54mm	96	a b c		
	64	a b -		
	64	a - c		
	32	a - -		
5.08mm	48	a b c		
	32	a b -		
	32	a - c		
	16	a - -		

ORDERING INFORMATION

Series N.O	Pitch(mm)	Contact Type	Position	Contact length(mm)	Contact Plating	Glod Plating	Dip Type
HLAL -	*	1	*	*	*	*	D
DIN41612 C Type	1: 2.54 2: 5.08	1:Male	96 64 48 32 16	1: 3.0 2: 4.0	C: Dip Tin Contact Gold G: Glod	00: G/F 02: 2u" 03: 3u" 05: 5u" 10: 10u" 15:15u" 30: 30u"	Blank: Dip

Tel: 86-10- 57891098 MP :86-13001179378 or 13146881693

Mail: info@hlkpint. com or lucyliu0807 @163.com