

KAQW212 Series


8PIN 60V N.O. TYPE

SOLID STATE RELAY-MOSFET OUTPUT


● Description

The KAQW212 series contains two normally open switches that can be used as two independent SPST relays or as one DPST relay. The relay is constructed using a GaAlAs LED for actuation control and an integrated monolithic dies for the switch output. The die, fabricated in a high-voltage dielectrically isolated technology, is comprised of a photodiode array, switch control circuitry and MOSFET switches.

● Schematic

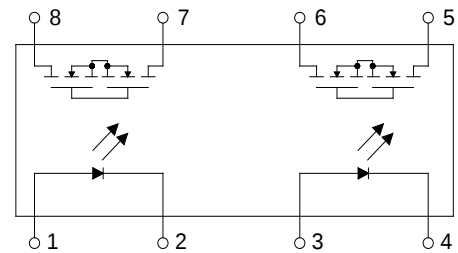

DUAL 1 FORM A
NORMALLY OPEN



● Features

1. Normally open, double pole single throw
2. Control 60V AC or DC voltage
3. Switch 400mA loads
4. Controls low-level analog signals
5. High sensitivity, low ON resistance
6. Low-level off-state leakage current
7. High isolation voltage 5KV (DIP / SMD)
8. Pb free and RoHS compliant
9. MSL class 1
10. Agency Approvals :
 - UL Approved (No. E108430): UL508
 - c-UL Approved (No. E108430)
 - FIMKO Approved: EN62368-1, EN60601-1
 - VDE Approved (No. 40053989): EN60747-5-5

KAQW212 Series

8PIN 60V N.O. TYPE
SOLID STATE RELAY-MOSFET OUTPUT


● Application

- Telecommunications (PC, electronic notepad)
- Modem
- Telephone equipment
- Security equipment
- Sensors
- Measuring and testing equipment
- Factory automation equipment
- High speed inspection machines


● Outside Dimension

Unit : mm


1. Dual-in-line type.

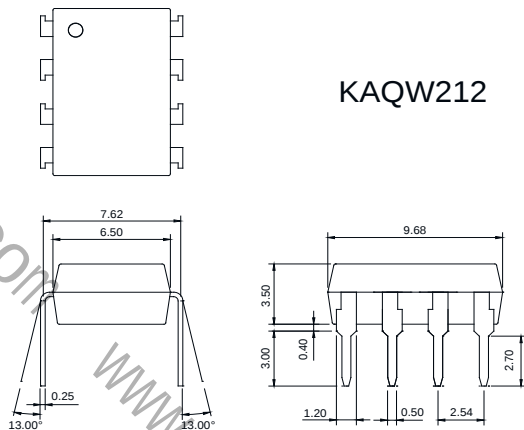

2. Surface mount type.

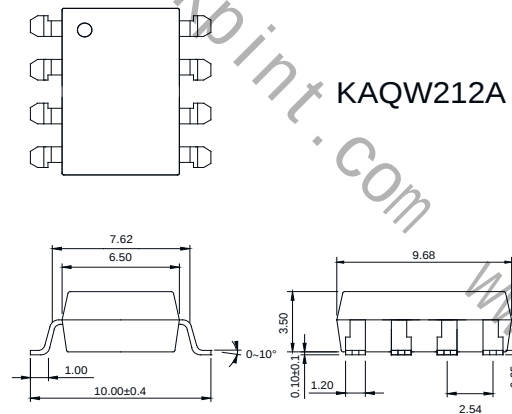

3. Small outline for surface mount type.

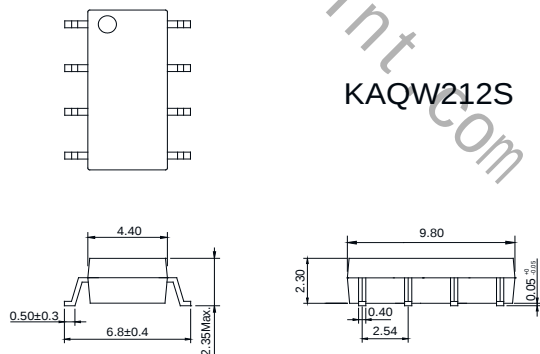

TOLERANCE : ±0.2mm



● Device Marking

KAQW212 Series

8PIN 60V N.O. TYPE
SOLID STATE RELAY-MOSFET OUTPUT

Notes :

cosmo



W212□

□(Blank): DIP or SMD

W212S

S : SOP

YWW

Y : Year code / W : Week code

● Absolute Maximum Ratings

(Ta=25°C)

Item		Symbol	Rating	Unit
Input	Continuous forward current	I_F	50	mA
	Peak forward current	I_{FP}	1	A
	Reverse voltage	V_R	5	V
	Power dissipation	P_{in}	100	mW
	Derate linearly from 25°C	-	1.3	mW/°C
Output	Breakdown voltage	V_B	60	V
	Continuous load current	I_L	400	mA
	Power dissipation	P_{out}	500	mW
Isolation voltage		V_{iso}	KAQW212S	KAQW212
			1500Vrms	5000Vrms
Isolation resistance (Vio=500V)		R_{iso}	$\geq 10^{10}$	Ω
Total power dissipation		P_t	550	mW
Derate linearly from 25°C		-	2.5	mW/°C
Operating temperature		T_{opr}	-40 to +85	°C
Storage temperature		T_{stg}	-40 to +125	°C
Junction temperature		T_j	100	°C
Soldering temperature 10 seconds		T_{sot}	260	°C

KAQW212 Series

8PIN 60V N.O. TYPE


SOLID STATE RELAY-MOSFET OUTPUT

● Electro-optical Characteristics

(Ta=25°C)

Parameter		Symbol	Conditions	Min.	Typ.	Max.	Unit
Input	Forward voltage	V_F	$I_F=10\text{mA}$	-	1.2	1.5	V
	Operation input current	I_{FON}	$V_L=20\text{V}, I_L=100\text{mA}$	-	-	3.0	mA
	Recovery input current	I_{FOFF}	$V_L=20\text{V}, I_L \leq 5\mu\text{A}$	0.2	-	-	mA
Output	Breakdown voltage	V_B	$I_B=50\mu\text{A}$	60	-	-	V
	Off-state leakage current	I_{LEAK}	$V_L=60\text{V}, I_F=0\text{mA}$	-	0.2	1.0	μA
I/O capacitance		C_{iso}	$V_B=0\text{V}, f=1\text{MHz}$	-	6	-	pF
ON resistance		R_{ON}	$I_F=10\text{mA}, I_L=100\text{mA}$	-	0.83	2.5	Ω
Turn-on time		T_{ON}	$I_F=10\text{mA}, V_L=20\text{V}$	-	0.3	1.5	ms
Turn-off time		T_{OFF}	$I_L=100\text{mA}, t=10\text{ms}$	-	0.1	1.5	ms






● Turn-on / Turn-off Time

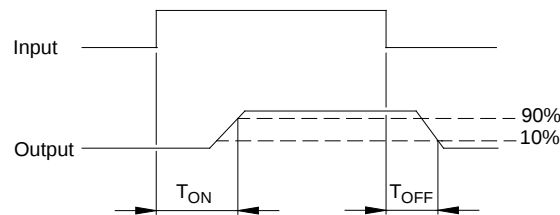

KAQW212 Series

8PIN 60V N.O. TYPE
SOLID STATE RELAY-MOSFET OUTPUT

● Schematic and Wiring Diagrams

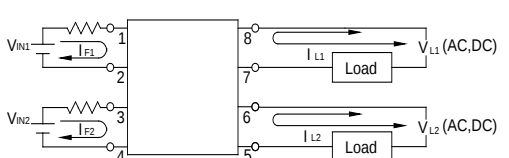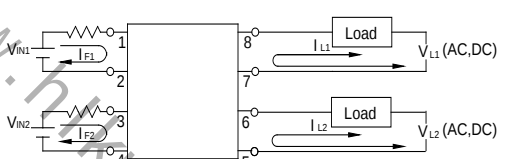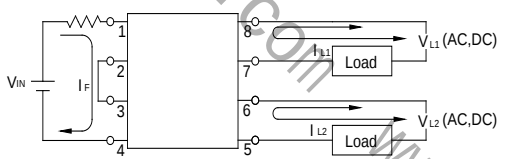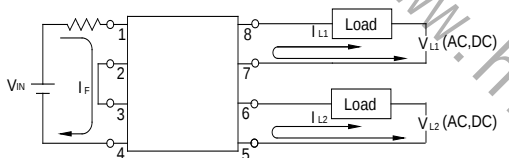Schematic	Output Configuration	Load	Connection	Wiring Diagrams
	2a	AC DC	-	(1) Two independent 1 Form A use   (2) 2 Form A use  

KAQW212 Series

8PIN 60V N.O. TYPE
SOLID STATE RELAY-MOSFET OUTPUT

Fig.1 Load Current vs. Ambient Temperature

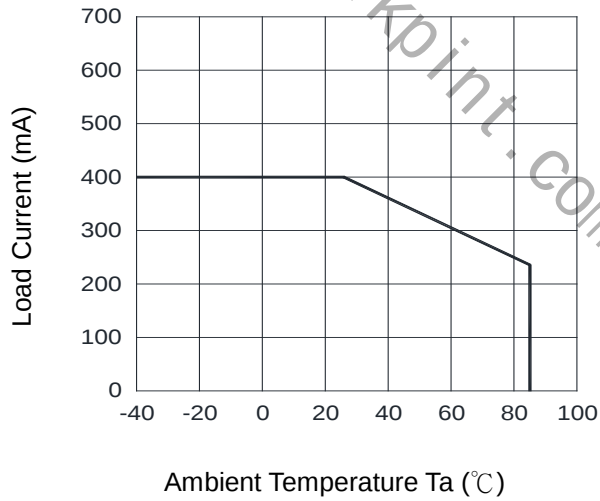


Fig.2 On Resistance vs. Ambient Temperature

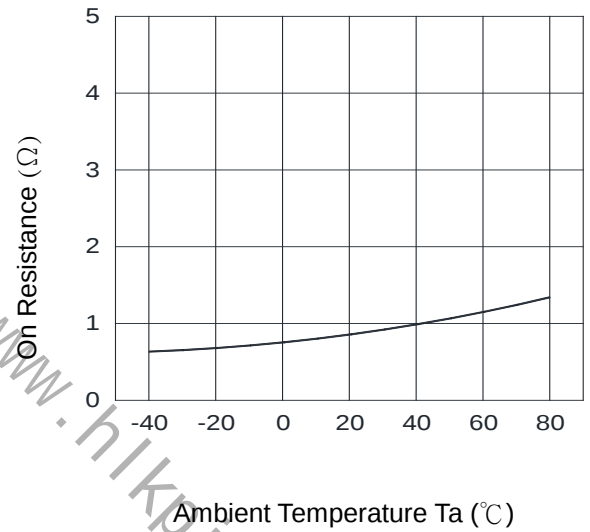


Fig.3 Turn-on Time vs. Ambient Temperature

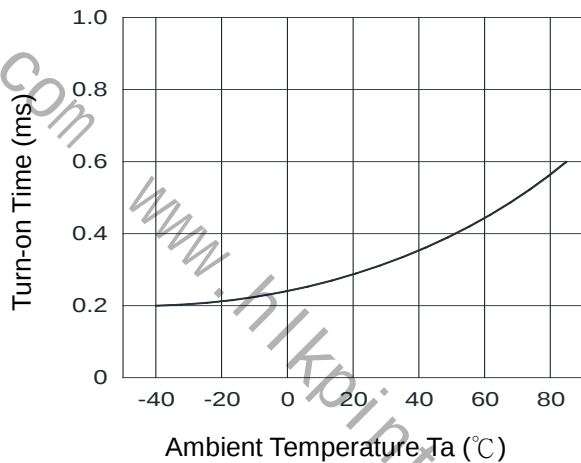


Fig.4 Turn-off Time vs. Ambient Temperature

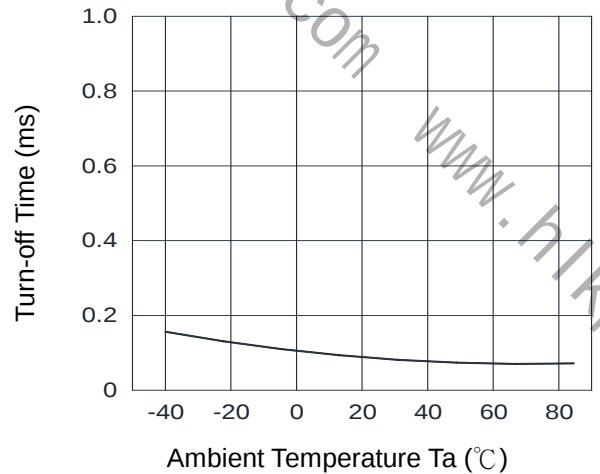


Fig.5 LED Operate Current vs. Ambient Temperature


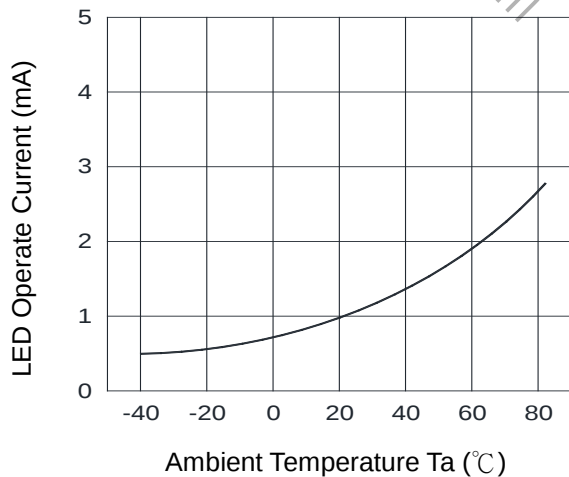


Fig.6 LED Turn-off Current vs. Ambient Temperature

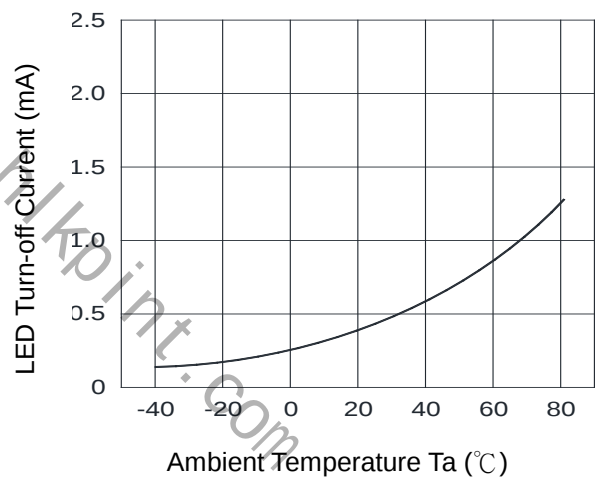

KAQW212 Series

8PIN 60V N.O. TYPE
SOLID STATE RELAY-MOSFET OUTPUT

Fig.7 LED Dropout Voltage vs. Ambient Temperature

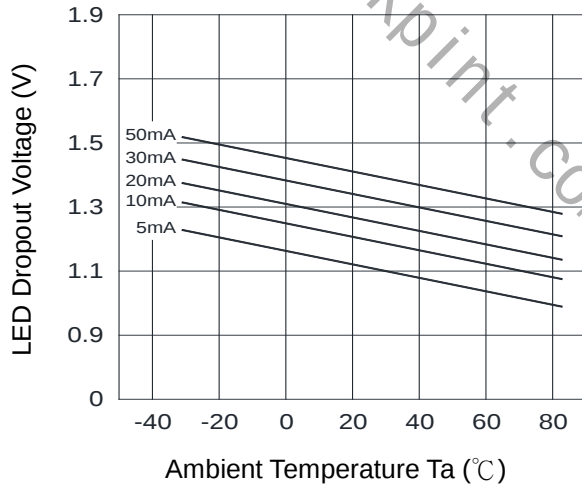


Fig.8 Voltage vs. Current Characteristics of Output at MOSFET Portion

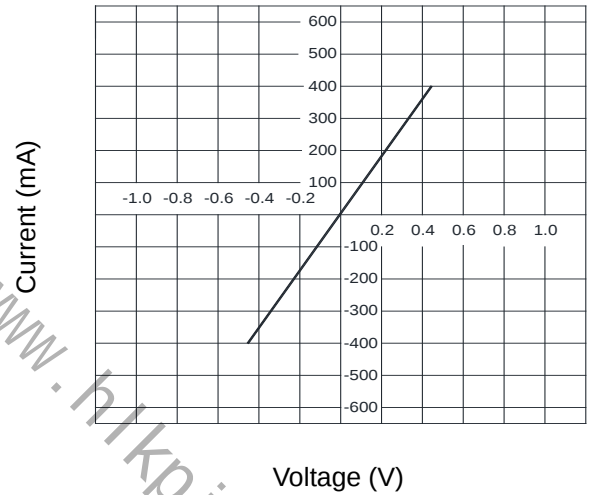


Fig.9 Turn-on Time vs. LED forward Current

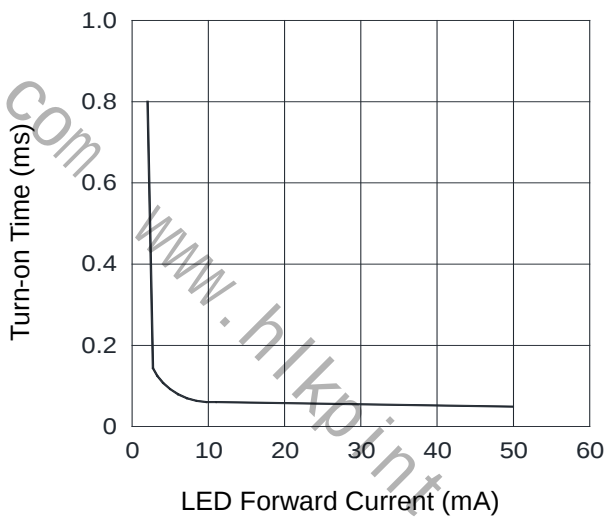


Fig.10 Off-state Leakage Current vs. Load Voltage

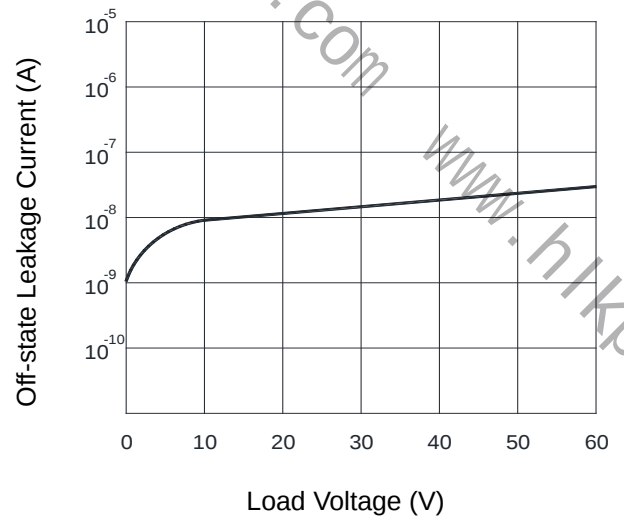


Fig.11 Turn-off Time vs. LED Forward Current


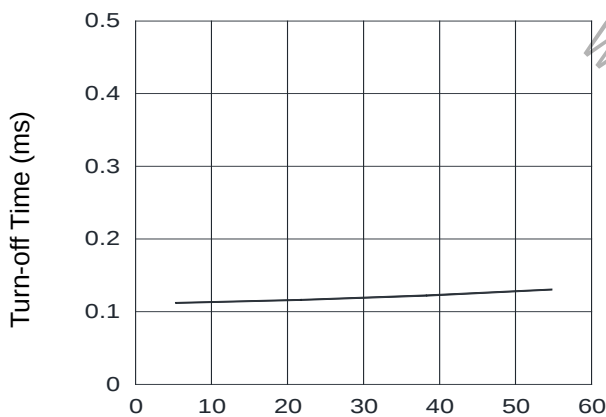


Fig.12 Output Capacitance vs. Applied Voltage

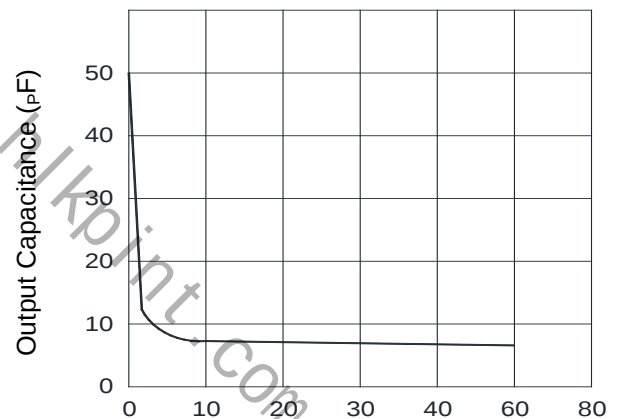

KAQW212 Series


8PIN 60V N.O. TYPE
SOLID STATE RELAY-MOSFET OUTPUT

LED Forward Current (mA)

Applied Voltage (V)


● Using Methods

Examples of resistance value to control LED forward current ($I_F=5\text{mA}$)

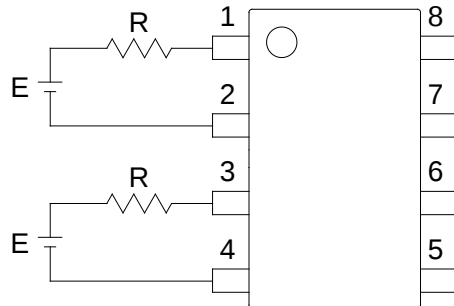

E	R
3.3V	Approx. 330 Ω
5V	Approx. 640 Ω
12V	Approx. 1.9K Ω
15V	Approx. 2.5K Ω
24V	Approx. 4.1K Ω

1. LED forward current must be more than 5mA , at E min.
2. LED forward current must be less than 50mA , at E max.

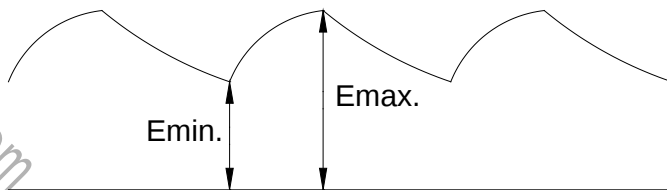


Regulate the spike voltage generated on the inductive load as follows :

KAQW212 Series

8PIN 60V N.O. TYPE

SOLID STATE RELAY-MOSFET OUTPUT

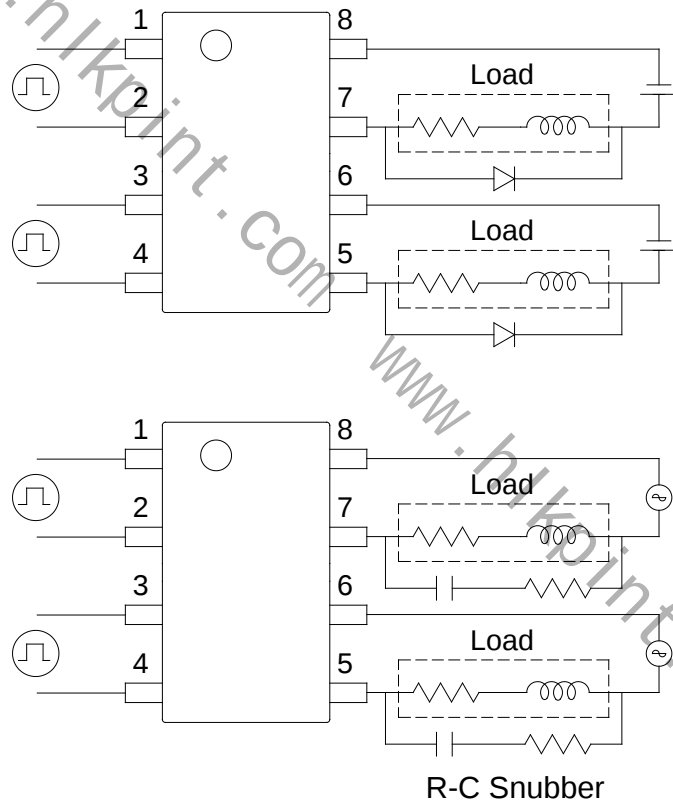


● **Recommended Soldering Conditions**

(a) Infrared reflow soldering :

- | | |
|--|---|
| ■ Peak reflow soldering : | 260°C or below (package surface temperature) |
| ■ Time of peak reflow temperature: | 10 sec |
| ■ Time of temperature higher than 230°C : | 30-60 sec |
| ■ Time to preheat temperature from 180~190°C : | 60-120 sec |
| ■ Number of reflows : | Two |
| ■ Flux : | Rosin flux containing small amount of chlorine
(The flux with a maximum chlorine content of 0.2 Wt% is recommended.) |

Recommended Temperature Profile of Infrared Reflow

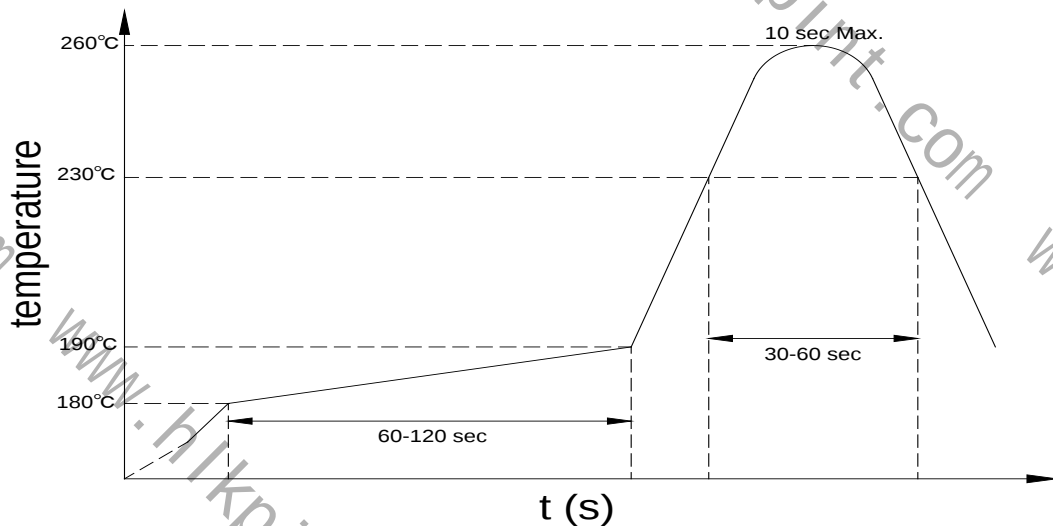

(b) Wave soldering :

- | | |
|--------------------------|--|
| ■ Temperature : | 260°C or below (molten solder temperature) |
| ■ Time : | 10 seconds or less |
| ■ Preheating conditions: | 120°C or below (package surface temperature) |
| ■ Number of times : | One |
| ■ Flux : | Rosin flux containing small amount of chlorine (The flux with a maximum chlorine content of 0.2 Wt% is recommended.) |

(c) Cautions :

- | | |
|------------|--|
| ■ Fluxes : | Avoid removing the residual flux with freon-based and chlorine-based cleaning solvent. |
| ■ | Avoid shorting between portion of frame and leads. |

KAQW212 Series

8PIN 60V N.O. TYPE
SOLID STATE RELAY-MOSFET OUTPUT

● Numbering System

KAQW212 X (Y)

Note :

KAQW212 = Part No.

X = Lead form option (blank 、 S or A)


Y = Tape and reel option (TL 、 TR)

Option	Description	Packing quantity
A (TL)	surface mount type package + TL tape & reel option	1000 units per reel
A (TR)	surface mount type package + TR tape & reel option	1000 units per reel

● Recommended Pad Layout for Surface Mount Lead Form


1. Surface mount type.

8-pin SMD

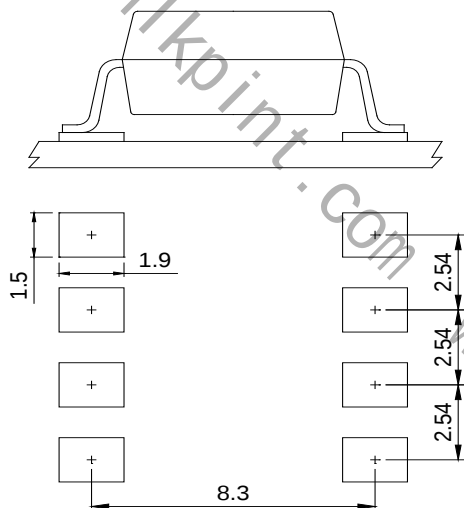

2. Small outline for surface mount type.

8-pin SOP

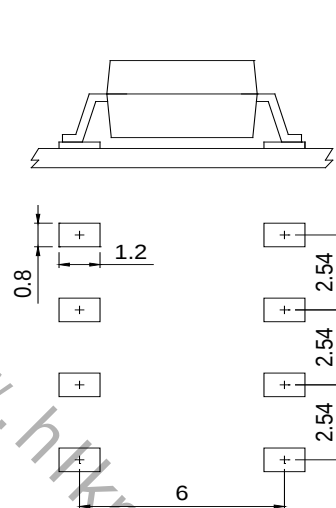

Unit : mm

KAQW212 Series

8PIN 60V N.O. TYPE
SOLID STATE RELAY-MOSFET OUTPUT

● 8-pin SMD Carrier Tape & Reel

