

KAQW414 Series


8PIN 400V N.C. TYPE

SOLID STATE RELAY-MOSFET OUTPUT


● Description

The KAQW414 series contains two normally close switches that can be used as two independent SPST relays or as one DPST relay. The relay is constructed using a GaAlAs LED for actuation control and an integrated monolithic dies for the switch output. The die, fabricated in a high-voltage dielectrically isolated technology, is comprised of a photodiode array, switch control circuitry and MOSFET switches.

● Schematic

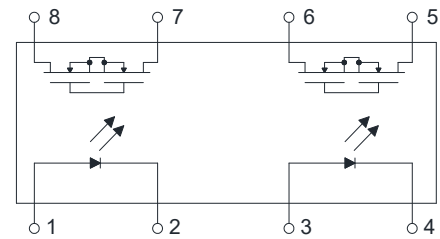

DUAL 1 FORM B
NORMALLY CLOSE



● Features

1. Normally close, double pole single throw
2. Control 400V AC or DC voltage
3. Switch 130mA loads
4. Controls low-level analog signals
5. High sensitivity, low ON resistance
6. Low-level off-state leakage current
7. High isolation voltage 5KV (DIP / SMD)
8. Pb free and RoHS compliant
9. MSL class 1
10. Agency Approvals :
 - UL Approved (No. E108430): UL508
 - c-UL Approved (No. E108430)
 - FIMKO Approved: EN62368-1, EN60601-1
 - VDE Approved (No. 40053989): EN60747-5-5

● Application

- Telecommunications (PC, electronic notepad)
- Modem
- Telephone equipment
- Security equipment
- Sensors
- Measuring and testing equipment
- Factory automation equipment
- High speed inspection machines

KAQW414 Series


8PIN 400V N.C. TYPE

SOLID STATE RELAY-MOSFET OUTPUT


● Outside Dimension

Unit : mm


1. Dual-in-line type.

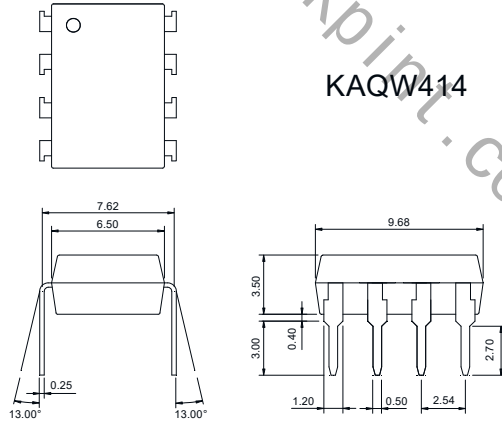

2. Surface mount type.

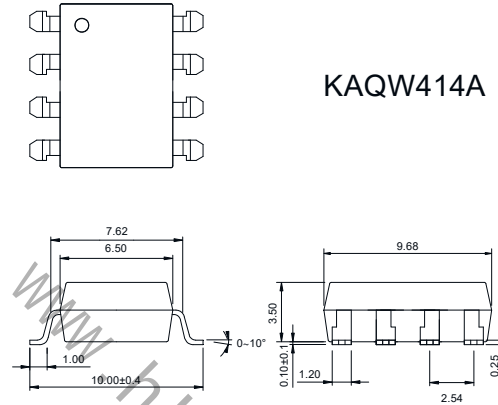


3. Small outline for surface mount type.

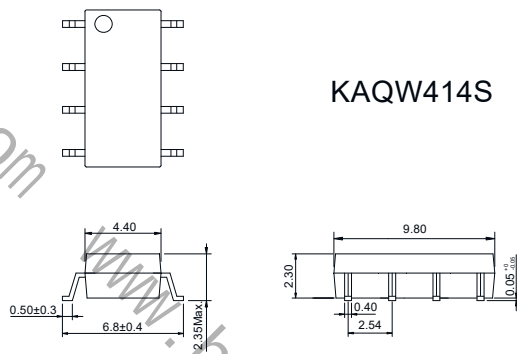

TOLERANCE : ±0.2mm

● Device Marking

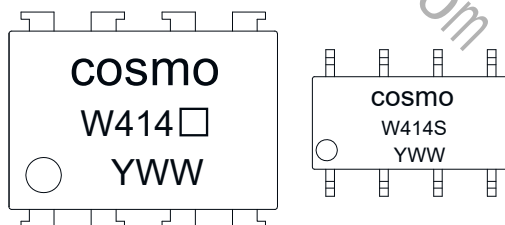

Notes :

cosmo

W414 □

W414S

YWW

□ (Blank): DIP or SMD

S : SOP

Y : Year code / W : Week code

KAQW414 Series

8PIN 400V N.C. TYPE
SOLID STATE RELAY-MOSFET OUTPUT

● Absolute Maximum Ratings

(Ta=25°C)


Item	Symbol	Rating	Unit
Input	Continuous forward current	I _F	50
	Peak forward current	I _{FP}	1
	Reverse voltage	V _R	5
	Power dissipation	P _{in}	100
	Derate linearly from 25°C	-	1.3
Output	Breakdown voltage	V _B	400
	Continuous load current	I _L	130
	Power dissipation	P _{out}	500
Isolation voltage		V _{iso}	KAQW414S 1500Vrms
Isolation resistance (Vio=500V)		R _{iso}	≥ 10 ¹⁰ 5000Vrms
Total power dissipation		P _t	550
Derate linearly from 25°C		-	2.5
Operating temperature		T _{opr}	-40 to +85
Storage temperature		T _{stg}	-40 to +125
Junction temperature		T _j	100
Soldering temperature 10seconds		T _{sot}	260

● Electro-optical Characteristics

(Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Input	Forward voltage	V _F	I _F =10mA	-	1.2	1.5
	Operation input current	I _{FOFF}	V _L =20V, I _L ≤5μA	-	-	3.0
	Recovery input current	I _{FON}	V _L =20V, I _L =100mA	0.2	-	-
Output	Breakdown voltage	V _B	I _B =50μA, I _F =10mA	400	-	-
	Off-state leakage current	I _{LEAK}	V _L =100V, I _F =5mA	-	1.0	2.0
I/O capacitance		C _{iso}	V _B =0V, f=1MHz	-	6	-
ON resistance		R _{ON}	I _F =0mA, I _L =100mA	-	25	50
Reverse (ON) time		T _{ON}	I _F =10mA, V _L =20V	-	0.6	1.5
Operate (OFF) time		T _{OFF}	I _L =100mA, t=10ms	-	0.3	1.0

● Turn-on / Turn-off Time

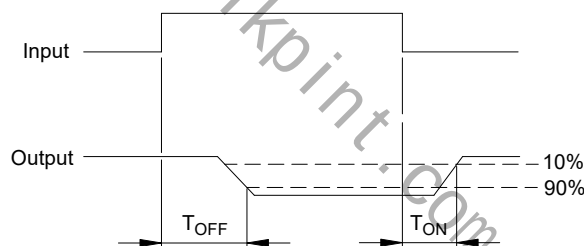

KAQW414 Series

8PIN 400V N.C. TYPE
SOLID STATE RELAY-MOSFET OUTPUT

● Schematic and Wiring Diagrams

Schematic	Output Configuration	Load	Connection	Wiring Diagrams
	2b	AC DC	-	(1) Two independent 1 Form B use (2) 2 Form B use

KAQW414 Series

8PIN 400V N.C. TYPE
SOLID STATE RELAY-MOSFET OUTPUT

Fig.1 Load Current vs. Ambient Temperature

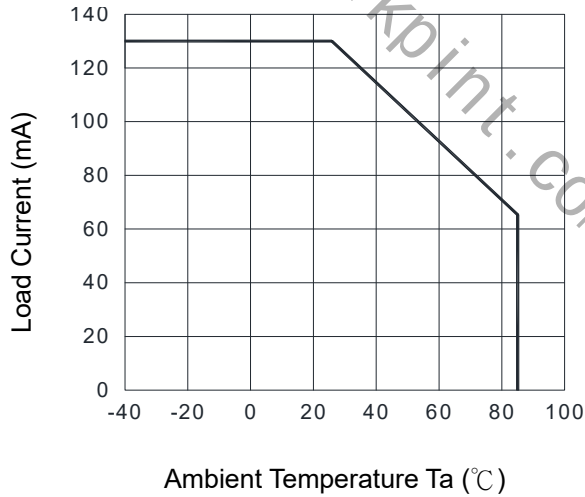


Fig.2 On Resistance vs. Ambient Temperature

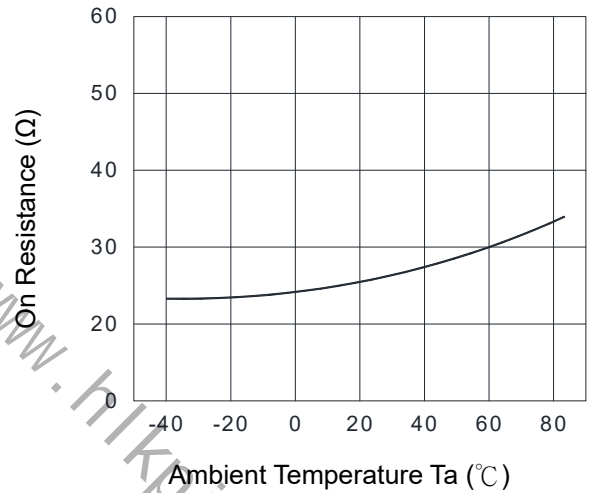


Fig.3 Operate (OFF) Time vs. Ambient Temperature

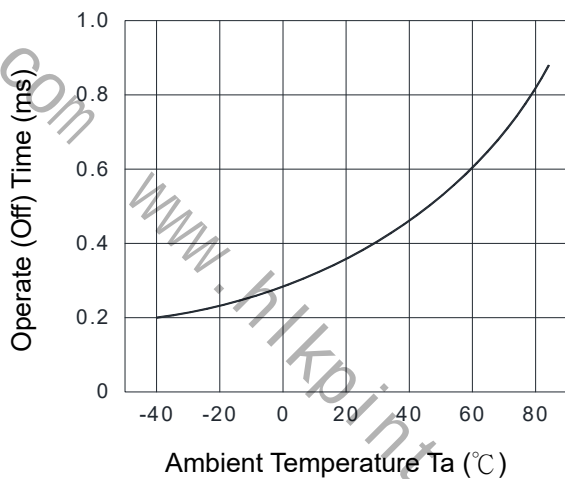


Fig.4 Reverse (ON) Time vs. Ambient Temperature

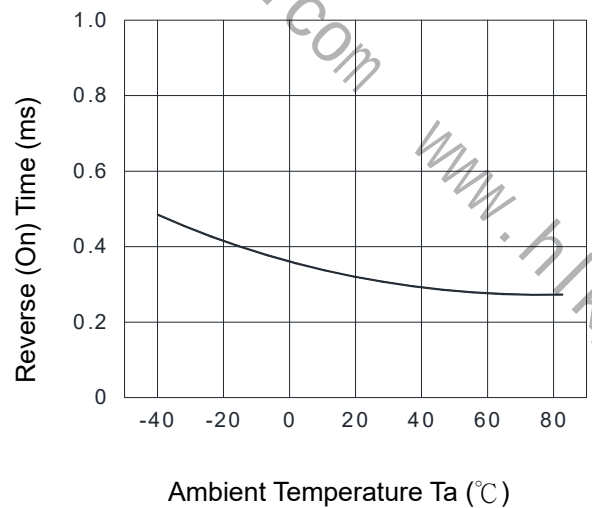


Fig.5 LED Operate Current vs. Ambient Temperature


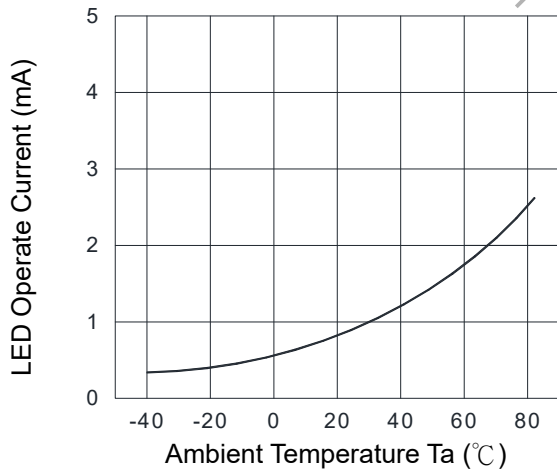


Fig.6 LED Turn-off Current vs. Ambient Temperature

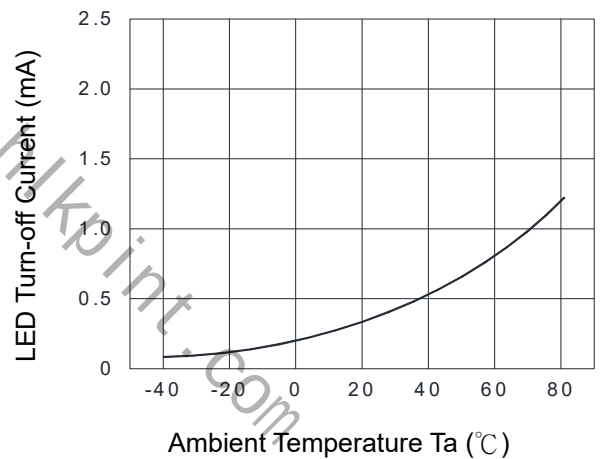

KAQW414 Series

8PIN 400V N.C. TYPE

SOLID STATE RELAY-MOSFET OUTPUT

Fig.7 LED Dropout Voltage vs. Ambient Temperature

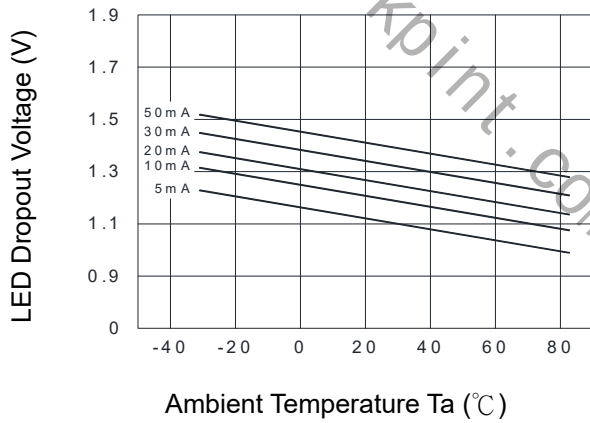


Fig.8 Voltage vs. Current Characteristics of Output at MOSFET Portion

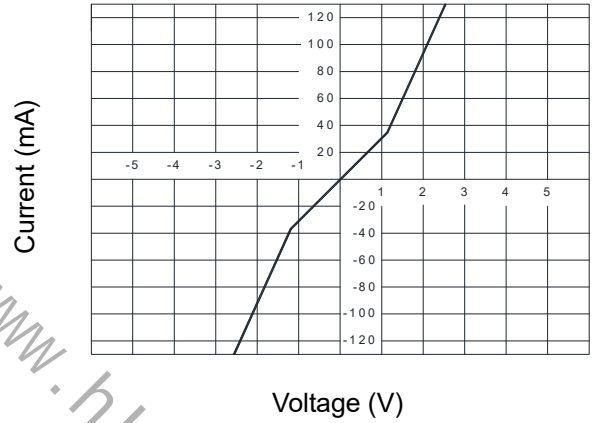


Fig.9 Operate (OFF) Time vs. LED Forward Current

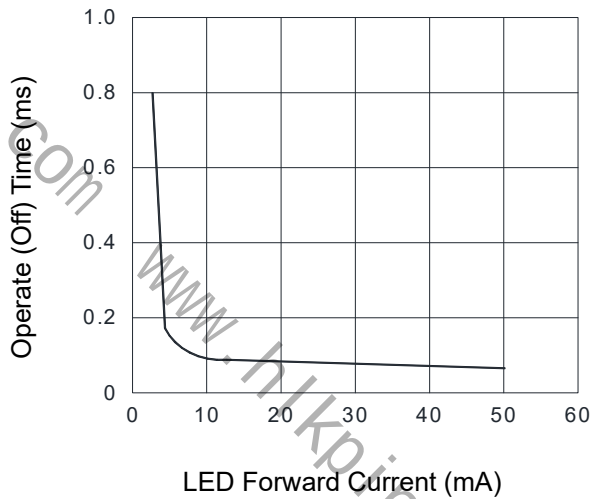


Fig.10 Off-state Leakage Current vs. Load Voltage

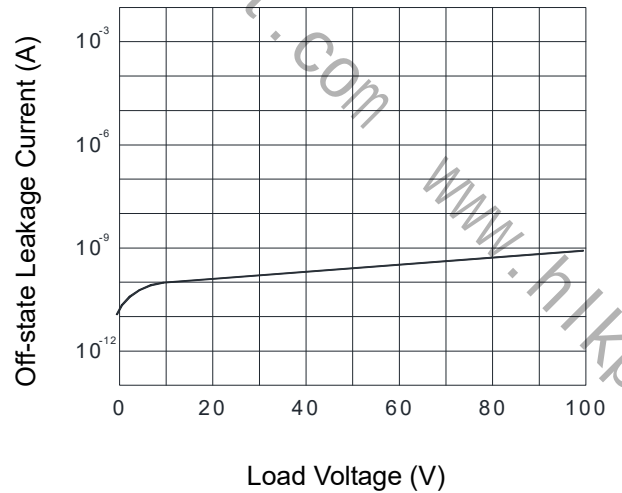


Fig.11 Reverse (ON) Time vs. LED Forward Current


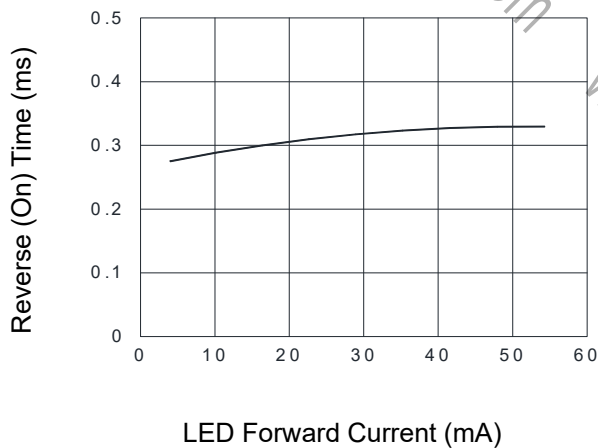


Fig.12 Output Capacitance vs. Applied Voltage

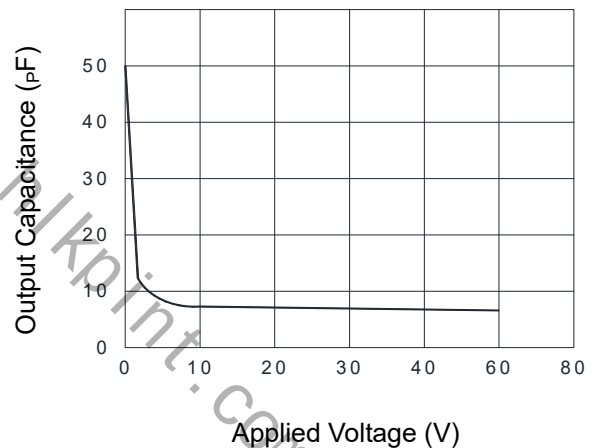


KAQW414 Series

8PIN 400V N.C. TYPE
SOLID STATE RELAY-MOSFET OUTPUT


● Using Methods

Examples of resistance value to control LED forward current ($I_F=5\text{mA}$)


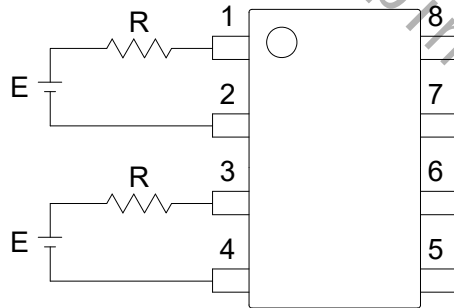


E	R
3.3V	Approx. 330 Ω
5V	Approx. 640 Ω
12V	Approx. 1.9K Ω
15V	Approx. 2.5K Ω
24V	Approx. 4.1K Ω

1. LED forward current must be more than 5mA , at E min.
2. LED forward current must be less than 50mA , at E max.

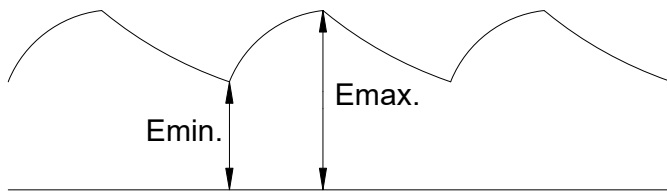

Regulate the spike voltage generated on the inductive load as follows :

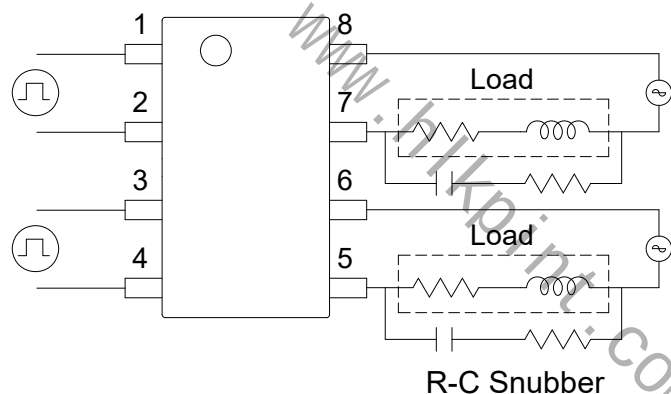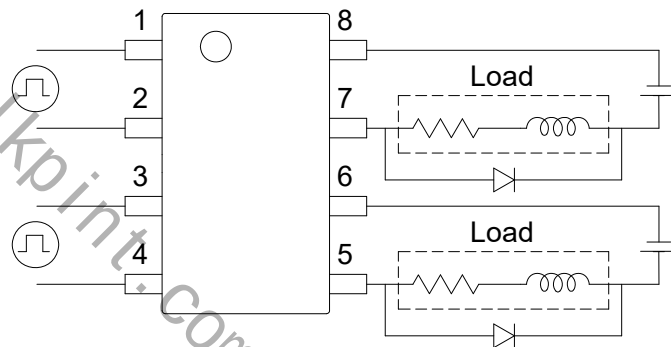

KAQW414 Series


8PIN 400V N.C. TYPE
SOLID STATE RELAY-MOSFET OUTPUT

● Recommended Soldering Conditions

(a) Infrared reflow soldering :

- Peak reflow soldering : 260°C or below (package surface temperature)
- Time of peak reflow temperature: 10 sec
- Time of temperature higher than 230°C : 30-60 sec
- Time to preheat temperature from 180~190°C : 60-120 sec
- Number of reflows : Two
- Flux : Rosin flux containing small amount of chlorine (The flux with a maximum chlorine content of 0.2 Wt% is recommended.)

Recommended Temperature Profile of Infrared Reflow

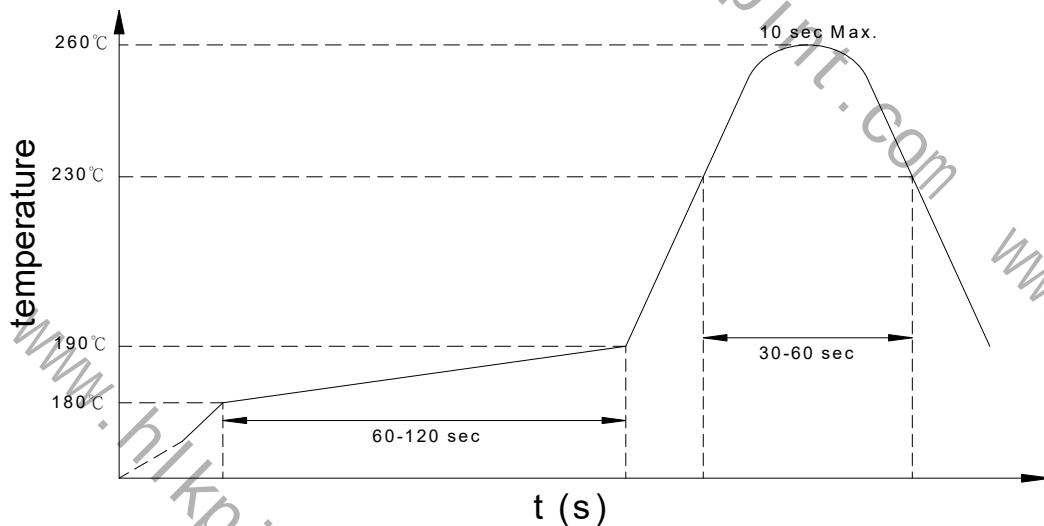

(b) Wave soldering :

- Temperature : 260°C or below (molten solder temperature)
- Time : 10 seconds or less
- Preheating conditions: 120°C or below (package surface temperature)
- Number of times : One
- Flux : Rosin flux containing small amount of chlorine (The flux with a maximum chlorine content of 0.2 Wt% is recommended.)

(c) Cautions :

- Fluxes : Avoid removing the residual flux with freon-based and chlorine-based cleaning solvent.
- Avoid shorting between portion of frame and leads.

KAQW414 Series

8PIN 400V N.C. TYPE
SOLID STATE RELAY-MOSFET OUTPUT

● Numbering System

KAQW414 X (Y)

Note :

KAQW414 = Part No.

X = Lead form option (blank 、 S or A)


Y = Tape and reel option (TL 、 TR)

Option	Description	Packing quantity
A (TL)	surface mount type package + TL tape & reel option	1000 units per reel
A (TR)	surface mount type package + TR tape & reel option	1000 units per reel
S (TL)	small outline for surface mount type package + TL tape & reel option	2000 units per reel
S (TR)	small outline for surface mount type package + TR tape & reel option	2000 units per reel

● Recommended Pad Layout for Surface Mount Lead Form


1. Surface mount type.

8-pin SMD

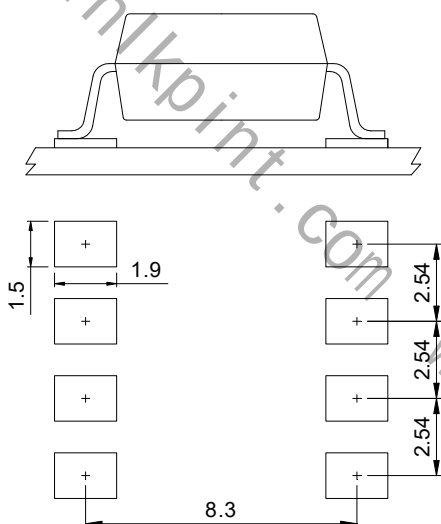

2. Small outline for surface mount type.

8-pin SOP

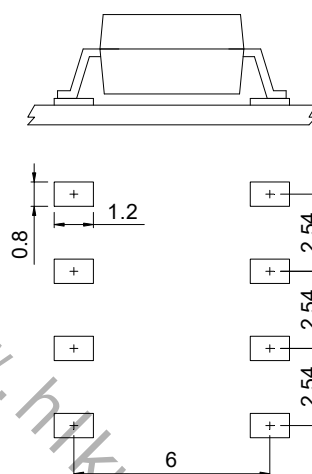


Unit : mm

KAQW414 Series

8PIN 400V N.C. TYPE
SOLID STATE RELAY-MOSFET OUTPUT

● 8-pin SMD Carrier Tape & Reel





Unit : mm

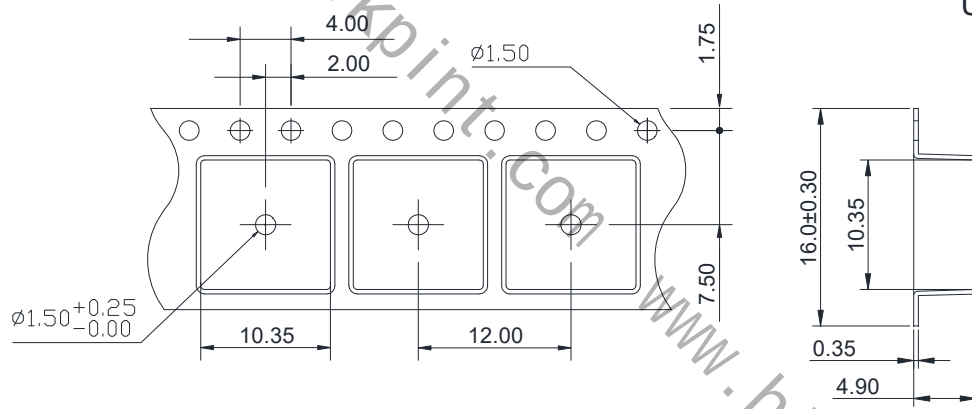

TOLERANCE : $\pm 0.2\text{mm}$

TL



TR

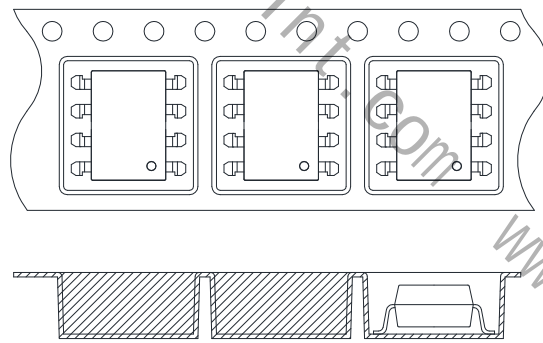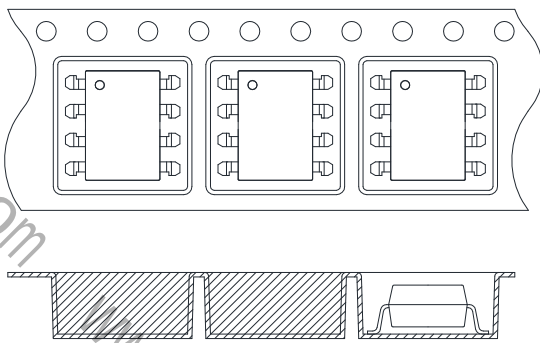

Direction of feed from reel




Direction of feed from reel

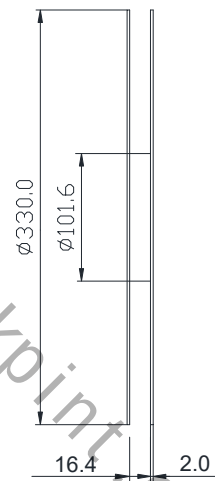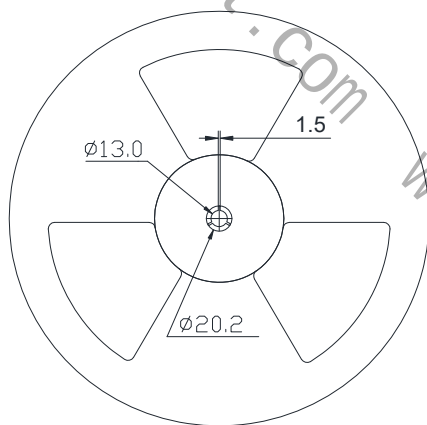

KAQW414 Series





8PIN 400V N.C. TYPE
SOLID STATE RELAY-MOSFET OUTPUT

● 8-pin SOP Carrier Tape & Reel

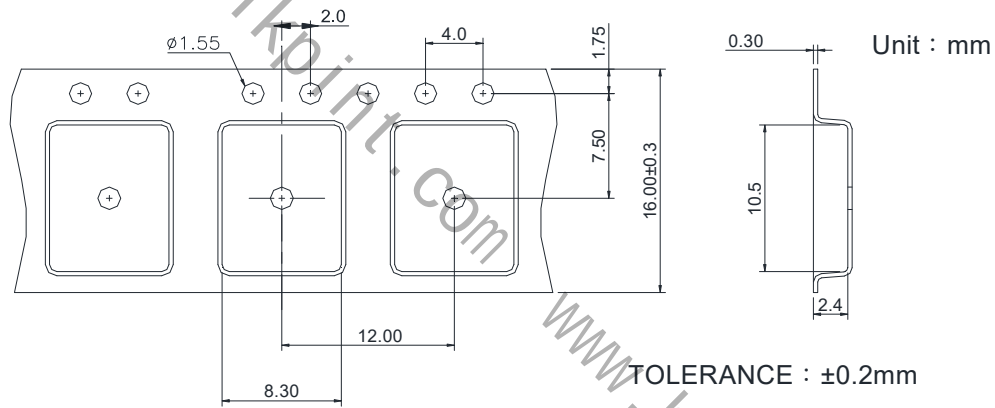

TL

TR

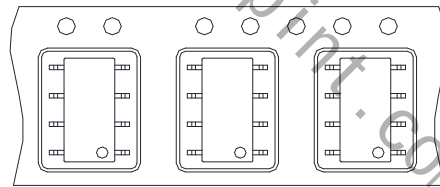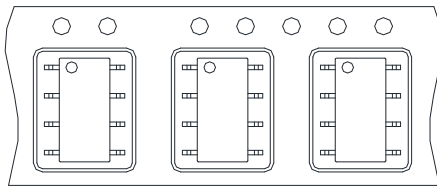

Direction of feed from reel

Direction of feed from reel

