


KAQW614 Series

8PIN 400V N.O.+ N.C. TYPE
SOLID STATE RELAY-MOSFET OUTPUT


● Description

The KAQW614 series contains two independent 1 Form A and 1 Form B SPST relays. The relay is constructed using a GaAlAs LED for actuation control and an integrated monolithic dies for the switch output. The die, fabricated in a high-voltage dielectrically isolated technology, is comprised of a photodiode array, switch control circuitry and MOSFET switches.

● Schematic

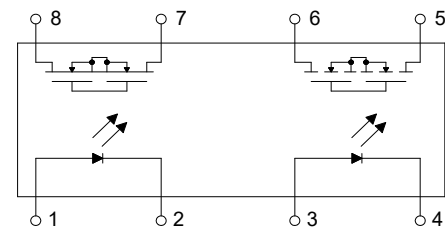

1 FORM A/B
1 FORM C



● Features

1. Normally open and close, single pole single throw
2. Control 400V AC or DC voltage
3. Switch 130mA loads
4. Controls low-level analog signals
5. High sensitivity, low ON resistance
6. Low-level off-state leakage current
7. High isolation voltage 5KV (DIP / SMD)
8. Pb free and RoHS compliant
9. MSL class 1
10. Agency Approvals :
 - UL Approved (No. E108430): UL508
 - c-UL Approved (No. E108430)
 - FIMKO Approved: EN62368-1, EN60601-1
 - VDE Approved (No. 40053989): EN60747-5-5

● Application

- Telecommunications (PC, electronic notepad)
- Modem
- Telephone equipment
- Security equipment
- Sensors
- Measuring and testing equipment
- Factory automation equipment
- High speed inspection machines


KAQW614 Series

8PIN 400V N.O.+ N.C. TYPE
SOLID STATE RELAY-MOSFET OUTPUT


● Outside Dimension

Unit : mm


1. Dual-in-line type.

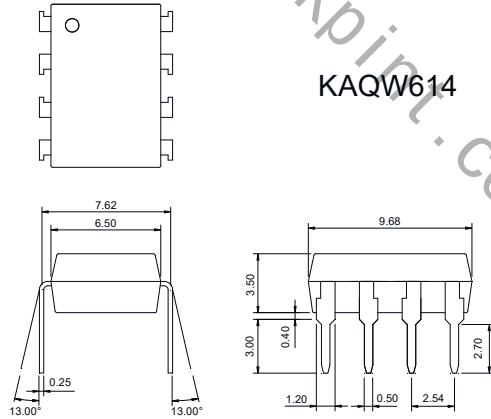

2. Surface mount type.

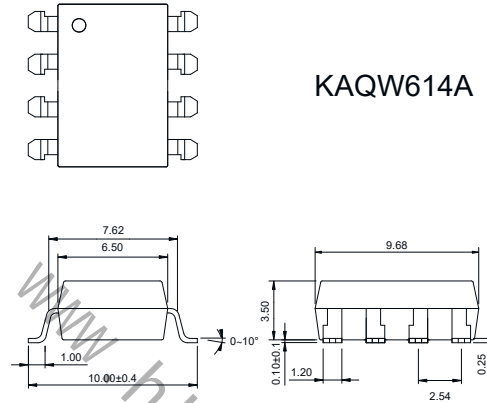


3. Small outline for surface mount type.

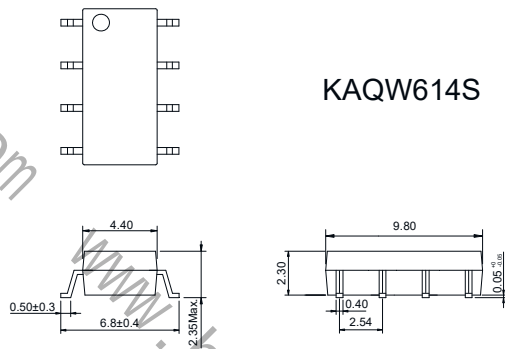

TOLERANCE : ±0.2mm

● Device Marking

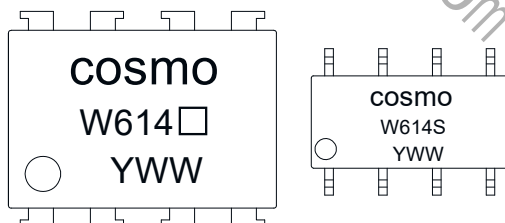

Notes :

cosmo

W614□

W614S

YWW

□(Blank): DIP or SMD

S : SOP

Y : Year code / W : Week code

KAQW614 Series

8PIN 400V N.O.+ N.C. TYPE
SOLID STATE RELAY-MOSFET OUTPUT

● Absolute Maximum Ratings

(Ta=25°C)

Item		Symbol	Rating	Unit
Input	Continuous forward current	I_F	50	mA
	Peak forward current	I_{FP}	1	A
	Reverse voltage	V_R	5	V
	Power dissipation	P_{in}	100	mW
	Derate linearly from 25°C	-	1.3	mW/°C
Output	Breakdown voltage	V_B	400	V
	Continuous load current	I_L	130	mA
	Power dissipation	P_{out}	500	mW
Isolation voltage		V_{iso}	KAQW614S	KAQW614
			1500Vrms	5000Vrms
Isolation resistance ($V_{io}=500V$)		R_{iso}	$\geq 10^{10}$	Ω
Total power dissipation		P_t	550	mW
Derate linearly from 25°C		-	2.5	mW/°C
Operating temperature		T_{opr}	-40 to +85	°C
Storage temperature		T_{stg}	-40 to +125	°C
Junction temperature		T_j	100	°C
Soldering temperature 10 seconds		T_{sot}	260	°C

● Electro-optical Characteristics


(Ta=25°C)

Parameter		Symbol	Conditions	Min.	Typ.	Max.	Unit
Input	Forward voltage	V_F	$I_F=10mA$	-	1.2	1.5	V
	Operation input current	I_{FON} (N.O)	$V_L=20V, I_L=100mA$ (N.O)	-	-	3.0	mA
		I_{FOFF} (N.C)	$V_L=20V, I_L \leq 5\mu A$ (N.C)	-	-	-	mA
	Recovery input current	I_{FOFF} (N.O) I_{FON} (N.C)	$V_L=20V, I_L \leq 5\mu A$ (N.O) $V_L=20V, I_L=100mA$ (N.C)	0.2	-	-	mA
Output	Breakdown voltage	V_B	$I_B=50\mu A, I_F=0mA$ (N.O) $I_B=50\mu A, I_F=10mA$ (N.C)	400	-	-	V
	Off-state leakage current	I_{LEAK}	$V_L=400V, I_F=0mA$ (N.O) $V_L=100V, I_F=5mA$ (N.C)	-	0.2 1.0	1.0 2.0	μA
I/O capacitance		C_{iso}	$V_B=0V, f=1MHz$	-	6	-	pF
ON resistance		R_{ON}	$I_F=10mA, I_L=100mA$ (N.O) $I_F=0mA, I_L=100mA$ (N.C)	-	20 25	30 50	Ω
Operate (OFF) time		T_{ON} (N.O) T_{OFF} (N.C)	$I_F=10mA, V_L=20V$ $I_L=100mA, t=10ms$	-	0.3 0.6	1.0 1.5	ms
Reverse (ON) time		T_{OFF} (N.O) T_{ON} (N.C)			0.1 0.3	1.5 1.0	ms

KAQW614 Series

8PIN 400V N.O.+ N.C. TYPE
SOLID STATE RELAY-MOSFET OUTPUT

● Turn-on / Turn-off time

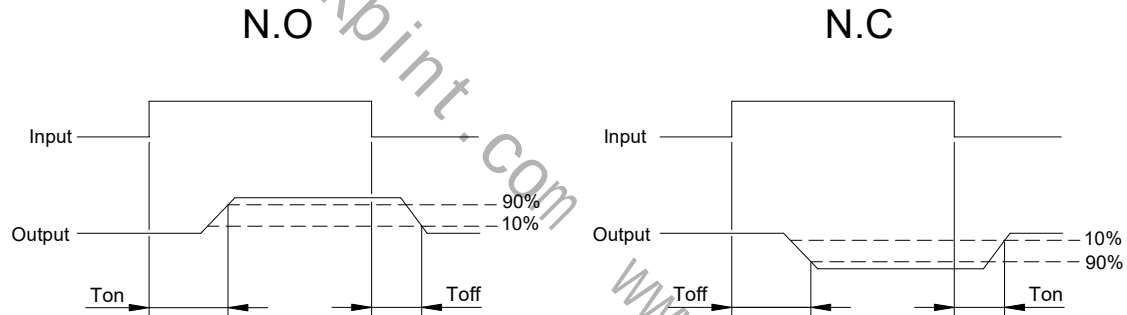

● Schematic and Wiring Diagrams

Schematic	Output Configuration	Load	Connection	Wiring Diagrams
	1a + 1b	AC DC	-	(1) Two independent 1 Form A & 1 Form B use (2) 1 Form A & 1 Form B use

KAQW614 Series

8PIN 400V N.O.+ N.C. TYPE
SOLID STATE RELAY-MOSFET OUTPUT

Fig.1 Load Current vs. Ambient Temperature

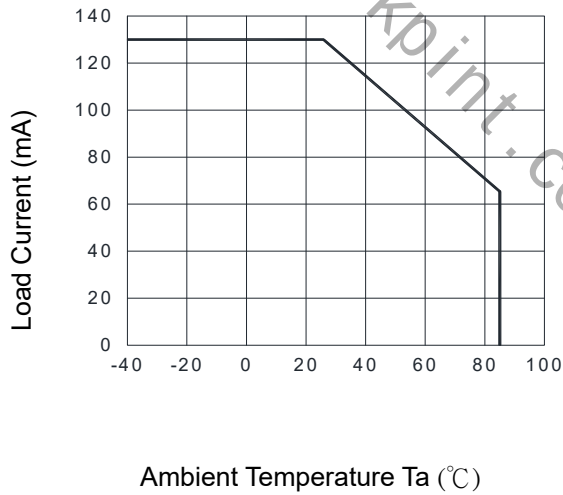


Fig.2 On Resistance vs. Ambient Temperature

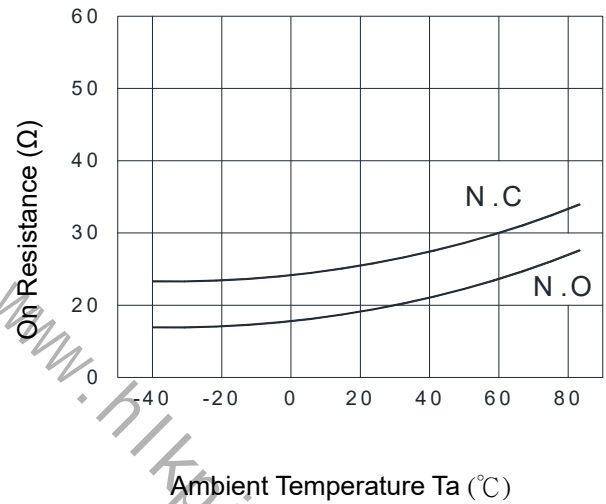


Fig.3 Operate (OFF) Time vs. Ambient Temperature

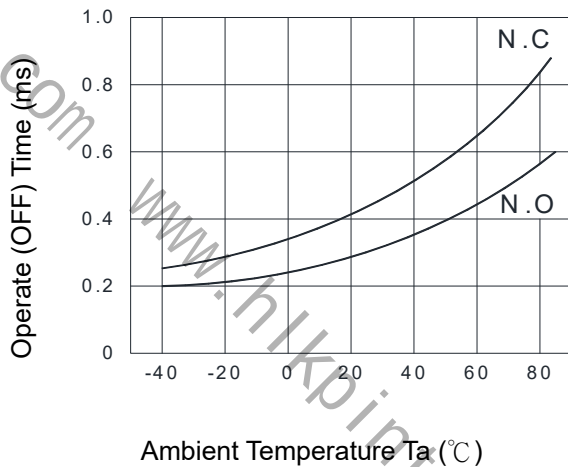


Fig.4 Reverse (ON) Time vs. Ambient Temperature

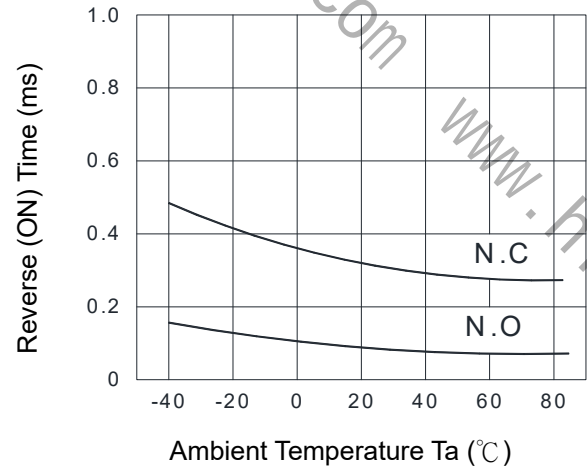


Fig.5 LED Operate (OFF) Current vs. Ambient Temperature


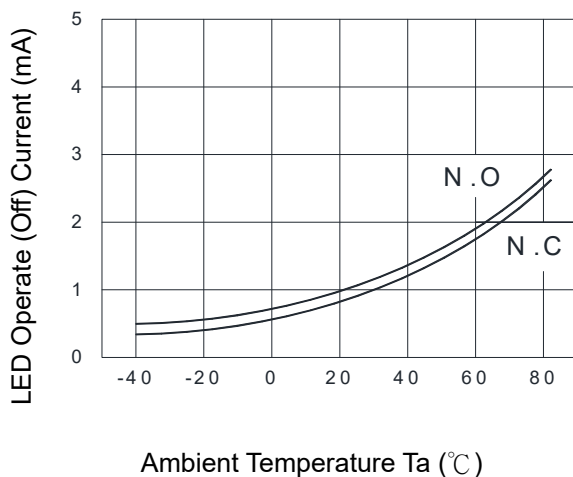


Fig.6 LED Reverse (ON) Current vs. Ambient Temperature

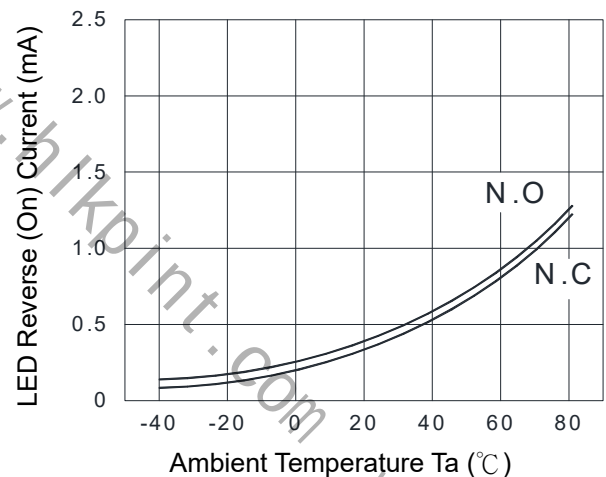

KAQW614 Series

8PIN 400V N.O.+ N.C. TYPE
SOLID STATE RELAY-MOSFET OUTPUT

Fig.7 LED Dropout Voltage vs. Ambient Temperature

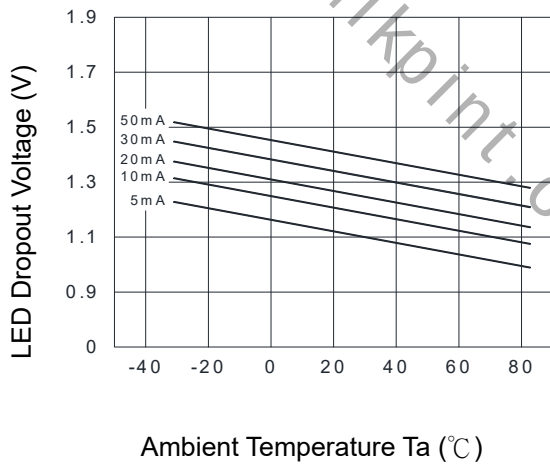


Fig.8 Voltage vs. Current Characteristics of Output at MOSFET Portion

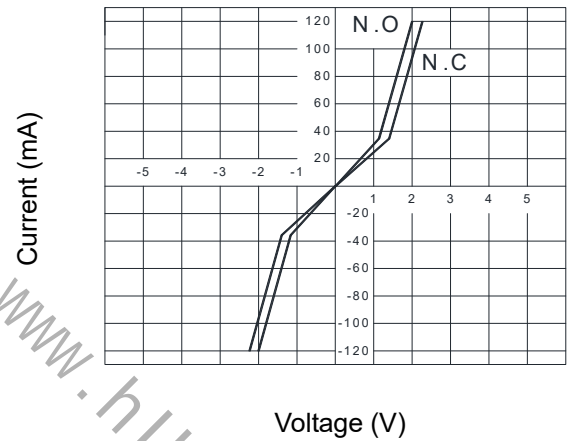


Fig.9 Operate (OFF) Time vs. LED Forward Current

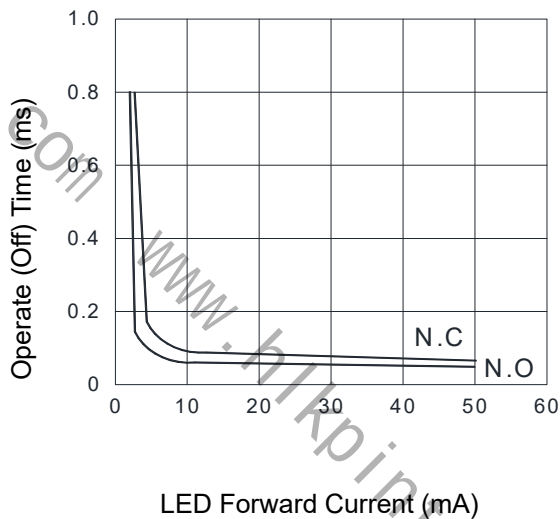


Fig.10 Off-state Leakage Current vs. Load Voltage

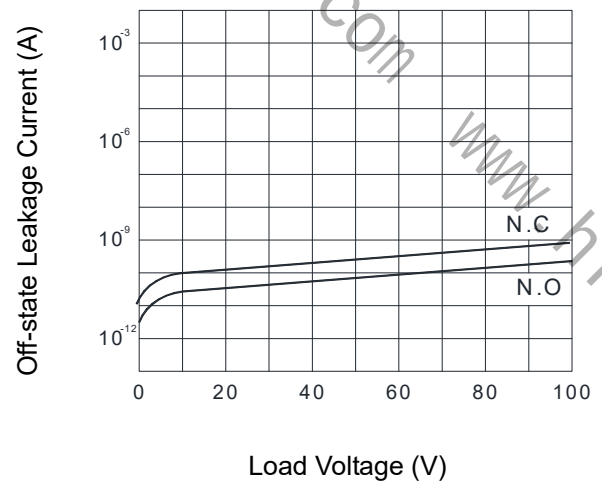


Fig.11 Reverse (ON) Time vs. LED Forward Current


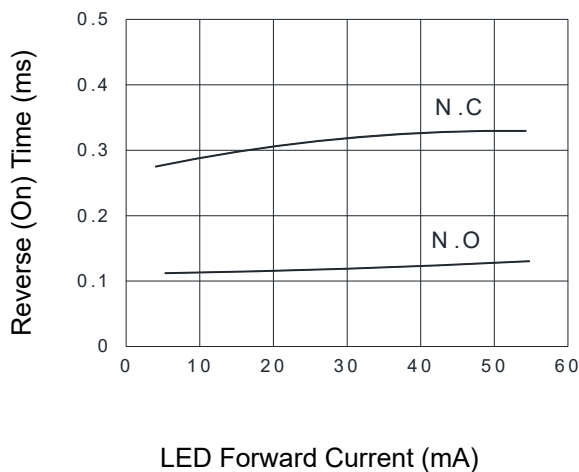


Fig.12 Output Capacitance vs. Applied Voltage

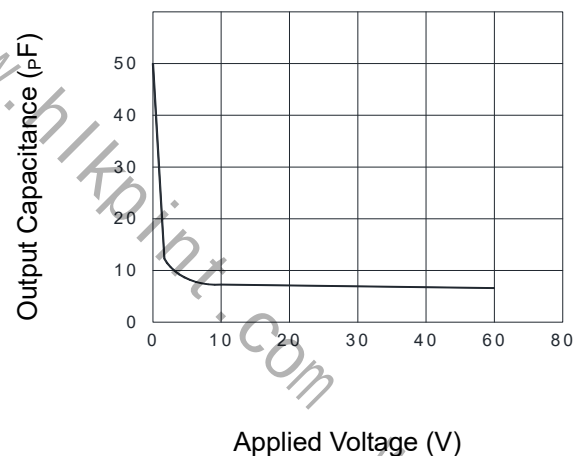


KAQW614 Series

8PIN 400V N.O.+ N.C. TYPE
SOLID STATE RELAY-MOSFET OUTPUT


● Using Methods

Examples of resistance value to control LED forward current ($I_F=5\text{mA}$)


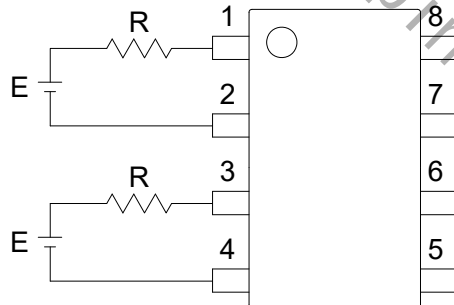


E	R
3.3V	Approx. 330 Ω
5V	Approx. 640 Ω
12V	Approx. 1.9K Ω
15V	Approx. 2.5K Ω
24V	Approx. 4.1K Ω

1. LED forward current must be more than 5mA , at E min.
2. LED forward current must be less than 50mA , at E max.

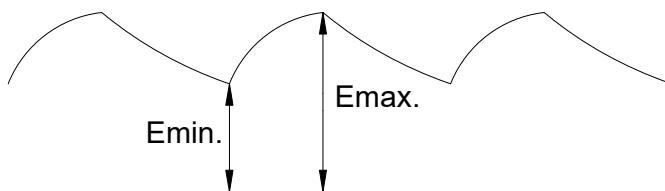

Regulate the spike voltage generated on the inductive load as follows :

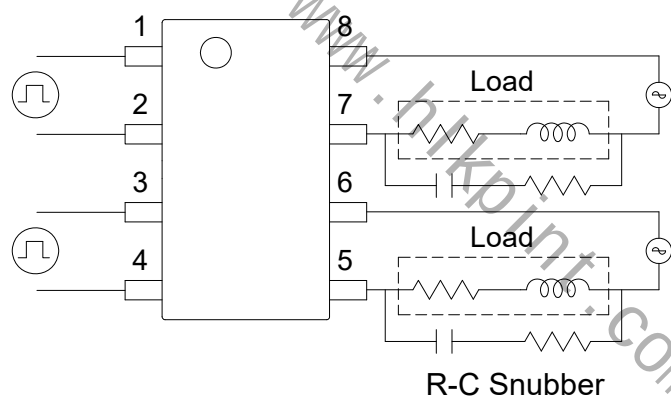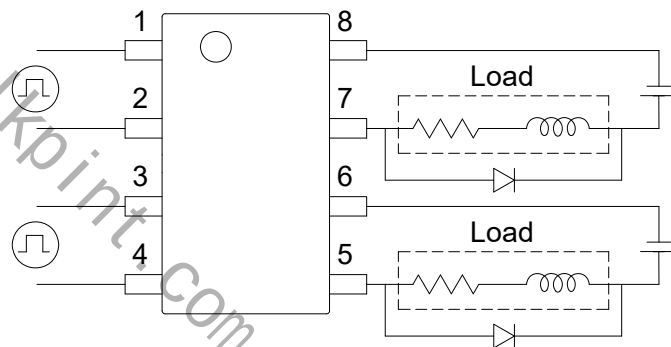


● **Recommended Soldering Conditions**

(a) Infrared reflow soldering :

- Peak reflow soldering : 260°C or below (package surface temperature)
- Time of peak reflow temperature: 10 sec
- Time of temperature higher than 230°C : 30-60 sec
- Time to preheat temperature from 180~190°C : 60-120 sec
- Number of reflows : Two
- Flux : Rosin flux containing small amount of chlorine
(The flux with a maximum chlorine content of 0.2 Wt% is recommended.)

Recommended Temperature Profile of Infrared Reflow

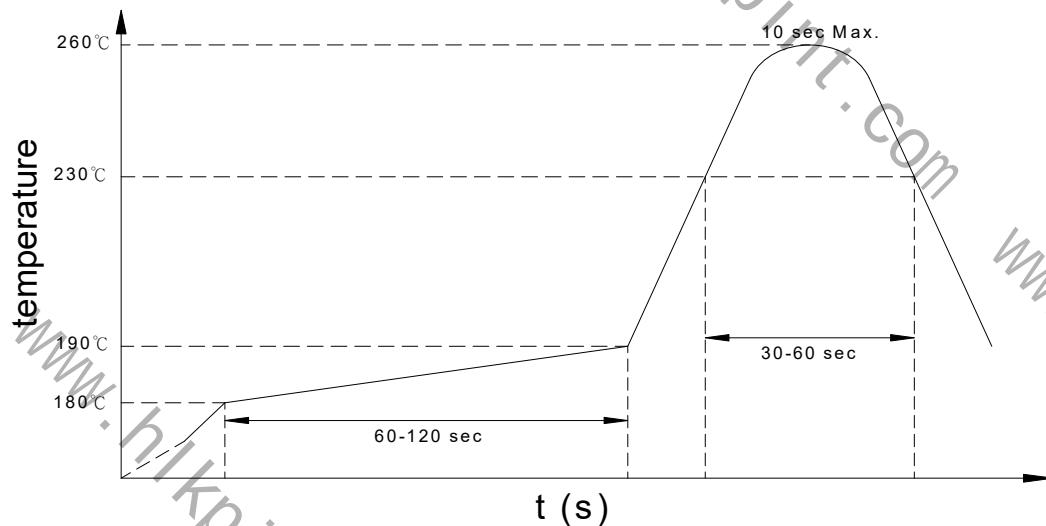

(b) Wave soldering :

- Temperature : 260°C or below (molten solder temperature)
- Time : 10 seconds or less
- Preheating conditions: 120°C or below (package surface temperature)
- Number of times : One
- Flux : Rosin flux containing small amount of chlorine (The flux with a maximum chlorine content of 0.2 Wt% is recommended.)

(c) Cautions :

- Fluxes : Avoid removing the residual flux with freon-based and chlorine-based cleaning solvent.
- Avoid shorting between portion of frame and leads.

KAQW614 Series

8PIN 400V N.O.+ N.C. TYPE
SOLID STATE RELAY-MOSFET OUTPUT

● Numbering System

KAQW614 X (Y)

Note :

KAQW614 = Part No.

X = Lead form option (blank 、 S or A)


Y = Tape and reel option (TL 、 TR)

Option	Description	Packing quantity
A (TL)	surface mount type package + TL tape & reel option	1000 units per reel
A (TR)	surface mount type package + TR tape & reel option	1000 units per reel
S (TL)	small outline for surface mount type package + TL tape & reel option	2000 units per reel
S (TR)	small outline for surface mount type package + TR tape & reel option	2000 units per reel

● Recommended Pad Layout for Surface Mount Lead Form


1. Surface mount type.

8-pin SMD

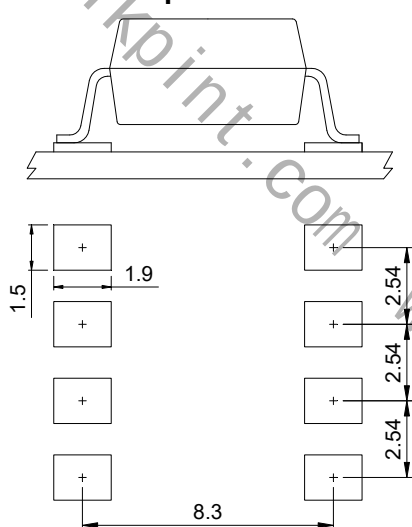

2. Small outline for surface mount type.

8-pin SOP

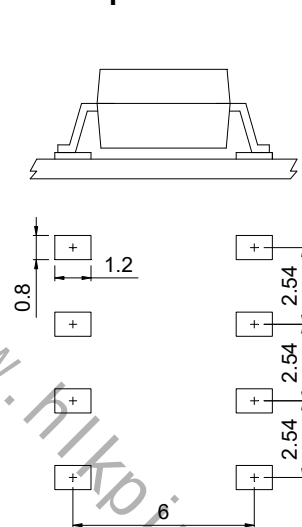


Unit : mm

KAQW614 Series

8PIN 400V N.O.+ N.C. TYPE
SOLID STATE RELAY-MOSFET OUTPUT

● 8-pin SMD Carrier Tape & Reel





Unit : mm

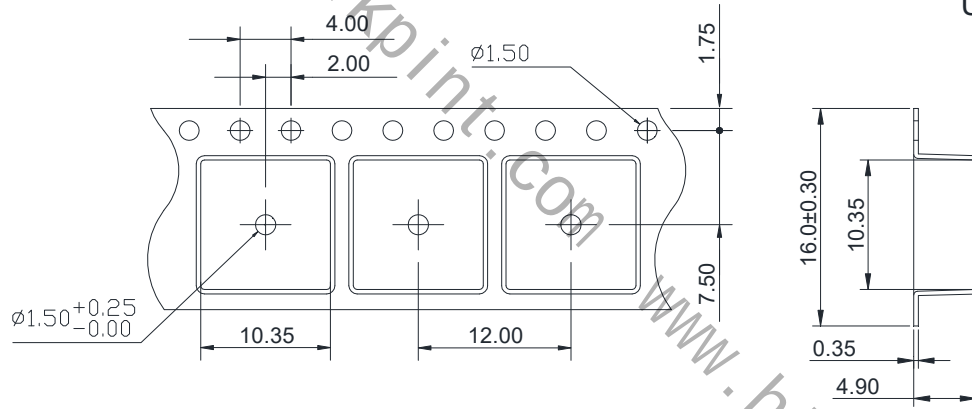

TOLERANCE : $\pm 0.2\text{mm}$

TL



TR

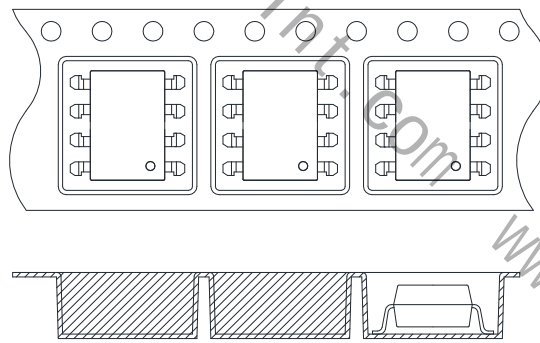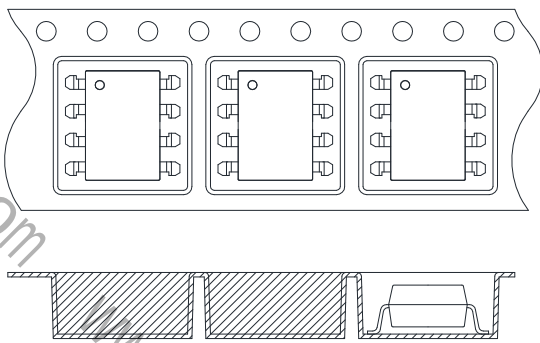

Direction of feed from reel




Direction of feed from reel

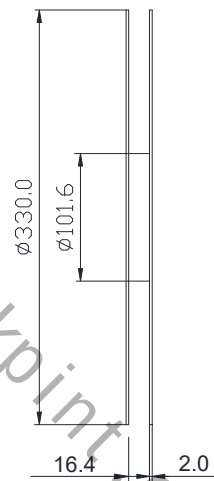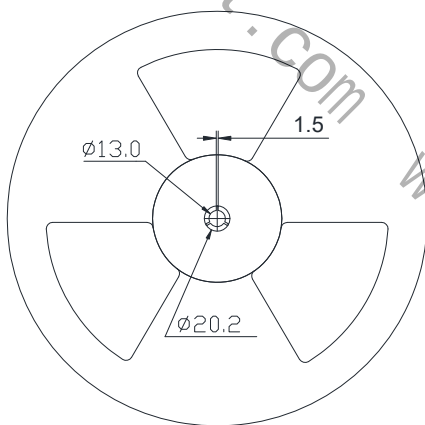

KAQW614 Series




8PIN 400V N.O.+ N.C. TYPE
SOLID STATE RELAY-MOSFET OUTPUT

● 8-pin SOP Carrier Tape & Reel

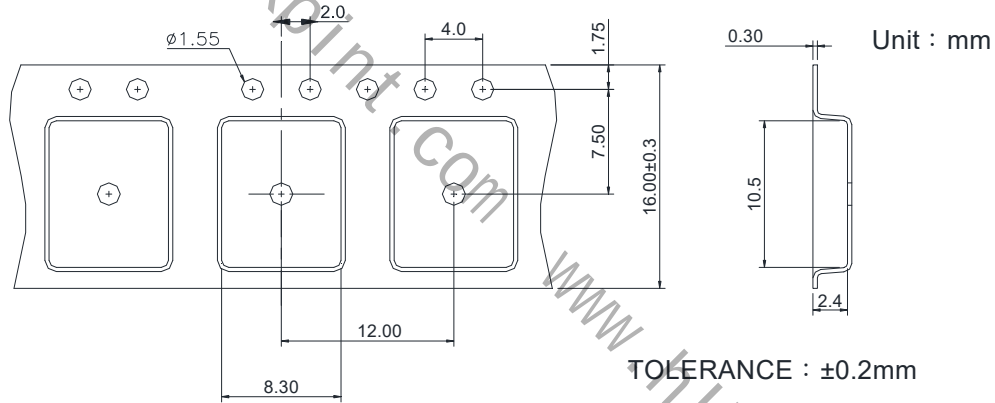

TL

TR

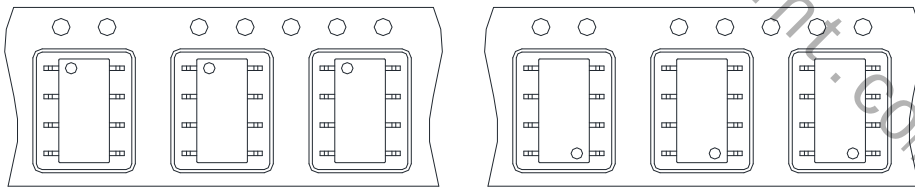

Direction of feed from reel

Direction of feed from reel

