


KAQY212G Series

4PIN 60V N.O TYPE
SOLID STATE RELAY-MOSFET OUTPUT


● Description

The KAQY212G series is robust, ideal for telecom and ground fault applications. It is a SPST normally open switch (1 Form A) that replaces electromechanical relays in many applications. It is constructed using a GaAlAs LED for actuation control and an integrated monolithic die for the switch output. The die, fabricated in a high-voltage dielectrically isolated technology, is comprised of a photodiode array, switch control circuitry and MOSFET switches.

● Schematic



1 FORM A
NORMALLY OPEN



● Features

1. Normally open, single pole single throw
2. Control 60V AC or DC voltage
3. Switch 1A loads max.
4. Controls low-level analog signals
5. High sensitivity, low ON resistance
6. Low-level off-state leakage current
7. High isolation voltage 5KV (DIP / SMD)
8. Pb free and RoHS compliant
9. MSL class 1
10. Agency Approvals :
 - UL Approved
 - C-UL Approved
 - FIMKO Approved
 - VDE Approved

● Application

- Telecommunications (PC, electronic notepad)
- Modem
- Telephone equipment
- Security equipment
- Sensors
- Measuring and testing equipment
- Factory automation equipment
- High speed inspection machines


KAQY212G Series

4PIN 60V N.O TYPE
SOLID STATE RELAY-MOSFET OUTPUT


● Outside Dimension

Unit : mm


1. Dual-in-line type.

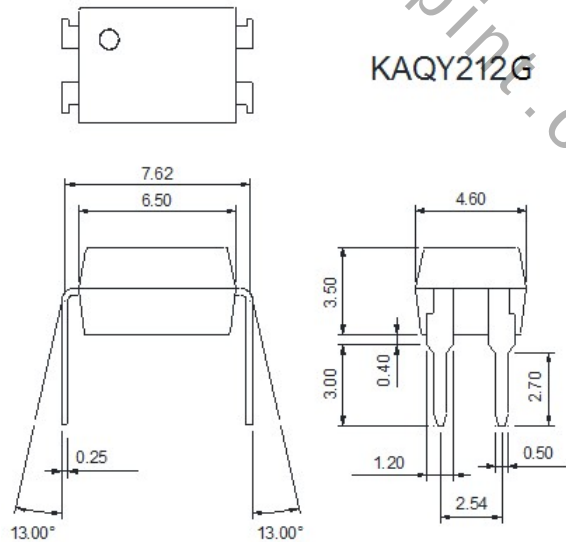

2. Surface mount type.

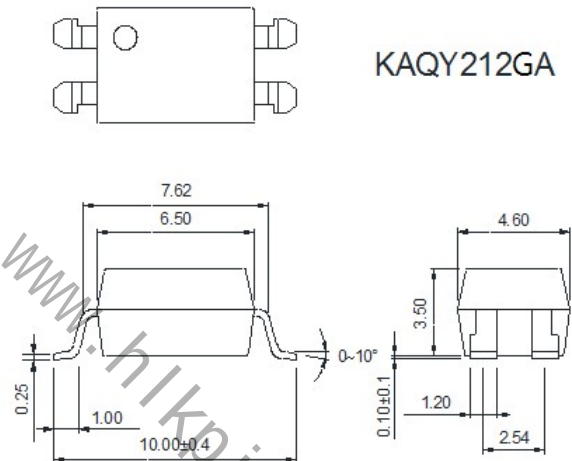


3. Small outline for surface mount type.

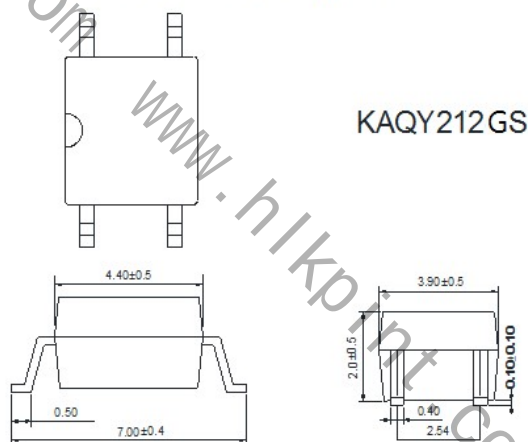

TOLERANCE : ±0.2mm

● Device Marking

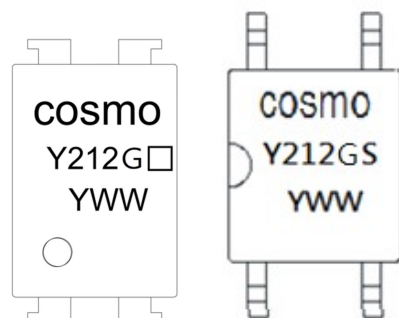

Notes :

cosmo

Y212G□ □ (Blank) : DIP or SMD

Y212GS S : SOP

YWW Y : Year code / W : Week code

KAQY212G Series

4PIN 60V N.O TYPE
SOLID STATE RELAY-MOSFET OUTPUT

● Absolute Maximum Ratings

(Ta=25°C)


Item		Symbol	Rating		Unit
Input	Continuous forward current	I_F	50		mA
	Peak forward current	I_{FP}	1		A
	Reverse voltage	V_R	5		V
	Power dissipation	P_{in}	50		mW
	Derate linearly from 25°C	-	1.3		mW/°C
Output	Breakdown voltage	V_B	60		V
	Continuous load current	I_L	1		A
	Power dissipation	P_{out}	400		mW
Isolation voltage		V_{iso}	KAQY212GS	KAQY212G	Vrms
			1500	5000	
Isolation resistance (Vio=500V)		R_{iso}	$\geq 10^{10}$		Ω
Total power dissipation		P_t	450		mW
Derate linearly from 25°C		-	4.5		mW/°C
Operating temperature		T_{opr}	-40 to +100		°C
Storage temperature		T_{stg}	-40 to +125		°C
Junction temperature		T_J	100		°C
Soldering temperature 10 seconds		T_{sot}	260		°C

● Electro-optical Characteristics

(Ta=25°C)

Parameter		Symbol	Conditions	Min.	Typ.	Max.	Unit
Input	Forward voltage	V_F	$I_F=10mA$	-	1.2	1.5	V
	Operation input current	I_{FON}	$V_L=20V, I_L=100mA$	-	-	3.0	mA
	Recovery input current	I_{FOFF}	$V_L=20V, I_L=100\mu A$	0.2	-	-	mA
Output	Breakdown voltage	V_B	$I_B=100\mu A$	60	-	-	V
	Off-state leakage current	I_{LEAK}	$V_L=60V, I_F=0mA$	-	0.1	1.0	μA
I/O capacitance		C_{iso}	$V_B=0V, f=1MHz$	-	6	-	pF
ON resistance		R_{ON}	$I_F=10mA, I_L=100mA$	-	0.2	0.7	Ω
Turn-on time		T_{ON}	$I_F=5mA, V_L=20V$	-	1.0	1.5	ms
Turn-off time		T_{OFF}	$I_L=100mA, t=10ms$	-	0.1	0.5	ms

● Turn-on / Turn-off Time

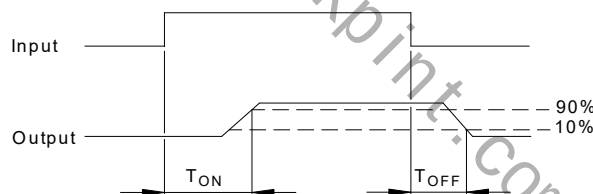



KAQY212G Series

4PIN 60V N.O TYPE
SOLID STATE RELAY-MOSFET OUTPUT

● Recommended operating conditions (Ambient temperature: 25°C)


Item	Symbol	Min.	Max.	Unit
Operation input current	IFon	3	20	mA
Breakdown voltage	VB	-	48	V
Continuous load current	IL	-	1.0	A

● Schematic and Wiring Diagrams

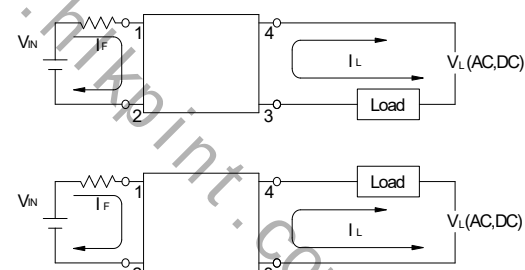Schematic	Output Configuration	Load	Connection	Wiring Diagrams
	1a	AC DC	-	


● Using Methods

Examples of resistance value to control LED forward current ($I_F=5\text{mA}$)

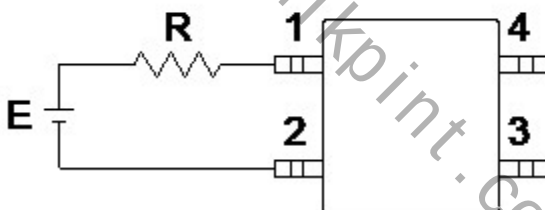

E	R
3.3V	Approx. 330 Ω
5V	Approx. 640 Ω
12V	Approx. 1.9K Ω
15V	Approx. 2.5K Ω
24V	Approx. 4.1K Ω

1. LED forward current must be more than 5mA , at E min.
2. LED forward current must be less than 50mA , at E max.


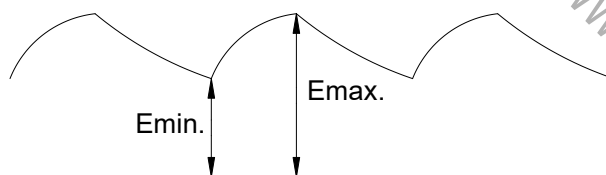


Regulate the spike voltage generated on the inductive load as follows :

KAQY212G Series

4PIN 60V N.O TYPE

SOLID STATE RELAY-MOSFET OUTPUT

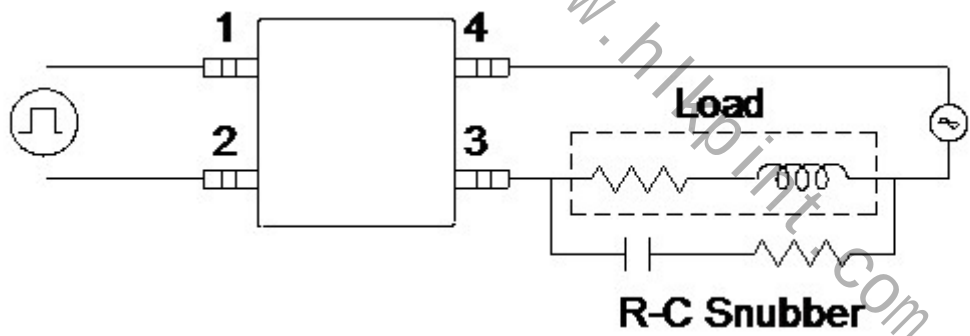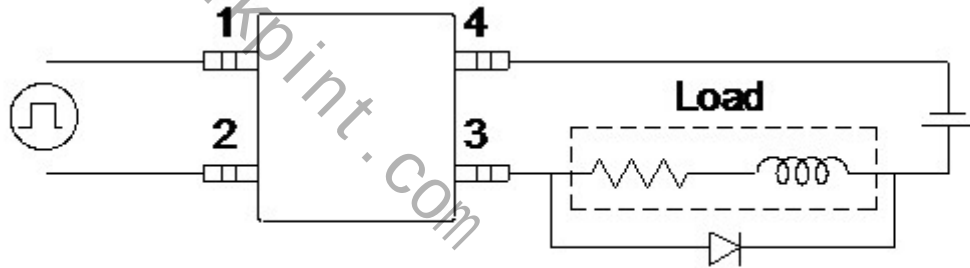

KAQY212G Series

4PIN 60V N.O TYPE

SOLID STATE RELAY-MOSFET OUTPUT

Fig 1. Load current vs Ambient Temperature

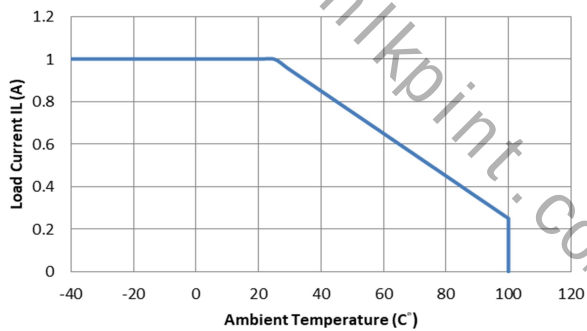


Fig 2. On Resistance vs Ambient Temperature

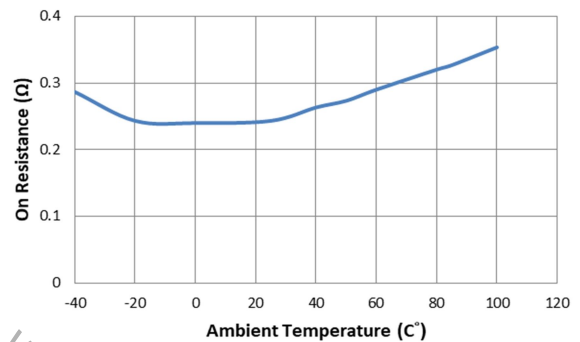


Fig 3. Turn on time vs Ambient Temperature

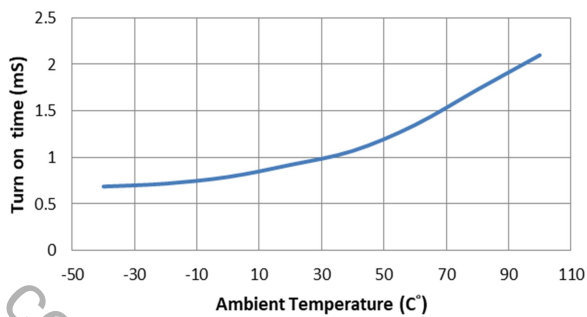


Fig 4. Turn off time vs Ambient Temperature

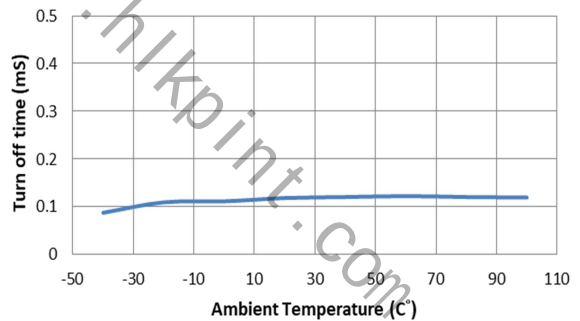


Fig 5. IFon vs Temperature

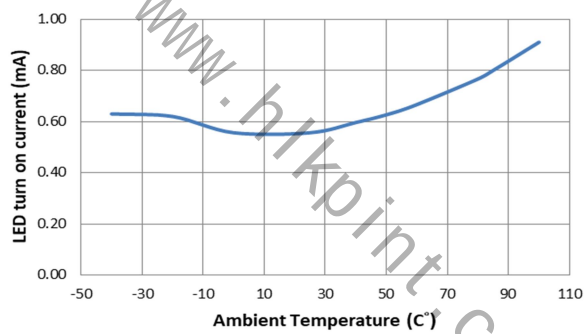


Fig 6. IFoff vs Temperature

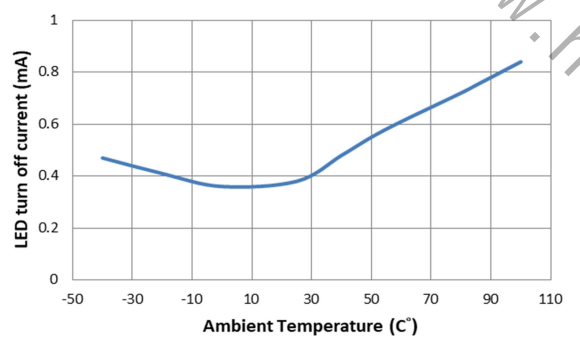


Fig 7. Forward voltage vs Ambient temperature


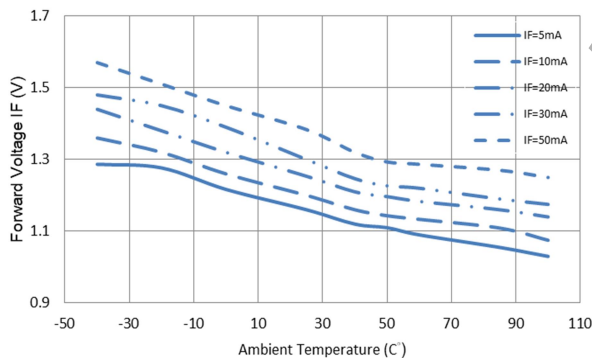


Fig 8. Load current vs Load voltage

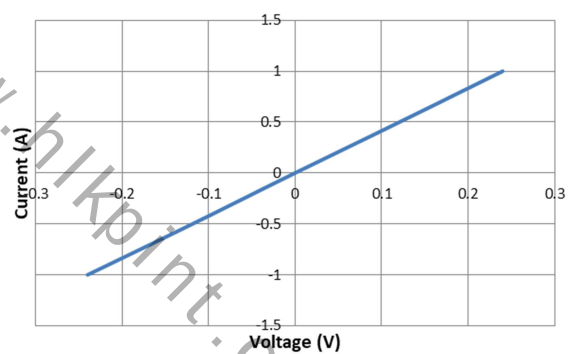

KAQY212G Series

4PIN 60V N.O TYPE

SOLID STATE RELAY-MOSFET OUTPUT

Fig 9. Off state leakage current vs load current

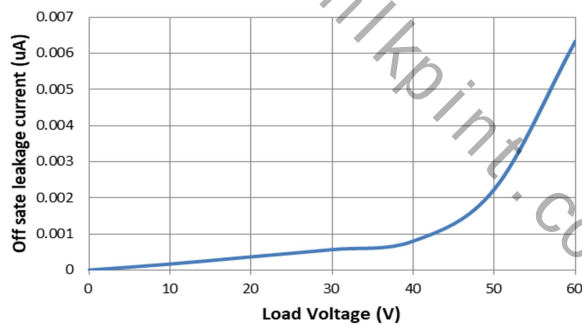


Fig 10. Turn on time vs IFon


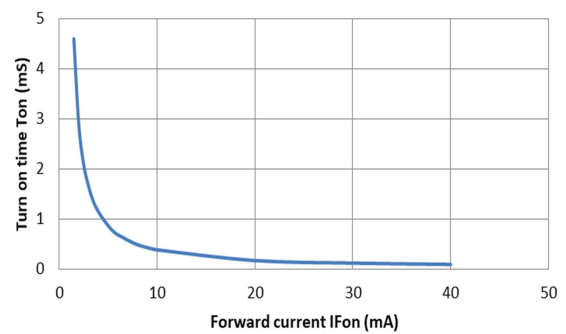


Fig 11. Turn off time vs IFon

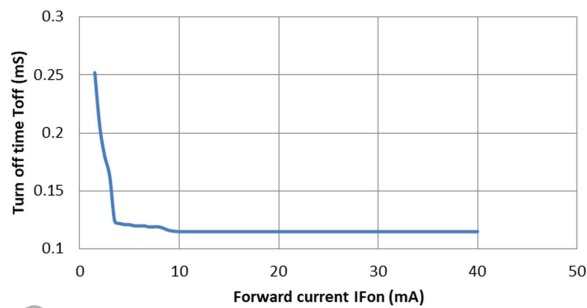

KAQY212G Series


4PIN 60V N.O TYPE
SOLID STATE RELAY-MOSFET OUTPUT

● Recommended Soldering Conditions

(a) Infrared reflow soldering :

- Peak reflow soldering : 260°C or below (package surface temperature)
- Time of peak reflow temperature: 10 sec
- Time of temperature higher than 230°C : 30-60 sec
- Time to preheat temperature from 180~190°C : 60-120 sec
- Number of reflows : Two
- Flux : Rosin flux containing small amount of chlorine (The flux with a maximum chlorine content of 0.2 Wt% is recommended.)

Recommended Temperature Profile of Infrared Reflow

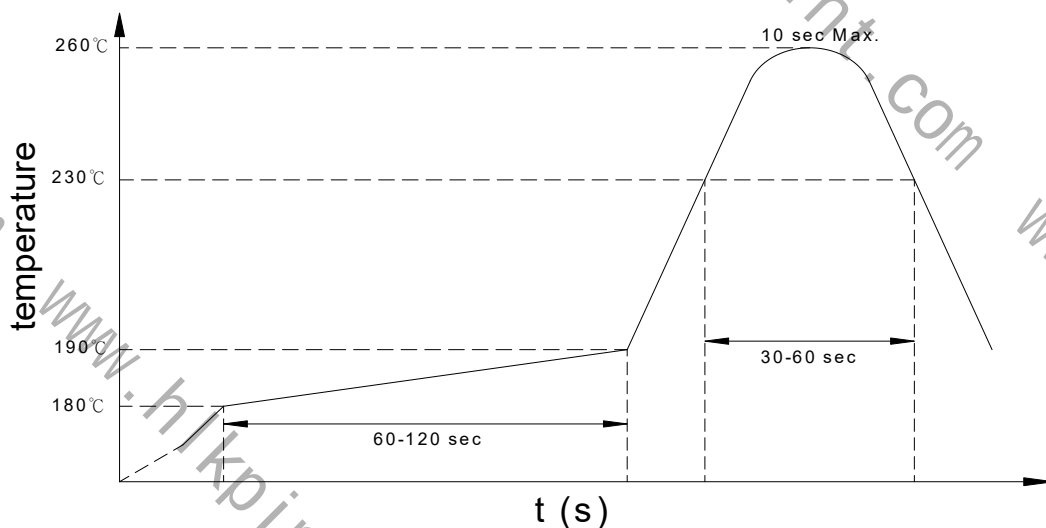

(b) Wave soldering :

- Temperature : 260°C or below (molten solder temperature)
- Time : 10 seconds or less
- Preheating conditions: 120°C or below (package surface temperature)
- Number of times : One
- Flux : Rosin flux containing small amount of chlorine (The flux with a maximum chlorine content of 0.2 Wt% is recommended.)

(c) Cautions :

- Fluxes : Avoid removing the residual flux with freon-based and chlorine-based cleaning solvent.
- Avoid shorting between portion of frame and leads.

KAQY212G Series

4PIN 60V N.O TYPE
SOLID STATE RELAY-MOSFET OUTPUT

● Numbering System

KAQY212G X (Y)

Note :

KAQY212G = Part No.

X = Lead form option (blank 、 S or A)


Y = Tape and reel option (TLD 、 TRU)

Option	Description	Packing quantity
A (TLD)	surface mount type package + TLD tape & reel option	2000 units per reel
A (TRU)	surface mount type package + TRU tape & reel option	2000 units per reel
S (TLD)	small outline for surface mount type package + TLD tape & reel option	3000 units per reel
S (TRU)	small outline for surface mount type package + TRU tape & reel option	3000 units per reel

● Recommended Pad Layout for Surface Mount Lead Form


1. Surface mount type.

4-pin SMD

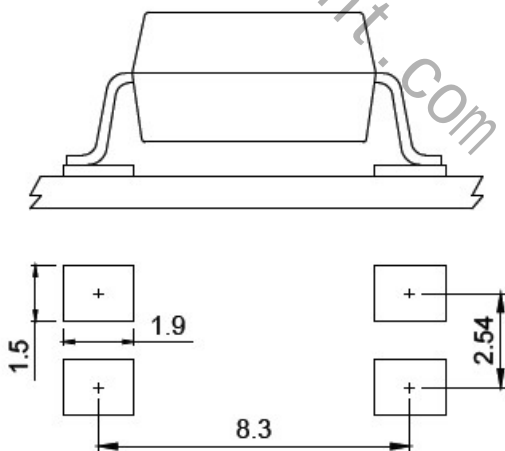

2. Small outline for surface mount type.

4-pin SOP

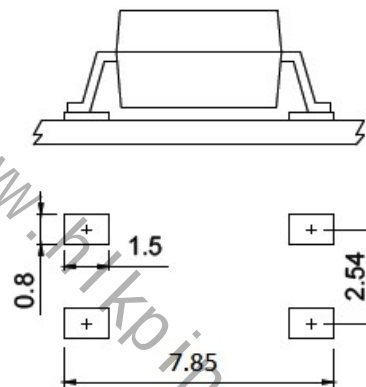


Unit : mm


KAQY212G Series

4PIN 60V N.O TYPE
SOLID STATE RELAY-MOSFET OUTPUT



● 4-pin SMD Carrier Tape & Reel

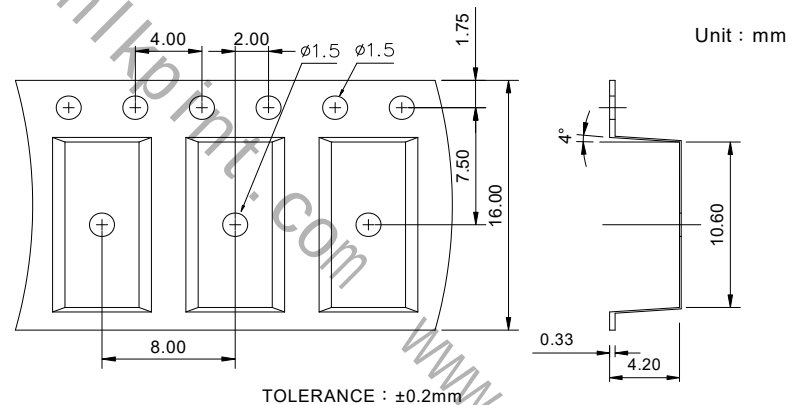


TLD

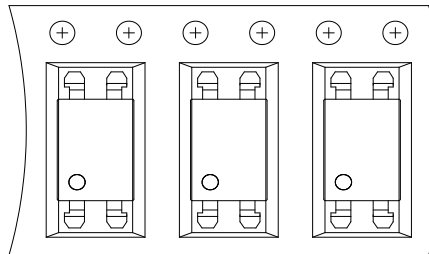



TRU

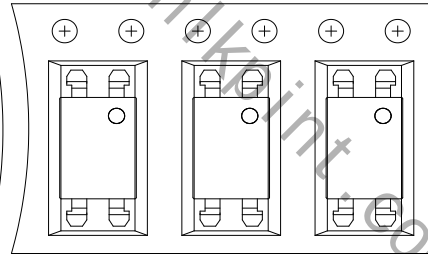

Direction of feed from reel



Direction of feed from reel

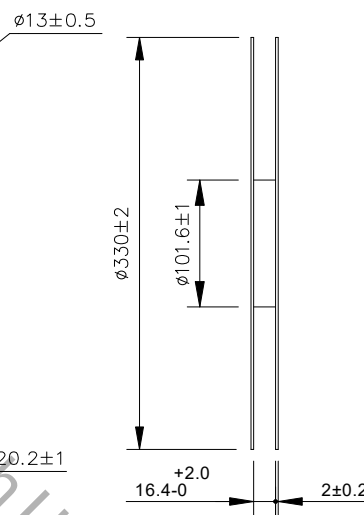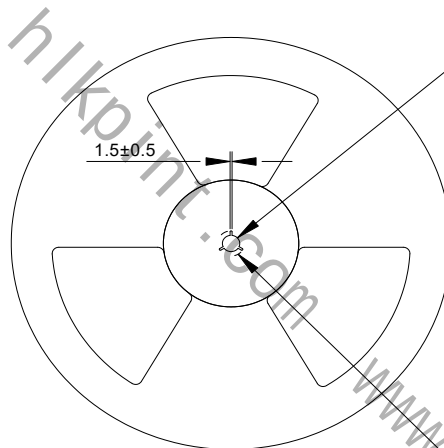


KAQY212G Series

4PIN 60V N.O TYPE
SOLID STATE RELAY-MOSFET OUTPUT



● 4-pin SOP Carrier Tape & Reel

Unit: mm

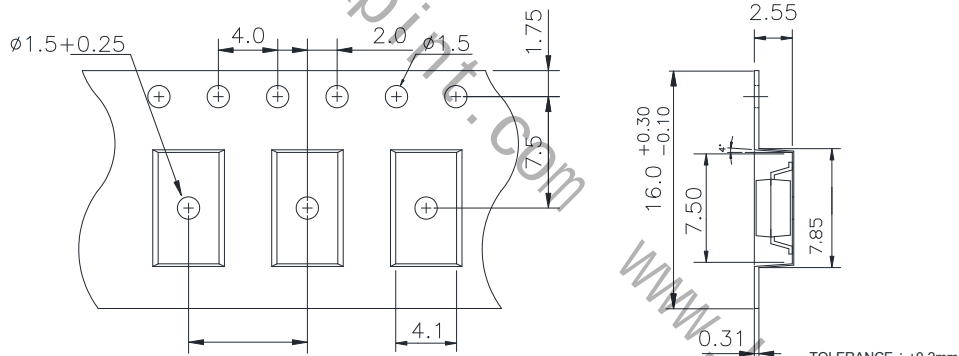


TLD

TRU

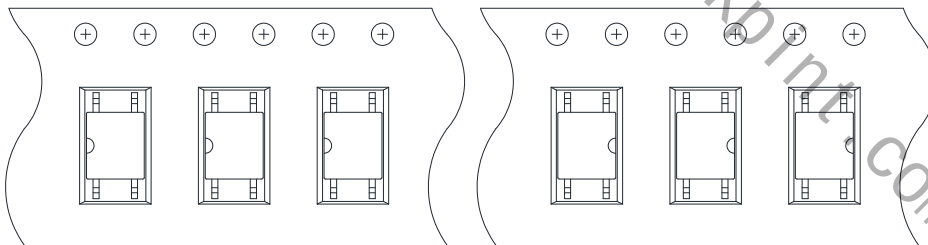

Direction of feed from reel



Direction of feed from reel

