
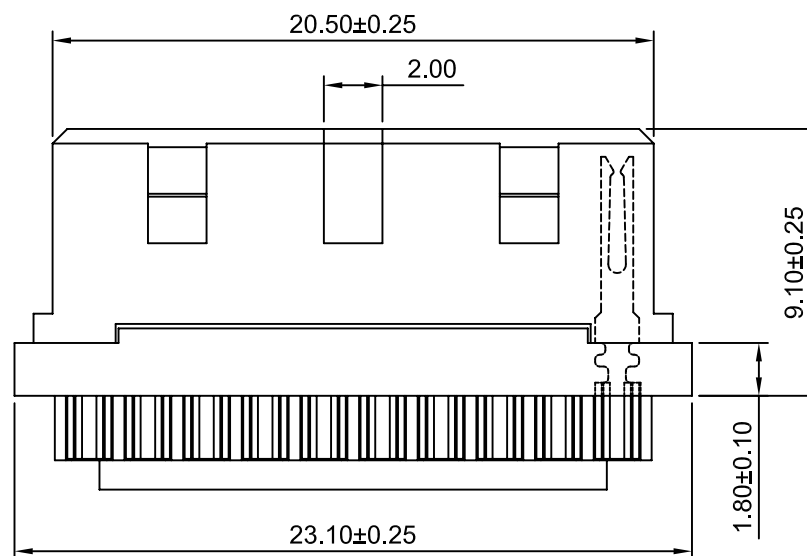


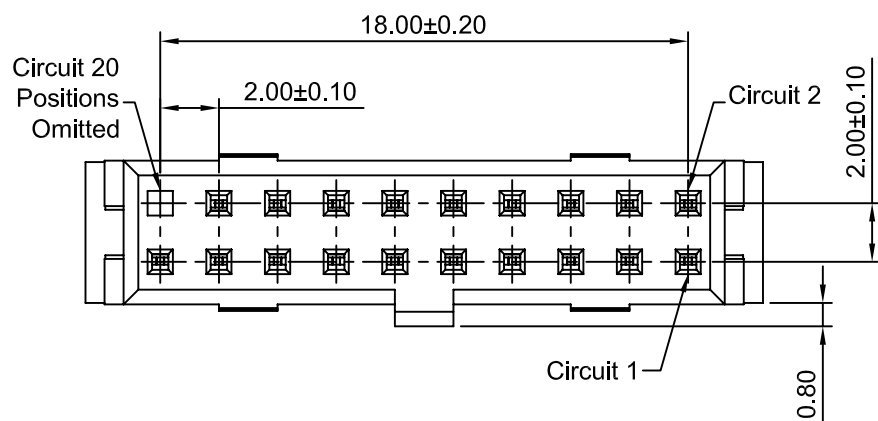

Ordering Information:

A2005HWVC-2x10P-K20 - ** - ***
1 2 3

1.Part No.

2.Color:

(blank):Black

BL:Blue

RD:Red

3.Finish:

(blank):Tin over Nickel


G:Gold over Nickel(1u")

G3:Gold over Nickel(3u")

G5:Gold over Nickel(5u")

G10:Gold over Nickel(10u")

G15:Gold over Nickel(15u")

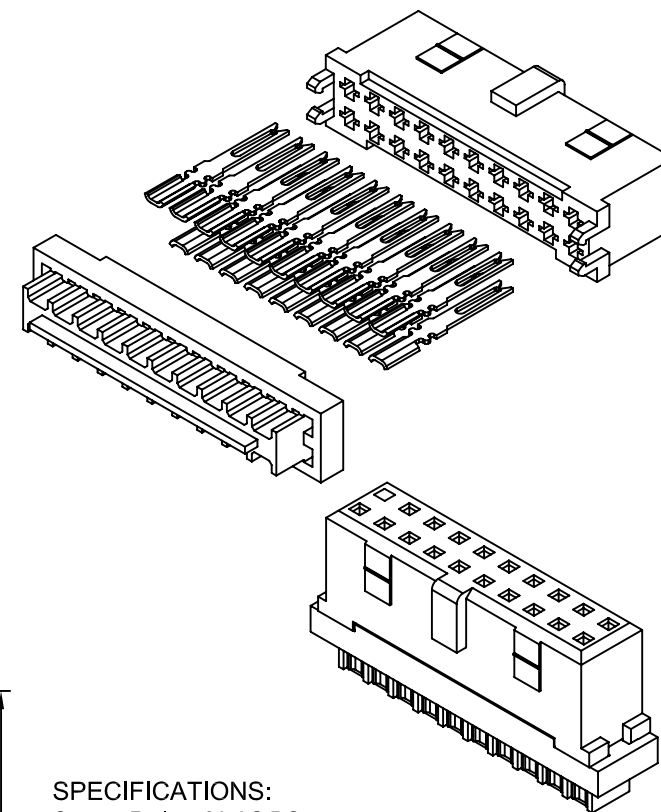

SPECIFICATIONS:

Current Rating: 2A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 500V AC/minute

Pin Material: Phosphor Bronze/Tin over Nickel

Material: LCP,UL94V-0(Black)

Beijing Hongli Kunpeng International Trade Co.,Ltd.

Unit	Scale	Sheet
mm	4:1	1 of 1
Draw BY:	Approved :	
Tony Su	Jack Yin	

Title :

2.00mm PITCH

180° Dual Row Box Header

General Tolerance			ANGLE±	DRAW NO :	REV
x.xx±0.25	x.xx±0.20	x.xx±0.15			
A0	NEW RELEASE	2011.11.22		HLB-05-HWVC-2x10P-K20 36	A0
REV	DESCRIPTION	DATE			