

KAQY412 Series


4PIN 60V N.C. TYPE

SOLID STATE RELAY-MOSFET OUTPUT


● Description

The KAQY412 series is robust, ideal for telecom and ground fault applications. It is a SPST normally close switch (1 Form B) that replaces electromechanical relays in many applications. It is constructed using a GaAlAs LED for actuation control and an integrated monolithic die for the switch output. The die, fabricated in a high-voltage dielectrically isolated technology, is comprised of a photodiode array, switch control circuitry and MOSFET switches.

● Schematic



1 FORM B
NORMALLY CLOSE



● Features

1. Normally close, single pole single throw
2. Control 60V AC or DC voltage
3. Switch 200mA loads
4. Controls low-level analog signals
5. High sensitivity, low ON resistance
6. Low-level off-state leakage current
7. High isolation voltage 5KV (DIP / SMD)
8. Pb free and RoHS compliant
9. MSL class 1
10. Agency Approvals :
 - UL Approved (No. E169586, E108430): UL1577, UL508
 - c-UL Approved (No. E169586, E108430)
 - VDE Approved (No. 40053989): EN60747-5-5

● Application

- Telecommunications (PC, electronic notepad)
- Modem
- Telephone equipment
- Security equipment
- Sensors
- Measuring and testing equipment
- Factory automation equipment
- High speed inspection machines


KAQY412 Series

4PIN 60V N.C. TYPE
SOLID STATE RELAY-MOSFET OUTPUT


● Outside Dimension

Unit : mm


1. Dual-in-line type.

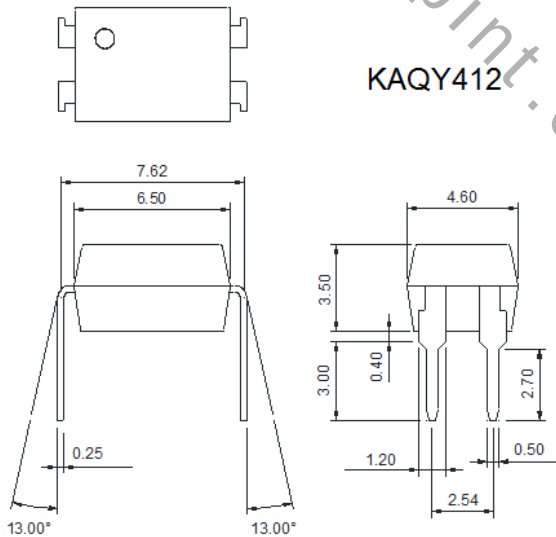

2. Surface mount type.

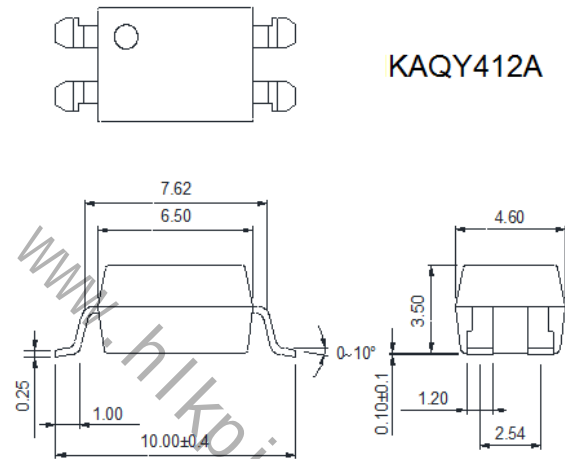


3. Small outline for surface mount type.

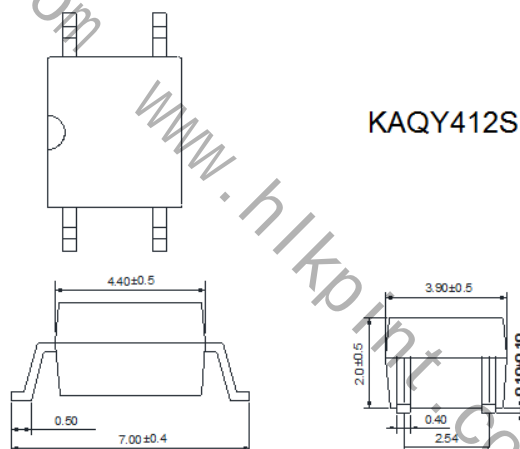

TOLERANCE : ±0.2mm

● Device Marking

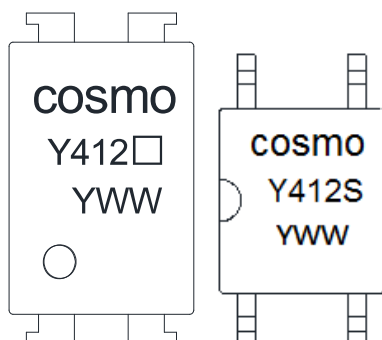

Notes :

cosmo

Y412□

Y412S

YWW

□ (Blank) : DIP or SMD

S : SOP

Y : Year code / W : Week code

KAQY412 Series

4PIN 60V N.C. TYPE
SOLID STATE RELAY-MOSFET OUTPUT

● Absolute Maximum Ratings

(Ta=25°C)


Item	Symbol	Rating	Unit
Input	Continuous forward current	I _F	50 mA
	Peak forward current	I _{FP}	1 A
	Reverse voltage	V _R	5 V
	Power dissipation	P _{in}	100 mW
	Derate linearly from 25°C	-	1.3 mW/°C
Output	Breakdown voltage	V _B	60 V
	Continuous load current	I _L	200 mA
	Power dissipation	P _{out}	500 mW
Isolation voltage		V _{iso}	KAQY412S 1500Vrms
Isolation resistance (Vio=500V)		R _{iso}	KAQY412 5000Vrms
Total power dissipation		P _t	≥ 10 ¹⁰ Ω
Derate linearly from 25°C		-	550 mW
Operating temperature		T _{opr}	2.5 mW/°C
Storage temperature		T _{stg}	-40 to +85 °C
Junction temperature		T _j	-40 to +125 °C
Soldering temperature 10 seconds		T _{sot}	100 °C
			260 °C

● Electro-optical Characteristics

(Ta=25°C)

Parameter	Symbol	Conditions	Min.	Avg.	Max.	Unit
Input	Forward voltage	V _F	I _F =10mA	-	1.2	1.5 V
	Operation input current	I _{FOFF}	V _L =20V, I _L ≤5μA	-	-	3.0 mA
	Recovery input current	I _{FON}	V _L =20V, I _L =100mA	0.2	-	- mA
Output	Breakdown voltage	V _B	I _B =50μA, I _F =10mA	60	-	- V
	Off-state leakage current	I _{LEAK}	V _L =60V, I _F =5mA	-	1.0	2.0 μA
I/O capacitance	C _{iso}	V _B =0V, f=1MHz	-	6	-	pF
ON resistance	R _{ON}	I _F =0mA, I _L =100mA	-	2.5	5	Ω
Reverse (ON) time	T _{ON}	I _F =10mA, V _L =20V	-	0.6	1.5	ms
Operate (OFF) time	T _{OFF}	I _L =100mA, t=10ms	-	0.3	1.5	ms



● Turn-on / Turn-off Time

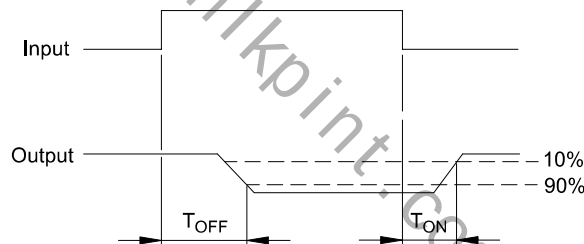

KAQY412 Series

4PIN 60V N.C. TYPE
SOLID STATE RELAY-MOSFET OUTPUT

● Schematic and Wiring Diagrams

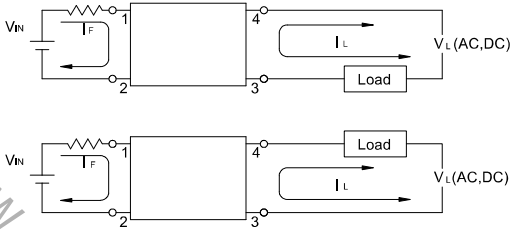Schematic	Output Configuration	Load	Connection	Wiring Diagrams
	1b	AC DC	-	

KAQY412 Series

4PIN 60V N.C. TYPE
SOLID STATE RELAY-MOSFET OUTPUT

Fig.1 Load Current vs. Ambient Temperature

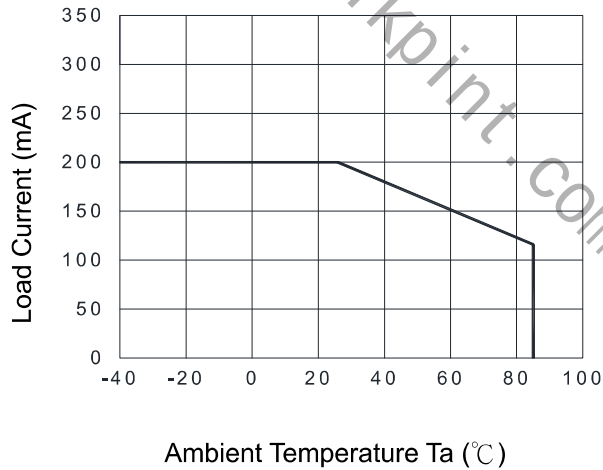


Fig.2 On Resistance vs. Ambient Temperature

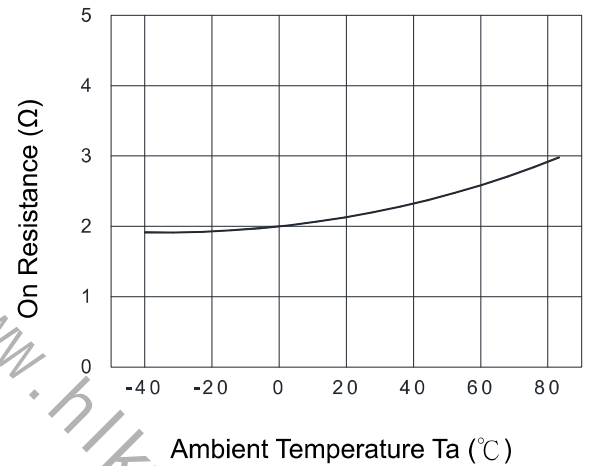


Fig.3 Operate (OFF) Time vs. Ambient Temperature

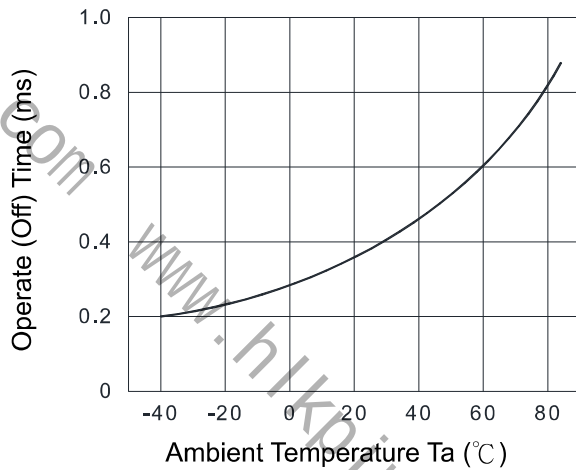


Fig.4 Reverse (ON) Time vs. Ambient Temperature

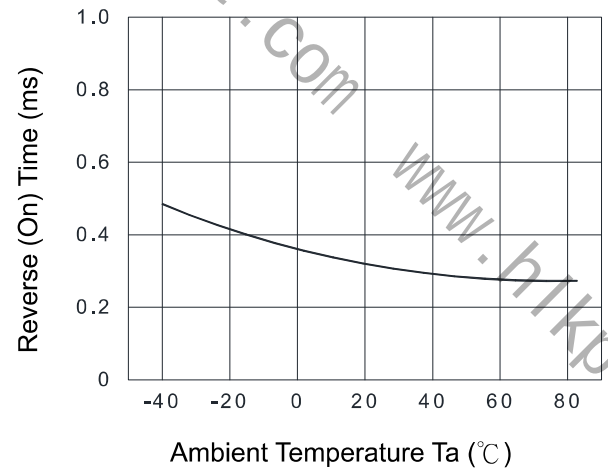


Fig.5 LED Operate Current vs. Ambient Temperature


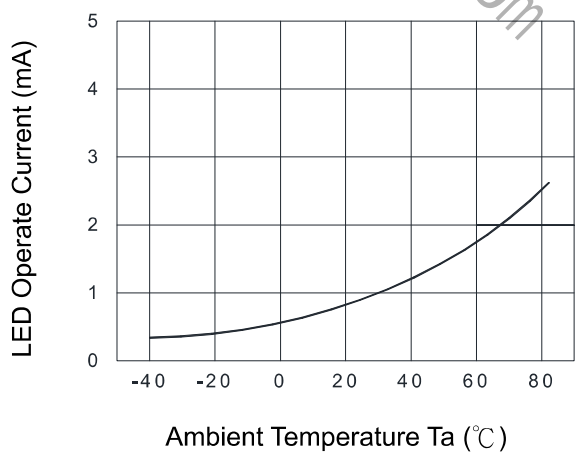


Fig.6 LED Turn-off Current vs. Ambient Temperature

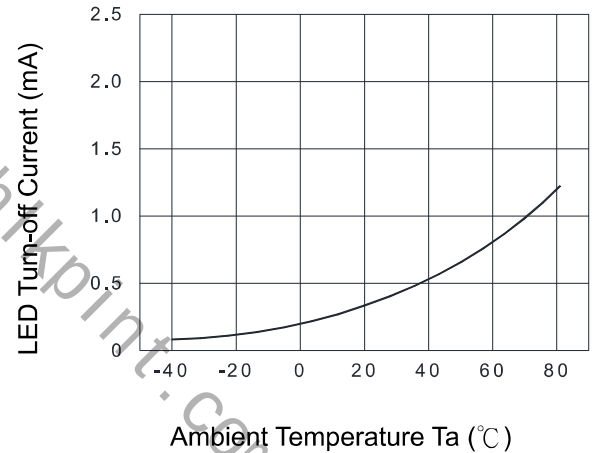

KAQY412 Series

4PIN 60V N.C. TYPE
SOLID STATE RELAY-MOSFET OUTPUT

Fig.7 LED Dropout Voltage vs. Ambient Temperature

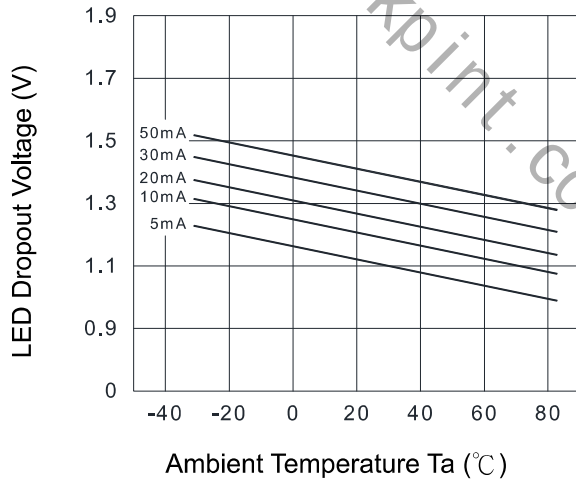


Fig.8 Voltage vs. Current Characteristics of Output at MOSFET Portion

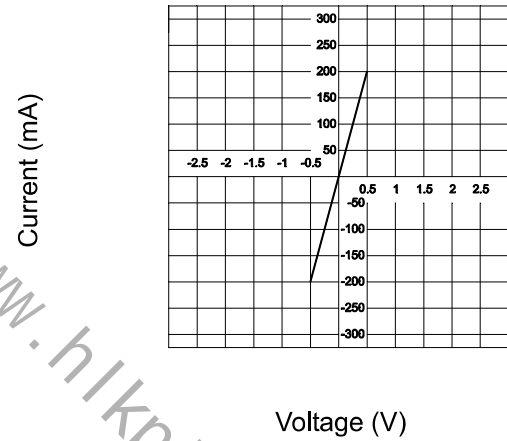


Fig.9 Operate (OFF) Time vs. LED Forward Current

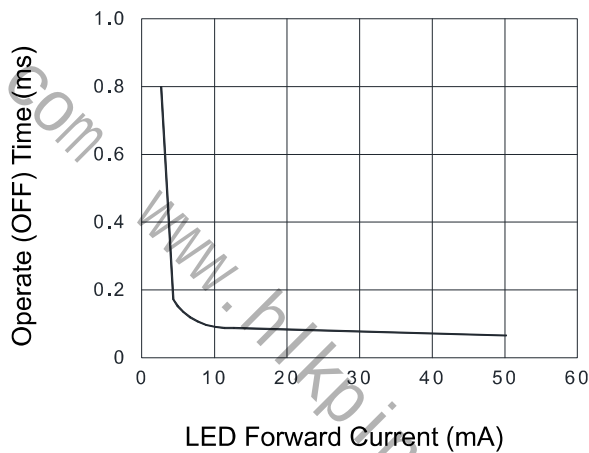


Fig.10 Off-state Leakage Current vs. Load Voltage

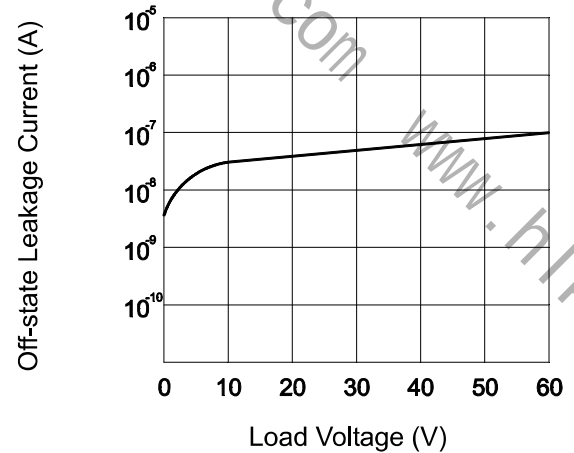


Fig.11 Reverse (ON) Time vs. LED Forward Current


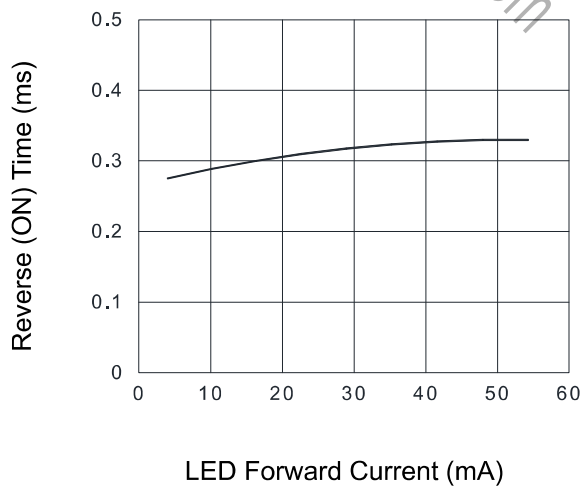


Fig.12 Output Capacitance vs. Applied Voltage

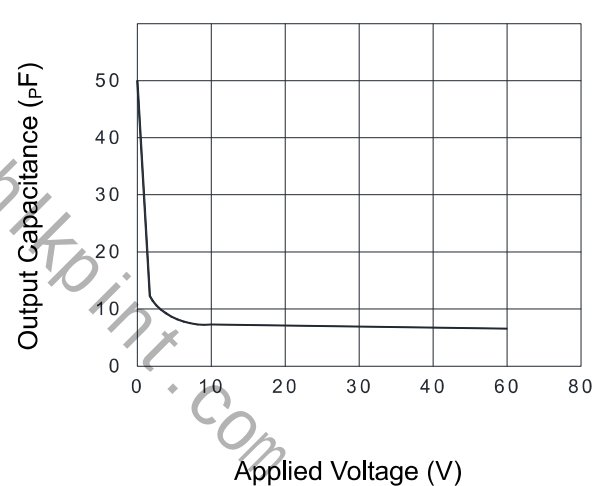


KAQY412 Series

4PIN 60V N.C. TYPE
SOLID STATE RELAY-MOSFET OUTPUT


● Using Methods

Examples of resistance value to control LED forward current ($I_F=5\text{mA}$)


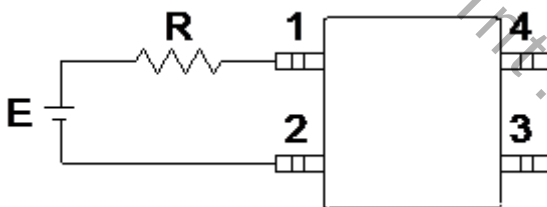


E	R
3.3V	Approx. 330 Ω
5V	Approx. 640 Ω
12V	Approx. 1.9K Ω
15V	Approx. 2.5K Ω
24V	Approx. 4.1K Ω

1. LED forward current must be more than 5mA , at E min.
2. LED forward current must be less than 50mA , at E max.

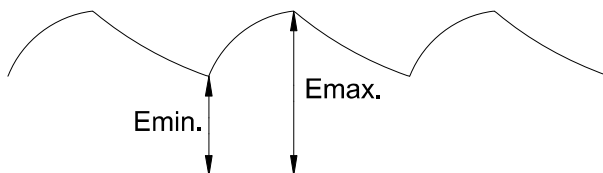

Regulate the spike voltage generated on the inductive load as follows :

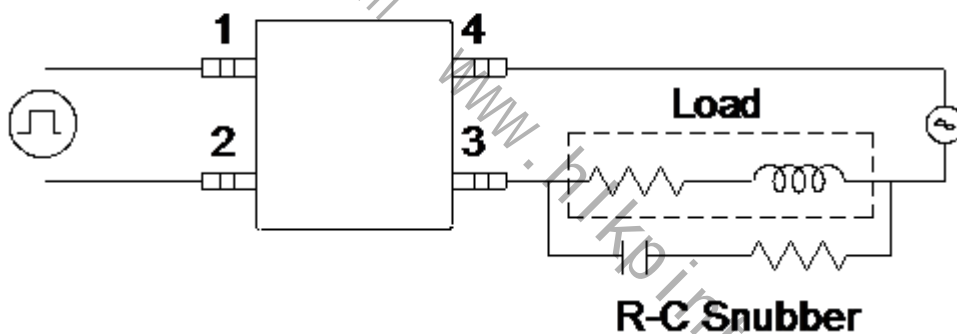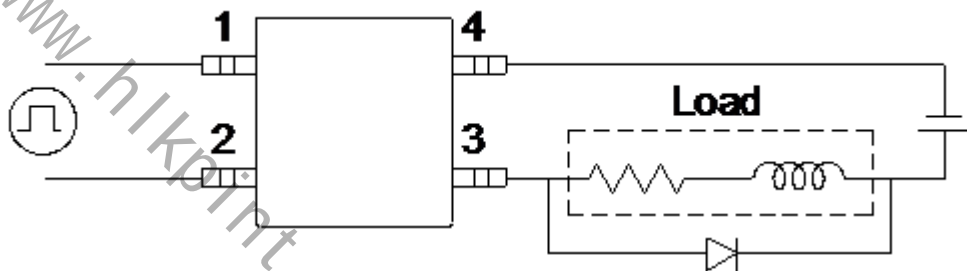

KAQY412 Series


4PIN 60V N.C. TYPE
SOLID STATE RELAY-MOSFET OUTPUT

● Recommended Soldering Conditions

(a) Infrared reflow soldering :

- Peak reflow soldering : 260°C or below (package surface temperature)
- Time of peak reflow temperature: 10 sec
- Time of temperature higher than 230°C : 30-60 sec
- Time to preheat temperature from 180~190°C : 60-120 sec
- Number of reflows : Rosin flux containing small amount of chlorine
- Flux : (The flux with a maximum chlorine content of 0.2 Wt% is recommended.)

Recommended Temperature Profile of Infrared Reflow

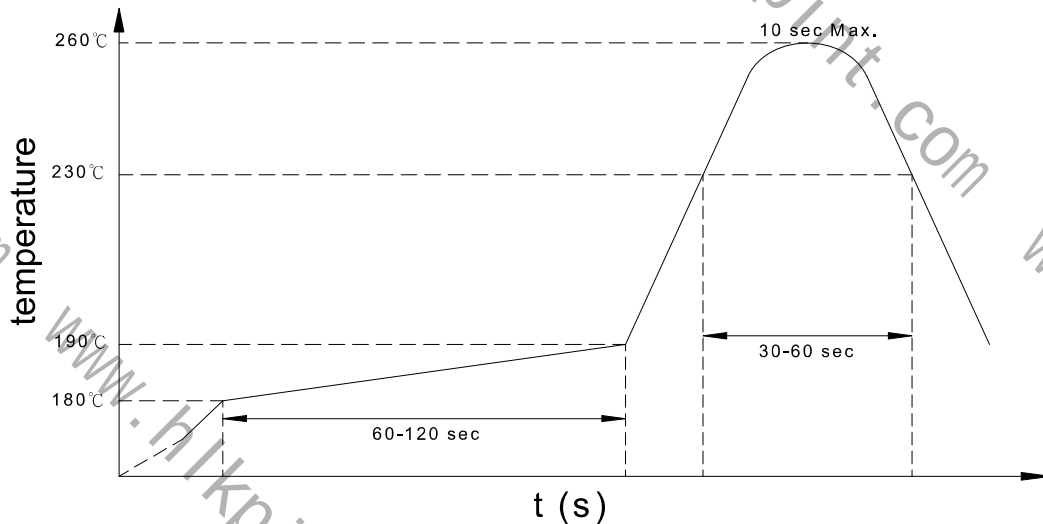

(b) Wave soldering :

- Temperature : 260°C or below (molten solder temperature)
- Time : 10 seconds or less
- Preheating conditions: 120°C or below (package surface temperature)
- Number of times : One
- Flux : Rosin flux containing small amount of chlorine (The flux with a maximum chlorine content of 0.2 Wt% is recommended.)

(c) Cautions :

- Fluxes : Avoid removing the residual flux with freon-based and chlorine-based cleaning solvent.
- Avoid shorting between portion of frame and leads.

KAQY412 Series

4PIN 60V N.C. TYPE
SOLID STATE RELAY-MOSFET OUTPUT

● Numbering System

KAQY412 X (Y)

Note :

KAQY412 = Part No.

X = Lead form option (blank 、 S or A)


Y = Tape and reel option (TLD 、 TRU)

Option	Description	Packing quantity
A (TLD)	surface mount type package + TLD tape & reel option	2000 units per reel
A (TRU)	surface mount type package + TRU tape & reel option	2000 units per reel
S (TLD)	small outline for surface mount type package + TLD tape & reel option	3000 units per reel
S (TRU)	small outline for surface mount type package + TRU tape & reel option	3000 units per reel

● Recommended Pad Layout for Surface Mount Lead Form


1. Surface mount type.

4-pin SMD

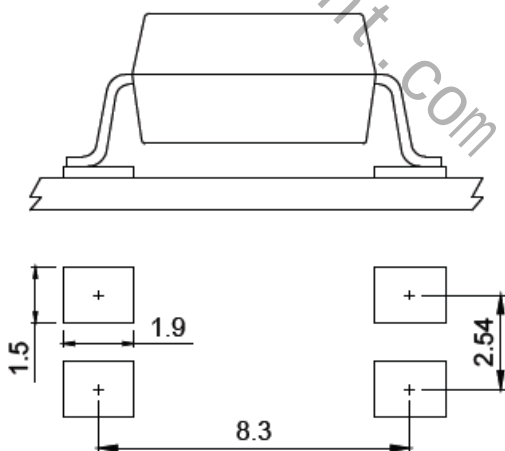

2. Small outline for surface mount type.

4-pin SOP

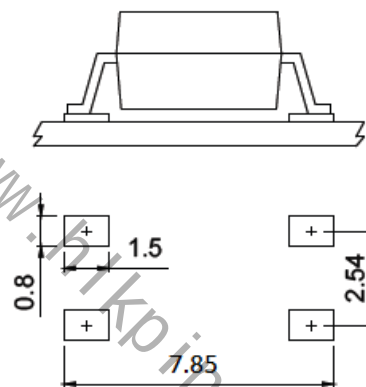


Unit : mm

KAQY412 Series

4PIN 60V N.C. TYPE
SOLID STATE RELAY-MOSFET OUTPUT

● 4-pin SMD Carrier Tape & Reel

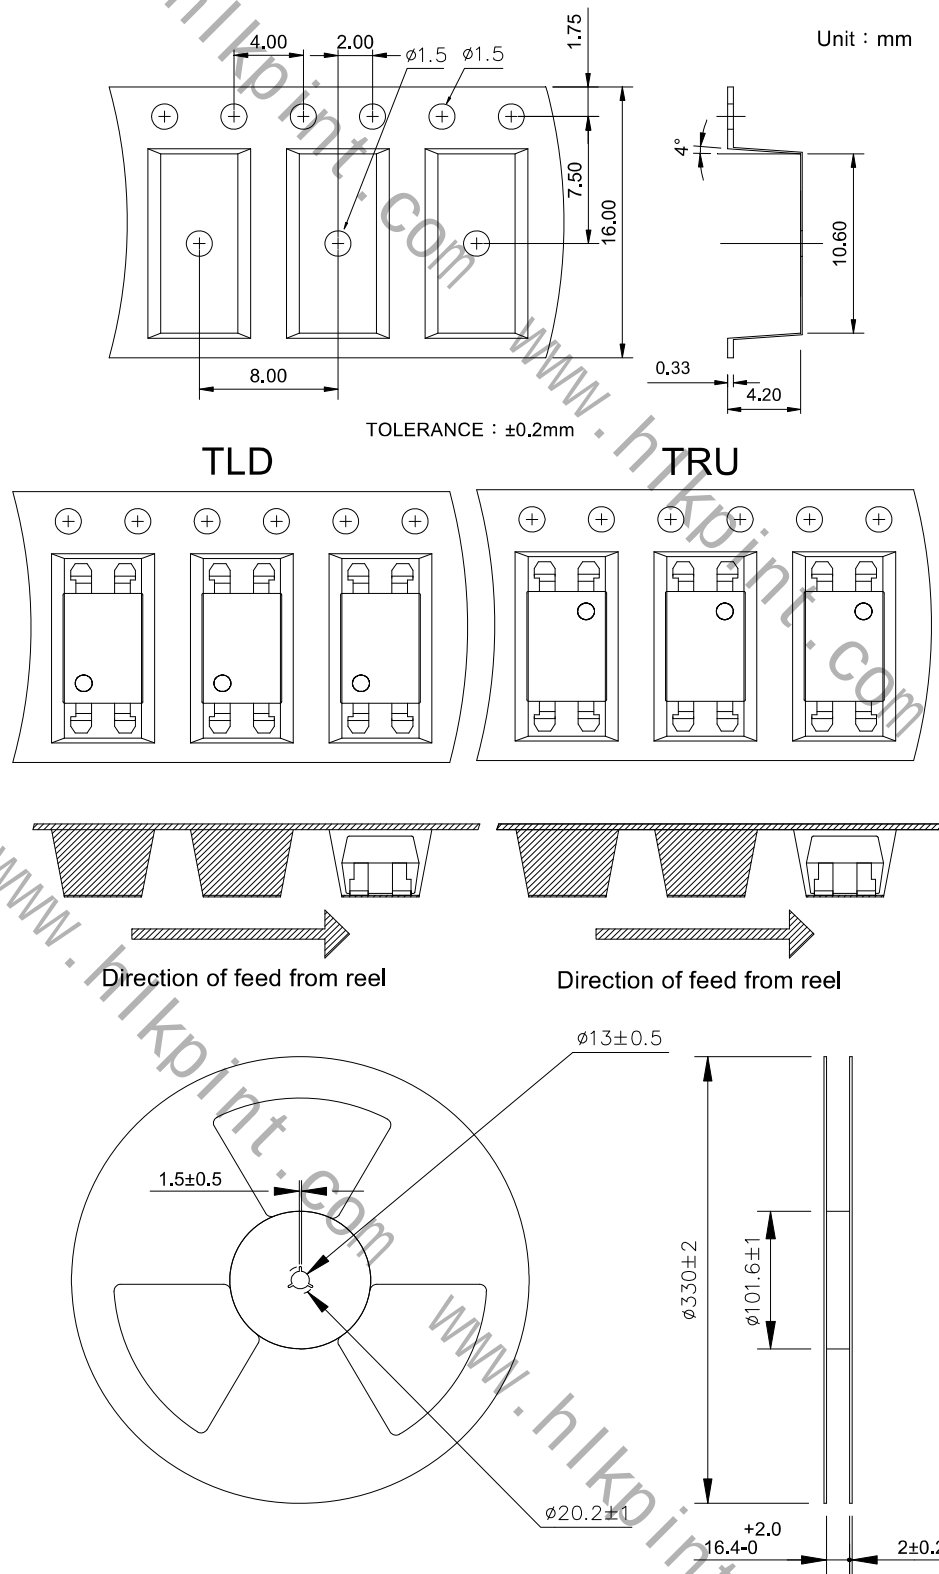

KAQY412 Series

4PIN 60V N.C. TYPE

SOLID STATE RELAY-MOSFET OUTPUT

● 4-pin SOP Carrier Tape & Reel

